



## CONTACT

Web [www.bradleycollection.com](http://www.bradleycollection.com)

Email [info@bradleycollection.com](mailto:info@bradleycollection.com)

Follow     

## WORLD

**The Bradley Collection Ltd**

Lion Barn • Maitland Road

Needham Market • Suffolk

IP6 8NS • UK

Telephone +44 (0)1449 722 72

Fax +44 (0)1449 722 728

## USA & Canada

**The Bradley Collection Inc.**

3625 Hayden Avenue, Suite E

Culver City • CA • 90232 • USA

Telephone 1 (310) 815 8255

Fax 1 (310) 815 9255

the**bradley**collection

**ECLIPSE  
ELECTRIC**

**EDITION SEVEN**

**19|20**

Specialised fixings for mounting brackets will be required in certain situations and are not provided as standard.  
Steel items are not recommended for damp conditions such as shower rooms.  
Crystal finials and acrylic poles should not be positioned in direct sunlight, and are not suitable for use in conservatories.  
Brass items are supplied unlacquered and will tarnish over time.

The Bradley Collection reserves the right to modify design and materials without prior notice as part of a process of continual product improvement. Due to printing limitations, colours in this brochure may not be accurate.

Products are protected by Design Rights, under provisions of Copyright, Designs & Patents Act 1988.

Bradley®, The Bradley Collection® and  Logo are registered Community trademarks of The Bradley Collection Ltd. In Europe and registered trademarks of the Bradley Collection, Inc. in the USA.

Printed 0819 • Copyright © The Bradley Collection Ltd. 2019



**Pictured:** ø38mm (1 1/2") Classic Coverpole • Standard Stud • Brass Toned

**Project by:** Gallagher London - London SW7 - UK

## ECLIPSE ELECTRIC

Peerless and opulent, this collection truly has no rival.

A rare, luxurious aesthetic and freedom of expression in design are balanced with the final word in functionality and control.

The world's finest.



Pictured: ø38mm (1 1/2") Classic Coverpole • Standard Stud • Brass Toned  
 Project by: Gallagher London - London SW7 - UK

# ECLIPSE ELECTRIC

Sublime curtain pole covers in brass, wood, steel and stainless steel. Teamed with state of the art electric tracks to create a true design statement.

Pole systems powered by a choice of leading brands; Silent Gliss, Somfy and Lutron.

For windows where motorisation is not required, hand drawn versions are also available.

## PROGRESSIVE

The use of authentic stainless steel lends the progressive design group its distinctive modern feel.



**Pictured:** ø38mm (1½") Progressive Coverpole • Faceted Disc • Brushed

## CLASSIC

Classic designs are created using traditional mild steel, allowing soft contours and subtle translucent effects.



**Pictured:** ø38mm (1½") Classic Coverpole • Standard Stud • Waxed

## DECO

Solid wood & real brass are the heroes within the Deco design group. Classical styling is sharpened to suit contemporary taste.



**Pictured:** ø50mm (2") Deco Wood Coverpole • Slate • Flute • Polished Nickel

Eclipse provides elegant decorative pole covers, finials & brackets in a selection of authentic materials, with a choice of superb electric tracks and controls.



**Pictured -** ø50mm (2") Deco Brass Coverpole • Squat Ball • Aged Brass

## LEADING MOTOR OPTIONS




# FINISHES

Metal poles and components may all be finished in this entire palette of subtle colour coats in matte, satin or gloss finishes and metallic coats in satin or gloss.

Progressive, Classic and Deco elements each have some additional specific finishes, based on their inherent material properties. These specialist finishes are listed on the individual final pages.

Coat options Matte (M) • Satin (S) • Gloss (G) • Paint over Tulip Wood (P)

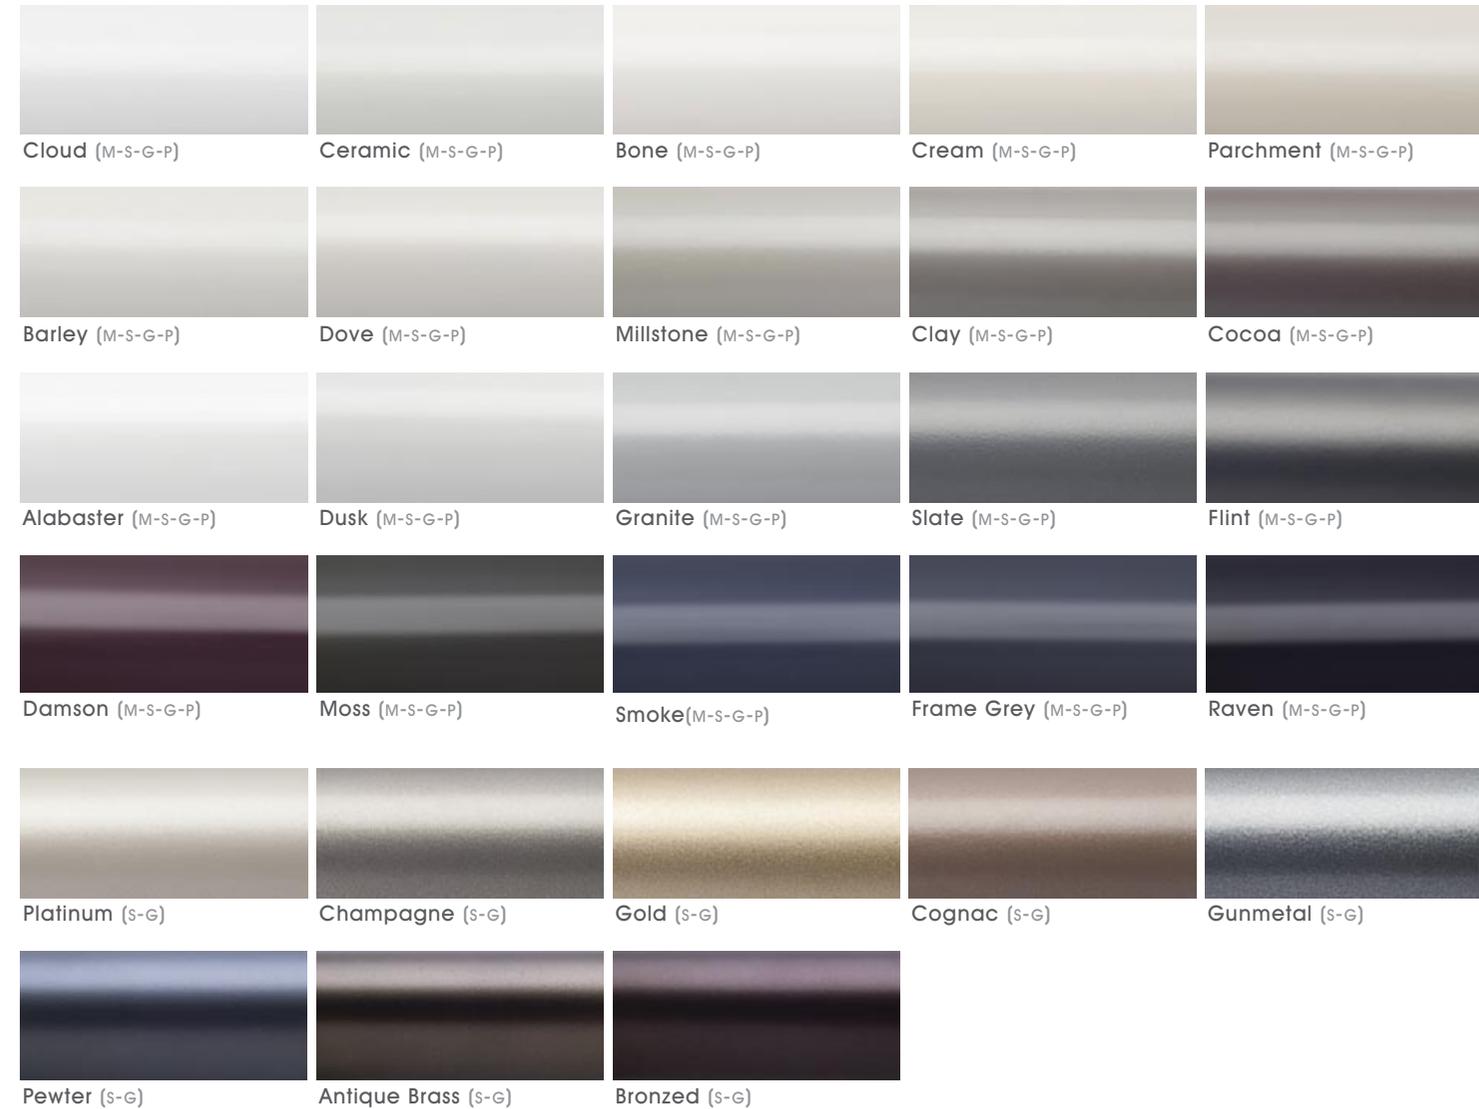

Due to printing limitations colours in this brochure may not be accurate  
Samples are available on request - [www.bradleycollection.com/samples/](http://www.bradleycollection.com/samples/)

M Matte finishes have a maximum section length of 2.4m (94")



**Pictured:** ø30mm (1 1/8") Progressive Coverpole • Ball • Brushed Brass Tint

**Interior design:** Furnished by Anna - @furnishedbyanna - Sevenoaks - UK

**Photography:** Ryan Wicks @ryanwicksphoto

# FINIALS

## PROGRESSIVE

This contemporary design edit emphasises and enhances the sharp, architectural nature of stainless steel.

**Picture:** ø38mm (1½") Progressive Coverpole • Contrast Stud • Brushed



### Flush End Cap<sup>Ⓜ</sup> - Supplied as standard

ø30mm (1¾") Inclusive Length 6mm (¼")  
 ø38mm (1½") Inclusive Length 6mm (¼")  
 ø50mm (2") Inclusive Length 6mm (¼")



### Octagon Stud

ø30mm (1¾") Inclusive Length 10mm (¾")  
 ø38mm (1½") Inclusive Length 11mm (7⁄16")  
 ø50mm (2") Inclusive Length 14mm (2⁄16")



### Faceted Disc

ø30mm (1¾") Inclusive Length 31mm (1¼")  
 ø38mm (1½") Inclusive Length 45mm (1¾")  
 ø50mm (2") Inclusive Length 59mm (2½⁄16")



### Contrast Stud

ø30mm (1¾") Inclusive Length 17mm (11⁄16")  
 ø38mm (1½") Inclusive Length 20mm (13⁄16")  
 ø50mm (2") Inclusive Length 23mm (7⁄16")



### Ball

ø30mm (1¾") Inclusive Length 52mm (21⁄16")  
 ø38mm (1½") Inclusive Length 65mm (27⁄16")  
 ø50mm (2") Inclusive Length 86mm (33⁄16")



### Pebble

ø30mm (1¾") Inclusive Length 37mm (17⁄16")  
 ø38mm (1½") Inclusive Length 54mm (27⁄16")  
 ø50mm (2") Inclusive Length 70mm (27⁄16")



### Large Disc

ø30mm (1¾") Inclusive Length 6mm (¼")  
 ø38mm (1½") Inclusive Length 7mm (¼")  
 ø50mm (2") Inclusive Length 8mm (5⁄16")



### Crystal Ball

ø30mm (1¾") Inclusive Length 58mm (25⁄16")  
 ø38mm (1½") Inclusive Length 69mm (211⁄16")  
 ø50mm (2") Inclusive Length 88mm (37⁄16")



### Squat Disc

ø30mm (1¾") Inclusive Length 26mm (1")  
 ø38mm (1½") Inclusive Length 37mm (17⁄16")  
 ø50mm (2") Inclusive Length 48mm (17⁄16")

## FINISHES

ADDITIONAL TO THOSE SHOWN ON PAGE 91

A brushed stainless steel base provides an edgy finish to Progressive Eclipse, with specially developed tints providing a change of mood to suit the needs of the project.



Brushed Stainless

Brass Tint+<sup>Ⓞ</sup>



Bronze Tint+<sup>Ⓞ</sup>

Carbon Tint+<sup>Ⓞ</sup>

+ A finishing charge will apply Ⓞ Longer lead-times will apply  
 Due to printing limitations colours in this brochure may not be accurate  
 Samples are available on request - [www.bradleycollection.com/samples/](http://www.bradleycollection.com/samples/)

Ⓜ Please note that if this option is selected finials cannot be added at a later date.



# FINIALS

## CLASSIC

A subtle softness of hand is the signature of this edit. Classic rounded cues counterpoint a more contemporary streamlining of scale. These classic shapes are complemented by a palette of finishes developed to emphasise the intrinsic quality of mild steel.



### Flush End Cap<sup>xx</sup> - Supplied as standard

- ø30mm (1 3/16") Inclusive Length 6mm (1/4")
- ø38mm (1 1/2") Inclusive Length 6mm (1/4")
- ø50mm (2") Inclusive Length 6mm (1/4")



### Standard Stud

- ø30mm (1 3/16") Inclusive Length 8mm (5/16")
- ø38mm (1 1/2") Inclusive Length 9mm (9/16")
- ø50mm (2") Inclusive Length 10mm (3/8")



### Large Stud

- ø30mm (1 3/16") Inclusive Length 8mm (5/16")
- ø38mm (1 1/2") Inclusive Length 9mm (9/16")
- ø50mm (2") Inclusive Length 10mm (3/8")



### Button Stud

- ø30mm (1 3/16") Inclusive Length 44mm (1 11/16")
- ø38mm (1 1/2") Inclusive Length 58mm (2 2/16")
- ø50mm (2") Inclusive Length 69mm (2 11/16")



### Ball & Collar

- ø30mm (1 3/16") Inclusive Length 54mm (2 1/8")
- ø38mm (1 1/2") Inclusive Length 65mm (2 9/16")
- ø50mm (2") Inclusive Length 86mm (3 3/8")

For full technical information, sizes and weights please download the specification guide - [www.bradleycollection.com/specification-guides/](http://www.bradleycollection.com/specification-guides/)

<sup>xx</sup> Please note that if this option is selected finials cannot be added at a later date.

## FINISHES ADDITIONAL TO THOSE SHOWN ON PAGE 91

The beauty of the mild steel base of the Classic design group shines through with these special translucent finishes.



Polished      Natural Steel      Brass Toned      Matte Brass Toned      Oil Rubbed      Waxed

Due to printing limitations colours in this brochure may not be accurate. Samples are available on request - [www.bradleycollection.com/samples/](http://www.bradleycollection.com/samples/)

Pictured: ø38mm (1 1/2") Classic Coverpole • Standard Stud • Waxed

# FINIALS

## DECO

Traditional artisan materials of wood and brass are treated sympathetically but not reverentially in the Deco group. Traditional design cues are recognisable, while a shift of emphasis gives a fresher transitional feel, with some designs being unashamedly modern.

Hand drawn pole and ring versions of the Deco design group are available on request.



**Picture:** ø50mm (1 7/8") Deco Wood Coverpole • Jacobean Oak • Squat Ball • Aged Brass

# FINIALS DECO



**Flush End Cap** ~ - Supplied as standard  
 ø50mm (2") Inclusive Length 8mm (5/16")



**Contrast Stud**  
 ø50mm (2") Inclusive Length 23mm (7/8")



**Wooden Contrast Stud**  
 ø50mm (2") Inclusive Length 23mm (7/8")



**Flute**  
 ø50mm (2") Inclusive Length 103mm (4 1/16")



**Squat Ball**  
 ø50mm (2") Inclusive Length 91mm (3 5/8")



**Wooden Squat Ball**  
 ø50mm (2") Inclusive Length 91mm (3 5/8")



**Templar**  
 ø50mm (2") Inclusive Length 122mm (4 13/16")



**Crystal Templar**  
 ø50mm (2") Inclusive Length 122mm (4 13/16")



**Wooden Templar**  
 ø50mm (2") Inclusive Length 122mm (4 13/16")



**Discus**  
 ø50mm (2") Inclusive Length 9mm (3/8")



**Ribbed Sphere**  
 ø50mm (2") Inclusive Length 127mm (5")



**Wooden Ribbed Sphere**  
 ø50mm (2") Inclusive Length 127mm (5")

## FINISHES ADDITIONAL TO THOSE SHOWN ON PAGE 91

The textures and natural colours of wood and brass are inherently pleasing, so they are enhanced by subtle treatments, which allow the natural properties of the material to speak.



Aged Brass\*

Waxed Brass



Polished Brass\*

\* Brass finishes are supplied unlacquered and will tarnish over time a clear lacquer may be applied on request as a custom finish

### Finial & bracket finishes only



Polished Nickel+Ⓢ


+ A finishing charge will apply Ⓢ Longer lead-times will apply

### Wood coverpole & finial finishes only

Other wood stained finishes are available on request.



Aged Oak  
 Stain Over Ash

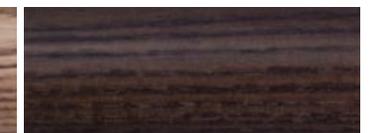

Jacobean Oak  
 Stain Over Ash



Mahogany  
 Stain Over Ash



Ebony  
 Stain Over Ash

# BRACKETS

## Single Brackets

Side	Diameter	Projection from wall to track centre	Fixing plate size
	ø30mm (1 3/16") ø38mm (1 1/2") ø50mm (2")	100mm (4") 100mm (4") 100mm (4")	w34mm (1 3/16") x H70mm (2 3/4") w52mm (2 1/16") x H104mm (4 1/8") w52mm (2 1/16") x H104mm (4 1/8")

Mid	Mid - Joining	Diameter	Projection from wall to track centre	Fixing plate size
		ø30mm (1 3/16") ø38mm (1 1/2") ø50mm (2")	100mm (4") 100mm (4") 100mm (4")	w70mm (2 3/4") x H34mm (1 3/16") w104mm (4 1/8") x H52mm (2 1/16") w104mm (4 1/8") x H52mm (2 1/16")

## Ceiling Brackets

Flush	Flush - Joining	Diameter	Drop from ceiling to top of pole	Fixing plate size
		ø30mm (1 3/16") ø38mm (1 1/2") ø50mm (2")	3mm (1/8") 3mm (1/8") 3mm (1/8")	w70mm (2 3/4") x H34mm (1 3/16") w70mm (2 3/4") x H34mm (1 3/16") w70mm (2 3/4") x H34mm (1 3/16")

## Double Brackets

Side	Diameter	Projection from wall to track centre	Fixing plate size
	Fø38mm (1 1/2") Bø30mm (1 3/16") Fø50mm (2") Bø38mm (1 1/2")	F160mm (6 5/16") B 60mm (2 3/8") F160mm (6 5/16") B 60mm (2 3/8")	w52mm (2 1/16") x H104mm (4 1/8") w52mm (2 1/16") x H104mm (4 1/8")

Mid	Mid - Joining	Diameter	Projection from wall to track centre	Fixing plate size
		Fø38mm (1 1/2") Bø30mm (1 3/16") Fø50mm (2") Bø38mm (1 1/2")	F160mm (6 5/16") B 60mm (2 3/8") F160mm (6 5/16") B 60mm (2 3/8")	w104mm (4 1/8") x H52mm (2 1/16") w104mm (4 1/8") x H52mm (2 1/16")

# ELECTRIC OPTIONS



## Silent Gliss 5100

Ø38mm (1 1/2") • 50mm (2")

Straight poles maximum length 5 Metres (16.5ft)<sup>⌘</sup>  
 Standard rollers and Wave® gliders  
 AC hidden motor options  
 Touch and go manual operation  
 System allows manual operation during power failure  
 Quiet motors, noise level at 300mm (1') <36dBA  
 Wireless remote controls  
 No pre-wiring necessary

## Silent Gliss 5600

Ø30mm (1 3/16") • 38mm (1 1/2") • 50mm (2")

Straight poles maximum length 15 Metres (49ft)<sup>⌘</sup>  
 Bespoke bay service  
 Standard gliders and rollers & Wave® gliders and rollers  
 DC & AC hidden motor options  
 Touch and go manual operation  
 System allows manual operation during power failure  
 Quiet motors, noise level at 300mm (1') <36dBA  
 Wireless remote control, app control or home automation integration



## Somfy

Ø38mm (1 1/2") • 50mm (2")

Straight poles maximum length 12 Metres (39ft)<sup>⌘</sup>  
 Standard roller and Ripple rollers  
 Mains & Battery concealed motor options  
 Touch and go manual operation  
 System allows manual operation during power failure  
 Quiet motors, noise level at 1000mm (3') <44dBA  
 Fully compatible with Somfy RTS  
 Wireless remote control, app control or home automation integration



## Lutron

Ø38mm (1 1/2") • 50mm (2")

Straight poles maximum length 9.0 Metres (29.5ft)<sup>⌘</sup>  
 Bespoke bay service  
 Standard roller and Ripplefold® rollers  
 Low voltage concealed motors  
 Three motor ratings for differing curtain weights  
 Quiet motors, noise level at 1000mm (3') <44dBA  
 Fully compatible with Lutron® QS Home Automation systems  
 Wireless remote control, app control or home automation integration

# SILENT GLISS® 5100

## Poles

Poles are cut to suit individual requirements. When calculating the length of your pole, remember to allow tolerance beyond the width of the frame for the curtains to stack back to the edge of the window.

Maximum Coverpole length in one piece 2.9m (114")\*. Poles exceeding the maximum length will be cut into equal parts unless otherwise specified. A joining bracket will need to be specified.

Size	Maximum distance between brackets	Minimum bend radius
∅38mm (1 1/2")	1500mm (60")	n/a
∅50mm	1500mm (60")	n/a

\*Lengths over 2.4m (96") will incur a handling charge

## Motor options

### 5090 Motor



Mains powered motor with integrated radio receiver for use with remote control options. Supplied with plug and 5m of cable. Suitable for systems up to 5M (16.5ft)

## Control options

### Wall Switch



Single & Multi-channel wall mounted remote control options available.

### Remote Control



Single & Multi-channel hand held remote control options available.

### Wall Timer



Single & Multi-channel wall mounted options available.


## Gliding Options

### Rollers



Drop from bottom of track: 20mm (13/16")

### Wave® gliders

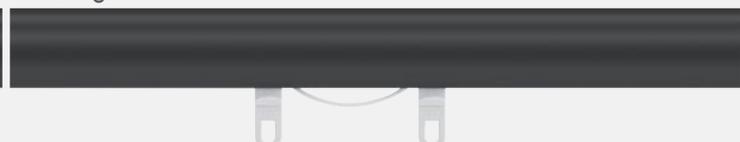

Drop from bottom of track: 20mm (13/16")  
Wave® Pitch: 80mm (3 1/8")

\* Supplied in sections - maximum section length 2.9m (9.5ft)  
Weight restrictions apply. For full technical information please refer to the specification guide. [www.bradleycollection.com/specification-guides/](http://www.bradleycollection.com/specification-guides/)

# SILENT GLISS® 5600

## Poles

Poles are cut and bent to suit individual requirements. When calculating the length of your pole, remember to allow tolerance beyond the width of the frame for the curtains to stack back to the edge of the window.

Maximum Coverpole length in one piece 2.9m (114")\*. Poles exceeding the maximum length will be cut into equal parts unless otherwise specified. A joining bracket will need to be specified.

Size	Maximum distance between brackets	Minimum bend radius
∅30mm (1 3/16")	1500mm (60")	n/a
∅38mm (1 1/2")	1500mm (60")	R275mm (10 13/16")
∅50mm	1500mm (60")	R275mm (10 13/16")

\*Lengths over 2.4m (96") will incur a handling charge

## Motor options

### 9060 Motor



Mains powered motor. Requires professional installation. Suitable for systems up to 15M (49ft)

### 9060 Motor with radio module



Mains powered motor, with radio module for use with remote control options. Requires professional installation. Suitable for systems up to 15M (49ft)

Smart Expansion Module<sup>§</sup> also available

## Control options

### Remote Control



Single & Multi-channel hand held remote control options available.

### App Control Move & Smart



The system can be controlled with the Silent Gliss Move<sup>«</sup> app allow control on smart devices. Or via the Smart<sup>§</sup> system allowing integration with all major home control systems

## Gliding Options

### Gliders



Drop from bottom of track: 20mm (13/16")

### Rollers\*



Drop from bottom of track: 20mm (13/16")

### Wave® gliders



Drop from bottom of track: 20mm (13/16")  
Wave® Pitch: 80mm (3 1/8")

### Wave® rollers\*



Drop from bottom of track: 20mm (13/16")  
Wave® Pitch: 80mm (3 1/8")

\* Supplied in sections - maximum section length 2.9m (9.5ft) \* Supplied as standard on systems over 2.9m (9.5ft) with single stack curtains  
« Move server set 9960 is required for use with this app § Smart only available in United Kingdom, requires Smart Expansion Module  
Weight restrictions apply. For full technical information please refer to the specification guide. [www.bradleycollection.com/specification-guides/](http://www.bradleycollection.com/specification-guides/)

# SOMFY® GLYDEA & IRISMO

## Poles

Poles are cut to suit individual requirements. When calculating the length of your pole, remember to allow tolerance beyond the width of the frame for the curtains to stack back to the edge of the window.

Maximum Coverpole length in one piece 2.9m (114")\*. Poles exceeding the maximum length will be cut into equal parts unless otherwise specified. A joining bracket will need to be specified.



Size	Maximum distance between brackets	Minimum bend radius
∅38mm (1 1/2")	1500mm (60")	n/a
∅50mm	1500mm (60")	n/a

\*Lengths over 2.4m (96") will incur a handling charge

## Motor options

### Glydea



Mains powered motor, with integrated radio receiver for use with remote control options. Requires professional installation. Suitable for systems up to 12M (39ft).

### Irismo



Battery powered motor, with integrated radio receiver for use with remote control options. Single charge lasts up to six months. Requires no pre-wiring. Suitable for systems up to 10M (33ft).

## Control options

### Remote Control



Single channel wall switch & Multi-channel hand held remote control options available.

### App Control Tahoma & Automation systems



The system can be controlled with the Somfy Tahoma app or through smart devices & Amazon Alexa. The system can also be intergrated with all major home control systems.

## Gliding Options

### Rollers



Drop from bottom of track:  
20mm (13/16")

### Ripple rollers



Drop from bottom of track:  
20mm (13/16")  
Ripple Pitch:  
80mm (3 1/8")

\* Supplied in sections - maximum section length 2.9m (9.5ft)  
Weight restrictions apply. For full technical information please refer to the specification guide. [www.bradleycollection.com/specification-guides/](http://www.bradleycollection.com/specification-guides/)

# LUTRON® SIVOIA

## Poles

Poles are cut and bent to suit individual requirements. When calculating the length of your pole, remember to allow tolerance beyond the width of the frame for the curtains to stack back to the edge of the window.

Maximum Coverpole length in one piece 2.9m (114")\*. Poles exceeding the maximum length will be cut into equal parts unless otherwise specified. A joining bracket will need to be specified.



Size	Maximum distance between brackets	Minimum bend radius
∅38mm (1 1/2")	1500mm (60")	∅275mm (10 13/16")
∅50mm	1500mm (60")	∅275mm (10 13/16")

## Motor options

### Motor



Three mains powered motor options available D105 • D145 • D175 Requires professional installation. Suitable for systems up to 15M (49ft)

### Motor with radio dongle



Three mains powered motor options available D105 • D145 • D175, with radio dongle for use with remote control options. Requires professional installation. Suitable for systems up to 15M (49ft)

## Control options

### Remote Control



Single & Multi-channel hand held remote control options available.

### App Control RA2 Select Hub & Automation systems



The system can be controlled with the Lutron app or through smart devices & Amazon Alexa. The system can also be intergrated with all major home control systems.

## Gliding Options

### Rollers



Drop from bottom of track:  
12mm (7/16")

### Ripplefold® rollers



Drop from bottom of track:  
20mm (13/16")  
Ripplefold® Fullness:  
80% • 100% • 120%

\* Supplied in sections - maximum section length 2.9m (9.5ft)  
Weight restrictions apply. For full technical information please refer to the specification guide. [www.bradleycollection.com/specification-guides/](http://www.bradleycollection.com/specification-guides/)