



Web www.bradleycollection.com

Email info@bradleycollection.com

Follow us on



World

The Bradley Collection Ltd • Lion Barn • Maitland Road • Needham Market • Suffolk • IP6 8NS • UK

Telephone +44 (0)1449 722 724 Fax +44 (0)1449 722 728

USA & Canada

The Bradley Collection Inc. • 3625 Hayden Avenue, #E • Culver City • CA • 90232 • USA

Telephone +1 (310) 815 8255 Fax +1 (310) 815 9255

Specialised fixings for mounting brackets will be required in certain situations and are not provided as standard.
Steel items are not recommended for damp conditions such as shower rooms. • Crystal finials should not be positioned in direct sunlight.

The Bradley Collection reserves the right to modify design and materials without prior notice as part of a process of continual product improvement.

Products are protected by Design Rights, under provisions of Copyright, Designs & Patents Act 1988.

Bradley®, The Bradley Collection® and  Logo are registered Community trademarks of The Bradley Collection Ltd. in Europe and registered trademarks of the Bradley Collection, Inc. in the USA.

the**bradley**collection

EDITION FIVE

ECLIPSE



Pictured - ø30mm (1 1/8") Progressive Coverpole • Contrast Stud • Brushed Stainless

ECLIPSE

The innovative Eclipse collection fuses decorative pole covers & smooth running track to provide a new standard in functionality and a contemporary, streamlined look.

Progressive and Classic round cover styles are joined by the sharp-edge Elemental design. Offered in carbon steel and bamboo, this new group is at the cutting edge for style and sustainability.

The addition of the unique Rotary Drive system completely eliminates any child safety concerns from traditional cording and promises a paradigm shift in remote curtain control.



Pictured: ø30mm (1 1/8") Progressive Coverpole • Contrast Stud • Brushed Stainless

UNDERSTANDING ECLIPSE

Eclipse consists of a decorative coverpole and finial concealing a functional track system, with the assembly clamped together by clever bracket design.

There is a choice of styling options for coverpole and finial; Classic, Progressive and Elemental and a choice of Rotary Drive (patent applied for) or Electric motor curtain control options.

To specify Eclipse, begin by selecting the coverpole style

Classic

Round cover in Traditional Steel

Progressive

Round cover in Stainless Steel

Elemental

Rectangular Cover in Steel or Bamboo

Then select the required control mechanism

Rotary Drive (patent applied for)

Electric - Powered by Silent Gliss®

Electric - Powered by Lutron®



CLASSIC STEEL



PROGRESSIVE STAINLESS STEEL



ELEMENTAL STEEL & BAMBOO



CLASSIC STEEL



The intrinsic quality of steel is expressed through translucent coated finishes and soft, traditional styling cues.

Pictured - \varnothing 38mm (1 1/2") Classic Coverpole • Stud • Polished



FINIALS

A subtle softness of hand is the signature of this edit. Classic rounded cues counterpoint a more contemporary streamlining of scale.



Stud

- \varnothing 30mm (1 3/16") Inclusive Length 8mm (5/16")
- \varnothing 38mm (1 1/2") Inclusive Length 9mm (3/8")
- \varnothing 50mm (2") Inclusive Length 10mm (3/8")



Large Stud

- \varnothing 30mm (1 3/16") Inclusive Length 8mm (5/16")
- \varnothing 38mm (1 1/2") Inclusive Length 9mm (3/8")
- \varnothing 50mm (2") Inclusive Length 10mm (3/8")



Button Stud

- \varnothing 30mm (1 3/16") Inclusive Length 44mm (1 11/16")
- \varnothing 38mm (1 1/2") Inclusive Length 58mm (2 2/16")
- \varnothing 50mm (2") Inclusive Length 69mm (2 11/16")



Ball

- \varnothing 30mm (1 3/16") Inclusive Length 54mm (2 1/8")
- \varnothing 38mm (1 1/2") Inclusive Length 65mm (2 7/16")
- \varnothing 50mm (2") Inclusive Length 86mm (3 3/8")

FINISHES

The purity of the signature polished steel finish is complemented by a palette of tints developed to emphasise the intrinsic quality of authentic steel.


Other coated finishes may also be specified on request.



Polished




Polished Brass Tint



Polished Copper Tint



Polished Bronze Tint



Waxed

PROGRESSIVE STAINLESS STEEL



This contemporary design grouping emphasises and enhances the sharp, architectural nature of stainless steel.

Pictured - \varnothing 30mm (1 $\frac{3}{16}$ " Progressive Coverpole • Disc • Brushed Stainless



FINIALS

A leading-edge design edit, characterised by detailing which is sharp and purposeful but remains understated.



Stud

- \varnothing 30mm (1 $\frac{3}{16}$ " Inclusive Length 6mm ($\frac{1}{4}$ ")
- \varnothing 38mm (1 $\frac{1}{2}$ " Inclusive Length 7mm ($\frac{1}{4}$ ")
- \varnothing 50mm (2" Inclusive Length 8mm ($\frac{5}{16}$ ")



Disc

- \varnothing 30mm (1 $\frac{3}{16}$ " Inclusive Length 6mm ($\frac{1}{4}$ ")
- \varnothing 38mm (1 $\frac{1}{2}$ " Inclusive Length 7mm ($\frac{1}{4}$ ")
- \varnothing 50mm (2" Inclusive Length 8mm ($\frac{5}{16}$ ")



Contrast Stud

- \varnothing 30mm (1 $\frac{3}{16}$ " Inclusive Length 17mm (1 $\frac{1}{16}$ ")
- \varnothing 38mm (1 $\frac{1}{2}$ " Inclusive Length 20mm (1 $\frac{3}{16}$ ")
- \varnothing 50mm (2" Inclusive Length 23mm ($\frac{7}{8}$ ")



Ball

- \varnothing 30mm (1 $\frac{3}{16}$ " Inclusive Length 52mm (2 $\frac{1}{16}$ ")
- \varnothing 38mm (1 $\frac{1}{2}$ " Inclusive Length 65mm (2 $\frac{7}{16}$ ")
- \varnothing 50mm (2" Inclusive Length 86mm (3 $\frac{3}{8}$ ")

FINISHES

A group of unique metal tints serves to reveal rather than obscure the machined qualities and personality of the stainless steel.

Other coated finishes may also be specified on request.

Coat options Matte (M) • Satin (S) • Gloss (G)



Brushed Stainless



Brushed Brass Tint



Brushed Copper Tint



Brushed Bronze Tint



Brushed Carbon Tint



Cloud (M-S-G)




Dove (M-S-G)



Millstone (M-S-G)



Slate (M-S-G)



Flint (M-S-G)

Due to printing limitations colours in this brochure may not be accurate. Samples are available on request - www.bradleycollection.com/samples/

M Matte finishes have a maximum pole length of 2.4m (94")

ELEMENTAL STEEL & BAMBOO



Linear, modern and minimalist, this design group is well named; Elemental

Pictured - 45mm (1 3/4") Elemental Coverpole • Millstone - Wash on Bamboo



COVERPOLE OPTIONS

Elemental has no external finial options reflecting the clean cut, understated and integrated nature of the design



Steel Coverpole & Components

The soft edged steel cover is the perfect carrier for solid coated colours, with brackets finished to match.



Bamboo Coverpole with Steel Components

Colour-washing softens the precise, hard-edges of bamboo, whilst retaining the character of the wood. Brackets are finished in the equivalent solid colour.

FINISHES

A short edit of contemporary colours is offered, available in solid-coat form onto a steel base and as a colour-wash onto engineered bamboo.

Other coated finishes may also be specified on request.

Coat options Matte (M) • Satin (S) • Gloss (G)



Cloud (M-S-G)




Dove (M-S-G)



Millstone (M-S-G)



Slate (M-S-G)



Flint (M-S-G)




Cloud Wash on Bamboo



Dove Wash on Bamboo



Millstone Wash on Bamboo



Slate Wash on Bamboo



Flint Wash on Bamboo

Due to printing limitations colours in this brochure may not be accurate. Samples are available on request - www.bradleycollection.com/samples/

M Matte finishes have a maximum pole length of 2.4m (94")

ROTARY DRIVE OPTIONS



Round Ø30mm (1 3/16") • 38mm (1 1/2") • 50mm (2") - Flat H45mm (1 3/4")

- Unique new Rotary Drive system (patent applied for), eliminates child safety concerns
- Geared system for rapid curtain operation
- Large, heavy curtains move with minimal user effort
- Custom length Rotary Drive handle for user comfort
- Free spinning system protects from accidental damage
- Suitable for large expanse, interlined and heavy curtains
- Sleeve guard protects curtain fabric
- Straight poles maximum length 15 Metres (49ft)‡
- Bespoke bay service◊
- Standard and Wave® gliders and rollers
- Ripplefold rollers



Pictured - ø38mm (1 1/2") Classic Coverpole • Rotary Drive • Ball • Polished




Geared rotary solution that removes the need for cording



Concealed control rod



Folding handle spins freely when curtains are manually opened.



Sleeve Guard designed to protect drapes

Gliding Options

Gliders	Rollers*	Wave® gliders	Wave® rollers*	Ripplefold® rollers
Drop from bottom of track: 20mm (13/16")	Drop from bottom of track: 20mm (13/16")	Drop from bottom of track: 20mm (13/16")	Drop from bottom of track: 20mm (13/16")	Drop from bottom of track: 20mm (13/16")
		Wave® Pitch: 80mm (3 1/8")	Wave® Pitch: 80mm (3 1/8")	Ripplefold® Fullness: 80% • 100% • 120%

‡ Supplied in sections - maximum section per length 2.9m (9.5ft)
* Supplied as standard on systems over 2.9m (9.5ft) with single stack curtains
◊ Excludes Elemental

Weight restrictions apply, for full technical information please refer to the specification guide.
www.bradleycollection.com/specification-guides/

ELECTRIC OPTIONS POWERED BY SILENT GLISS®



Round Ø30mm (1 3/16") • 38mm (1 1/2") • 50mm (2") - Flat H45mm (1 3/4")

- Straight poles maximum length 15 Metres (49ft)[⌘]
- Bespoke bay service[◊]
- Standard and Wave® gliders and rollers
- DC & AC hidden motor options
- Touch and go manual operation
- System allows manual operation during power failure
- Quiet motors, noise level at 300mm (1') <36dBA
- Wireless controls or home automation



Powered by Silent Gliss®
9060 motor



Concealed motors



Remote control through
modular radio receiver
and 9940 remote



Control through Silent
Gliss® - Move app[⌘]

Gliding Options

Gliders



Drop from bottom of track:
20mm (13/16")

Rollers*



Drop from bottom of track:
20mm (13/16")

Wave® gliders



Drop from bottom of track:
20mm (13/16")
Wave® Pitch:
80mm (3 1/8")

Wave® rollers*



Drop from bottom of track:
20mm (13/16")
Wave® Pitch:
80mm (3 1/8")



Pictured - ø38mm (1 1/2") Classic Coverpole • Electric - Powered by Silent Gliss® • Large Stud • Polished

[⌘] Supplied in sections - maximum section per length 2.9m (9.5ft)
[◊] Supplied as standard on systems over 2.9m (9.5ft) with single stack curtains
[◊] Excludes Elemental ◀ Move server set 9960 is required for use with this app

Weight restrictions apply, for full technical information please refer to the specification guide.
www.bradleycollection.com/specification-guides/



ELECTRIC OPTIONS POWERED BY LUTRON®

Round Ø38mm (1½") • 50mm (2") - Flat H45mm (1¾")

- Straight poles maximum length 9.0 Metres (29.5ft)[‡]
- Bespoke bay service
- Standard and Ripplefold® rollers
- Low voltage concealed motors
- Three motor ratings for differing curtain weights
- Quiet motors, noise level at 1000mm (3') <44dBA
- Fully compatible with Lutron® QS Home Automation systems
- Stand-alone remote control options



Pictured - Ø38mm (1½") Classic Coverpole • Electric - Powered by Lutron® • Button Stud • Polished




Powered by Lutron®



Concealed motors



Remote control through QS wireless dongle & Pico remote

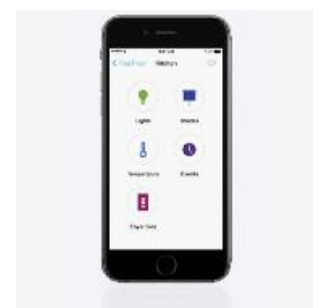

Control through QS home automation systems


Gliding Options

Rollers



Drop from bottom of track:
12mm (7/16")

Ripplefold® rollers

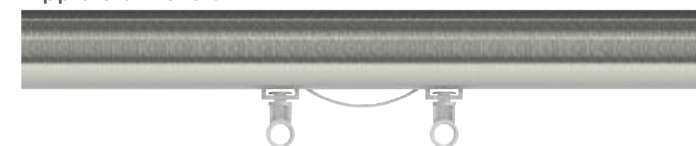

Drop from bottom of track:
20mm (13/16")




Ripplefold® Fullness:
80% • 100% • 120%

[‡] Supplied in sections - maximum section per length 2.9m (9.5ft)
[◊] Excludes Elemental



Weight restrictions apply, for full technical information please refer to the specification guide.
www.bradleycollection.com/specification-guides/


BRACKETS

Single Brackets




Side	Diameter	Projection from wall to track centre	Coverpole centre to track centre	Fixing plate size
	ø30mm (1 3/16")	100mm (4") • 160mm (6 5/16")	Rotary/Silent Gliss 19mm (3/4") Lutron 18mm (1 1/16")	w34mm (1 5/16") x h70mm (2 3/4")
	ø38mm (1 1/2")	100mm (4") • 160mm (6 5/16")	Rotary/Silent Gliss 19mm (3/4") Lutron 18mm (1 1/16")	w34mm (1 5/16") x h70mm (2 3/4")
	ø50mm (2")	100mm (4") • 160mm (6 5/16")	Rotary/Silent Gliss 19mm (3/4") Lutron 18mm (1 1/16")	w34mm (1 5/16") x h70mm (2 3/4")
	Flat45mm (1 3/4")	100mm (4") • 160mm (6 5/16")	Rotary/Silent Gliss 19mm (3/4") Lutron 18mm (1 1/16")	w34mm (1 5/16") x h70mm (2 3/4")
Mid	Diameter	Projection from wall to track centre	Coverpole centre to track centre	Fixing plate size
	ø30mm (1 3/16")	100mm (4") • 160mm (6 5/16")	Rotary/Silent Gliss 19mm (3/4") Lutron 18mm (1 1/16")	w70mm (2 3/4") x h34mm (1 5/16")
	ø38mm (1 1/2")	100mm (4") • 160mm (6 5/16")	Rotary/Silent Gliss 19mm (3/4") Lutron 18mm (1 1/16")	w70mm (2 3/4") x h34mm (1 5/16")
	ø50mm (2")	100mm (4") • 160mm (6 5/16")	Rotary/Silent Gliss 19mm (3/4") Lutron 18mm (1 1/16")	w70mm (2 3/4") x h34mm (1 5/16")
	Flat45mm (1 3/4")	100mm (4") • 160mm (6 5/16")	Rotary/Silent Gliss 19mm (3/4") Lutron 18mm (1 1/16")	w70mm (2 3/4") x h34mm (1 5/16")
Mid - Joining	Diameter	Projection from wall to track centre	Coverpole centre to track centre	Fixing plate size
	ø30mm (1 3/16")	100mm (4") • 160mm (6 5/16")	Rotary/Silent Gliss 19mm (3/4") Lutron 18mm (1 1/16")	w70mm (2 3/4") x h34mm (1 5/16")
	ø38mm (1 1/2")	100mm (4") • 160mm (6 5/16")	Rotary/Silent Gliss 19mm (3/4") Lutron 18mm (1 1/16")	w70mm (2 3/4") x h34mm (1 5/16")
	ø50mm (2")	100mm (4") • 160mm (6 5/16")	Rotary/Silent Gliss 19mm (3/4") Lutron 18mm (1 1/16")	w70mm (2 3/4") x h34mm (1 5/16")
	Flat45mm (1 3/4")	100mm (4") • 160mm (6 5/16")	Rotary/Silent Gliss 19mm (3/4") Lutron 18mm (1 1/16")	w70mm (2 3/4") x h34mm (1 5/16")

Ceiling Brackets

Flush	Flush - Joining	Diameter	Drop from ceiling to top of pole	Fixing plate size
		ø30mm (1 3/16")	3mm (1/8")	w68mm (2 11/16") x h37mm (1 7/16")
		ø38mm (1 1/2")	3mm (1/8")	w68mm (2 11/16") x h37mm (1 7/16")
		ø50mm (2")	3mm (1/8")	w68mm (2 11/16") x h37mm (1 7/16")
		Flat45mm (1 3/4")	3mm (1/8")	w68mm (2 11/16") x h37mm (1 7/16")

Ceiling	Flush - Joining	Diameter	Drop from ceiling to top of pole	Fixing plate size
		ø30mm (1 3/16")	50mm (2")	w70mm (2 3/4") x h34mm (1 5/16")
		ø38mm (1 1/2")	50mm (2")	w70mm (2 3/4") x h34mm (1 5/16")
		ø50mm (2")	50mm (2")	w70mm (2 3/4") x h34mm (1 5/16")
		Flat45mm (1 3/4")	50mm (2")	w70mm (2 3/4") x h34mm (1 5/16")

Double Brackets

Side	Diameter	Projection from wall to track centre	Coverpole centre to track centre	Fixing plate size
	ø30mm (1 3/16")	f160mm (6 5/16") b adjustable	Rotary/Silent Gliss 19mm (3/4") Lutron 18mm (1 1/16")	w34mm (1 5/16") x h70mm (2 3/4")
	ø38mm (1 1/2")	f160mm (6 5/16") b adjustable	Rotary/Silent Gliss 19mm (3/4") Lutron 18mm (1 1/16")	w34mm (1 5/16") x h70mm (2 3/4")
	ø50mm (2")	f160mm (6 5/16") b adjustable	Rotary/Silent Gliss 19mm (3/4") Lutron 18mm (1 1/16")	w34mm (1 5/16") x h70mm (2 3/4")
	Flat45mm (1 3/4")	f160mm (6 5/16") b adjustable	Rotary/Silent Gliss 19mm (3/4") Lutron 18mm (1 1/16")	w34mm (1 5/16") x h70mm (2 3/4")
Mid	Diameter	Projection from wall to track centre	Coverpole centre to track centre	Fixing plate size
	ø30mm (1 3/16")	f160mm (6 5/16") b adjustable	Rotary/Silent Gliss 19mm (3/4") Lutron 18mm (1 1/16")	w70mm (2 3/4") x h34mm (1 5/16")
	ø38mm (1 1/2")	f160mm (6 5/16") b adjustable	Rotary/Silent Gliss 19mm (3/4") Lutron 18mm (1 1/16")	w70mm (2 3/4") x h34mm (1 5/16")
	ø50mm (2")	f160mm (6 5/16") b adjustable	Rotary/Silent Gliss 19mm (3/4") Lutron 18mm (1 1/16")	w70mm (2 3/4") x h34mm (1 5/16")
	Flat45mm (1 3/4")	f160mm (6 5/16") b adjustable	Rotary/Silent Gliss 19mm (3/4") Lutron 18mm (1 1/16")	w70mm (2 3/4") x h34mm (1 5/16")
Mid - Joining	Diameter	Projection from wall to track centre	Coverpole centre to track centre	Fixing plate size
	ø30mm (1 3/16")	f160mm (6 5/16") b adjustable	Rotary/Silent Gliss 19mm (3/4") Lutron 18mm (1 1/16")	w70mm (2 3/4") x h34mm (1 5/16")
	ø38mm (1 1/2")	f160mm (6 5/16") b adjustable	Rotary/Silent Gliss 19mm (3/4") Lutron 18mm (1 1/16")	w70mm (2 3/4") x h34mm (1 5/16")
	ø50mm (2")	f160mm (6 5/16") b adjustable	Rotary/Silent Gliss 19mm (3/4") Lutron 18mm (1 1/16")	w70mm (2 3/4") x h34mm (1 5/16")
	Flat45mm (1 3/4")	f160mm (6 5/16") b adjustable	Rotary/Silent Gliss 19mm (3/4") Lutron 18mm (1 1/16")	w70mm (2 3/4") x h34mm (1 5/16")

Poles

Poles are cut and bent to suit individual requirements. When calculating the length of your pole, remember to allow tolerance beyond the width of the frame for the curtains to stack back to the edge of the window.

Maximum Coverpole length in one piece 2.9m (114")*. Poles exceeding the maximum length will be cut into equal parts unless otherwise specified. A joining bracket will need to be specified.

Size	Maximum distance between brackets	Minimum bend radius
Round ø30mm (1 3/16") Rotary/Electric - Silent Gliss	1500mm (60")	R275mm (10 13/16")
Round ø38mm (1 1/2") Rotary/Electric - Silent Gliss	1500mm (60")	R275mm (10 13/16")
Round ø50mm (2") Rotary/Electric - Silent Gliss	1500mm (60")	R400mm (15 3/4")
Flat H45mm (1 3/4") Rotary/Electric - Silent Gliss	1500mm (60")	Mitered option only*
Round ø38mm (1 1/2") Electric Lutron	1500mm (60")	R278mm (10 15/16")
Round ø50mm (2") Electric Lutron	1500mm (60")	R400mm (15 3/4")
Flat H45mm (1 3/4") Electric Lutron	1500mm (60")	Mitered option only*

*Section Lengths over 2.4m (96") will incur a handling charge

*Mitered option requires two independent tracks