

web www.bradleycollection.com Email info@bradleycollection.com













World

The Bradley Collection Ltd • Lion Barn • Maitland Road • Needham Market • Suffolk • IP6 8NS • UK

Telephone +44 (0)1449 722 724 Fax +44 (0)1449 722 728

USA & Canada

The Bradley Collection Inc. • 3625 Hayden Avenue, #E • Culver City • CA • 90232 • USA

Telephone +1 (310) 815 8255 Fax +1 (310) 815 9255

Specialised fixings for mounting brackets will be required in certain situations and are not provided as standard.

Steel items are not recommended for damp conditions such as shower rooms. • Crystal finials should not be positioned in direct sunlight.

The Bradley Collection reserves the right to modify design and materials without prior notice as part of a process of continual product improvement.

Products are protected by Design Rights, under provisions of Copyright, Designs & Patents Act 1988

Bradley®, The Bradley Collection® and 🕖 Logo are registered Community trademarks of The Bradley Collection Ltd. in Europe and registered trademarks of the Bradley Collection, Inc. in the USA

Printed 0817 • Copyright © The Bradley Collection Ltd. 2017

thebradleycollection

ELYSIAN



ELYSIAN

Elysian bridges the gap between two very different aesthetics, combining pared down modernist style with decorative sensibility.

Offered in an inspirational palette of solid and metallic finishes, Elysian is designed to perform in residential, hospitality and contract settings. the collection steps beyond functionality and elevates the traditional drapery system into a high-end design statement.

 103



SPIRIT OF ELEGANCE

Elysian elevates curtain hardware from the mundane to a high-end design statement.



IN DETAIL

Pole diameters - Ø30mm (1 3/16") • 50mm (2")

Unlimited system length
Easy install, drop-in brackets with magnetic cover plate
Lined rings
Passing system
Bespoke bending service



Custom bending



Bracket design



Ombre



Transitional styling



Draw rod



FINISHES

An unparalleled selection of coated and plated finishes, allows Elysian to express emotions ranging from the sober and understated to the glamorous and flamboyant.

Coat options Matte (M) • Satin (s) • Gloss (G)





Parchment (M-S-G)



Clay (M-S-G)




Cocoa (M-S-G)



Flint (M-S-G)

M Matte finishes have a maximum pole length of 2.4m (94")



Polished Nickel+®



Platinum (s-G)



Champagne (S-G)



Gold (S-G)



Cognac (s-G)



Gunmetal (S-G)

+ A finishing charge will apply (9) Longer lead-times will apply

Due to printing limitations colours in this brochure may not be accurate Samples are available on request - www.bradleycollection.com/samples/



FINIALS

Traditional styling cues have been streamlined to suit modern living, resulting in the distinctive curvilinear character of elysian.



Halo

ø30mm (1³/16") Inclusive Length 5mm (³/16") ø50mm (2") Inclusive Length 2mm (1/16")



Globe

ø30mm (1³/₁₆") Inclusive Length 73mm (2⁷/₈") ø50mm (2") Inclusive Length 114mm (41/2")



ø30mm (1³/16") Inclusive Length 79mm (3¹/8") ø50mm (2") Inclusive Length 119mm (411/16")



ø30mm (1³/16") Inclusive Length 69mm (2¹¹/16") ø50mm (2") Inclusive Length 117mm (45/8")



Crystal Globe°

ø30mm (1³/₁₆") Inclusive Length 73mm (2⁷/₈") ø50mm (2") Inclusive Length 114mm (41/2")



Crystal Templar^o

ø30mm (1³/₁₆") Inclusive Length 79mm (3¹/₈") ø50mm (2") Inclusive Length 119mm (411/16")

© Crystal finials should not be positioned in direct sunlight

For full technical information, sizes and weights please download the specification guide - www.bradleycollection.com/specification-guides/

BRACKETS

Single Brackets

Side



Diameter ø30mm (1³/16") ø50mm (2")

Projection from wall to pole centre 100mm (4") 100mm (4")

Fixing plate size

w40mm (1°/16") x **H**86mm (33/8") **w**50mm (2") x **H**105mm (4¹/₈")



Diameter ø30mm (1³/16") ø50mm (2")

Projection from wall to pole centre 100mm (4") 100mm (4")

Fixing plate size

w86mm (3³/₈") x **H**40mm (1⁹/₁₆") **w**105mm $(4^{1}/8'')$ x **H**50mm (2'')

Passing



Diameter ø30mm (1³/16") ø50mm (2")

Projection from wall to pole centre

100mm (4") 100mm (4")

Depth off wall

Fixing plate size

w86mm (3³/₈") x **H**40mm (1⁹/₁₆") **w**105mm $(4^{1}/8")$ x **H**50mm (2")

Recess with ring stop



Diameter ø50mm (2")

ø40mm (1⁹/16") ø64mm (21/2")

Fixing plate size

Ceiling Brackets

Ceiling



Diameter ø30mm (1³/16")

ø50mm (2")

Drop from ceiling to pole centre 100mm (4")

Fixing plate size

w86mm (3³/₈") x **H**40mm (1⁹/₁₆") **w**105mm $(4^{1}/8'')$ x **H**50mm (2'')

Passing



Diameter

ø30mm (1³/16") ø50mm (2")

Drop from ceiling to pole centre

100mm (4") 100mm (4")

100mm (4")

Fixing plate size

w86mm (3³/₈") x **u**40mm (1⁹/₁₆") **w**105mm (4¹/₈") x **H**50mm (2")

Double Brackets

Side



Diameter

Fø50mm (2") Bø30mm (13/16")

Projection from wall to pole centre

F200mm (8") **B**60mm (2³/₈")

Fixing plate size

w50mm (2") x **H**105mm (4¹/₈")



Diameter

Fø50mm (2") Bø30mm (1³/16")

Projection from wall to pole centre F200mm (8") B60mm (23/8")

Fixing plate size

w105mm ($4^{1}/_{8}$ ") x $\mu50$ mm (2")

Passing



Diameter

Fø50mm (2") Bø30mm (1³/₁₆")

Projection from wall to pole centre

F200mm (8") B60mm (23/8")

Fixing plate size

w105mm ($4^{1}/8''$) x **H**73mm ($2^{7}/8''$)

Adjustable Brackets

Side



Diameter

ø30mm (13/16") ø50mm (2")

Projection from wall to pole centre

Min. 100mm (4") Max. 170mm (611/16") Min. 100mm (4") Max. 170mm $(6^{11}/_{16}")$ Fixing plate size

w40mm (1°/₁₆") x **H**86mm (3³/₈") **w**50mm (2") x **H**105mm (4¹/₈")

Mid



Diameter

ø30mm (1³/₁₆") ø50mm (2")

Projection from wall to pole centre

Min. 100mm (4") Max. 170mm ($6^{11}/_{16}$ ") Min. 100mm (4") Max. 170mm (611/16") Fixing plate size

Fixing plate size

w86mm (3³/₈") x **H**40mm (1⁹/₁₆") **w**105mm $(4^{1}/8")$ x **H**50mm (2")

Passing



Diameter

ø30mm (1³/₁₆") ø50mm (2")

Projection from wall to pole centre

Min. 100mm (4") Max. 170mm (611/16") Min. 100mm (4") Max. 170mm ($6^{11}/_{16}$ ") **w**86mm (3³/₆") x **H**40mm (1⁹/₁₆")

w105mm $(4^{1}/8")$ x **H**50mm (2")

For full technical information, sizes and weights please download the specification guide - www.bradleycollection.com/specification-guides/

RINGS, POLES & ACCESSORIES

Lined Rings

Ring

Q

Diameter

ø30mm (1³/16") ø50mm (2") Ring drop from top of pole to bottom of ringlet

51mm (2") 80mm (31/8")

Passing Ring



Diameter

ø30mm (1³/16") ø50mm (2") Ring drop from top of pole to bottom of ringlet

51mm (2") 80mm (3¹/₈")

Poles

Poles are cut, bent and curved to suit individual requirements.

When calculating the length of your pole, remember to allow tol

When calculating the length of your pole, remember to allow tolerance beyond the width of the frame for the curtains to draw back to the edge of the window.

Maximum pole length in one piece 4.0m (157")*.

Poles exceeding the recommended maximum distance between brackets, will be cut into equal parts unless otherwise specified. Pole joiners will be supplied.



Diameter

distance between brackets ### 2100mm (83") ### 2400mm (96") Recommended curtain type for pole diameter

Medium weight, lined & interlined curtains Heavy weight interlined curtains Minimum bend radius R1 20mm (4³/₄") R200mm (8")

Ombres



Internal projection from wall: 150mm (7⁷/_e")

Fixing plate size: ø68mm (2¹¹/_{1e}")

Hold back



Internal measurement: 137mm ($5^3/\epsilon''$) Fixing plate size: \emptyset 44mm ($1^3/\epsilon''$)


Tie Back Hook



Projection: 29mm (1 $^{1}/_{6}$ ")

Fixing plate size: w25mm (1") x H74mm (2 $^{15}/_{16}$ ")

Draw Rods

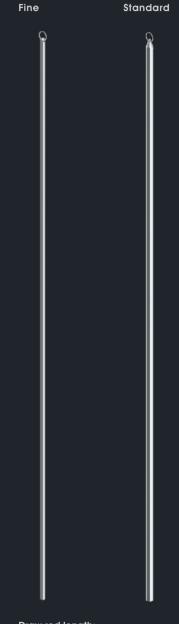

Draw rod length: 1000mm (39³/ɛ")

Custom lengths available to order

Recommended maximum