

web www.bradleycollection.com Email info@bradleycollection.com



World

The Bradley Collection Ltd • Lion Barn • Maitland Road • Needham Market • Suffolk • IP6 8NS • UK Telephone +44 (0)1449 722 724 Fax +44 (0)1449 722 728

USA & Canada

The Bradley Collection Inc. • 3625 Hayden Avenue, #E • Culver City • CA • 90232 • USA Telephone +1 (310) 815 8255 Fax +1 (310) 815 9255

Specialised fixings for mounting brackets will be required in certain situations and are not provided as standard. Steel items are not recommended for damp conditions such as shower rooms. • Crystal finials should not be positioned in direct sunlight.

The Bradley Collection reserves the right to modify design and materials without prior notice as part of a process of continual product improvement.

Products are protected by Design Rights, under provisions of Copyright, Designs & Patents Act 1988.

Bradley®, The Bradley Collection® and 🕖 Logo are registered Community trademarks of The Bradley Collection Ltd. in Europe and registered trademarks of the Bradley Collection, Inc. in the USA.

## the **bradley** collection

# EDITION FIVE



## FRENCH



## FRENCH CURVES

The elegant curving design of French lends itself to bay windows.

Pictured - *ø*25mm (1") French pole with return bends • Clay - Satin Shown with: James Hare - Simla Silk Fabric

### IN DETAIL

Classic pole diameters -  $\emptyset$ 19mm ( ${}^{3}/{}_{4}$ ") • 25mm (1") Modern pole diameters - Ø25mm (1")

Unlimited system length Choice of classic and modern bracket styles Modern offset bracket design for fitting close to ceiling Centre & passing brackets available for long runs Double pole option -  $\mathbf{F}\mathbf{g}$ 25mm (1") •  $\mathbf{B}\mathbf{g}$ 19mm ( $^{3}/_{4}$ ") Lined ring & passing ring Can be used for bay applications



Single bracket with classic design



Single bracket with modern offset design option



Double pole option



Classic & lined ring styles



Mid brackets for longer lengths



Passing system



Bay applications



### Coat options Matte (M) • Satin (s) • Gloss (G)



Alabaster (M-S-G)

Dusk (M-S-G)

Platinum (s-g)





Champagne (S-G)

Polished

Brass Toned



Oil Rubbed

Polished Nickel+®

Due to printing limitations colours in this brochure may not be accurate samples are available on request - www.bradleycollection.com/samples/

Supplied in sections - Maximum section per length 4.0m (157") Lengths over 2.4m (94") will incur a handling charge

For minimum projections, technical information, sizes and weights please download the specification guide www.bradleycollection.com/specification-guides/



Bone (M-S-G)



Millstone (M-S-G)



Granite (M-S-G)



Cream (M-S-G)



Clay (M-S-G)



Slate (M-S-G)



Parchment (M-S-G)



Cocoa (M-S-G)



Flint (M-S-G)





Gold (S-G)



Cognac (S-G)



Gunmetal (s-g)



Polished Copper Tint



Waxed



Bronzed



### BRACKETS

. .

### RINGS, POLES & ACCESSORIES

Single B	rackets				
Classic French	Modern French	<b>Diameter</b> ø19mm (³/₄″) ø25mm (1″)	<b>Projection from wall to pole centre</b> 140mm (5 <sup>1</sup> /2") 140mm (5 <sup>1</sup> /2")	Classic fixing plate size w30mm (1³/ı₅") x н80mm (3¹/₅") w30mm (1³/ı₅") x н80mm (3¹/₅")	<b>Modern fixing plate size</b> n/a w26mm (1") х н80mm (3½")
	ſ				
Classic Mid	Modern Mid	Diameter	Projection from wall to pole centre	Classic fixing plate size	Modern fixing plate size
	ØTAW	ø19mm (³/₄") ø25mm (1")	140mm (5 <sup>1</sup> /2") 140mm (5 <sup>1</sup> /2")	w55mm (2³/,ь") x н20mm (1³/,ь") w60mm (2³/,в") x н25mm (1")	n/a w85mm (3³/₅″) x #33mm (1⁵/ı₅″)
Classic Passing	Modern Passing	Diameter	Projection from wall to pole centre	Classic fixing plate size	Modern fixing plate size
		ø19mm (³/₄") ø25mm (1")	140mm (5 <sup>1</sup> /2") 140mm (5 <sup>1</sup> /2")	w55mm (2³/ь") x н20mm (1³/ь") w60mm (2³/ь") x н25mm (1")	n/a w85mm (3³/s") x #33mm (1⁵/ıs")
Double	Brackets				
Modern Fre	nch	Diameter	Projection from wall to pole centre	Fixing plate size	
		Fø25mm (1") Bø19mm (³/4")	ғ160mm (б⁵/ı₀") в60mm (2³/₀")	w63mm (2¹/₂") x н138mm (5²/ı₀")	
Modern Mic	k	Diameter	Projection from wall to pole centre	Fixing plate size	
	)	<b>fø</b> 25mm (1") ₿ø19mm (³/₄")	F160mm (6⁵/₁₀") B60mm (2³/₀")	w85mm (3³/₅″) x µ33mm (1⁵/₁₅″)	
Modern Pas	sing	Diameter	Projection from wall to pole centre	Fixing plate size	
		ғø25mm (1") вø19mm (³/₄")	₣160mm (6⁵/ı₀″) в60mm (2³/₅″)	w85mm (3³/₅″) х н33mm (1⁵/℩₅‴)	



Poles

Poles are cut, bent and curved to suit individual requirements. When calculating the length of your pole, remember to allow tolerance beyond the width of the frame for the curtains to draw back to the edge of the window.

Maximum pole length in one piece 4.0m (157")\*. Poles exceeding the recommended maximum distance between brackets, will be cut into equal parts unless otherwise specified. Pole joiners will be supplied.

Diameter	Recommended maximum distance between brackets
ø19mm (³/₄")	1800mm (71")
ø25mm (1")	2000mm (79")


### Accessories

Draw Rods • Ombres • Hold Backs • Tieback Hooks can be specified from the Steel and Simple Collections on request.

, op fro	om top	of pole	to bo	ttom o	f ringlet
(1³/16")					
(115/16")					

Lined ring drop from top of pole to bottom of ringlet 46mm (1<sup>3</sup>/16") 51mm (2)

ic	Lined
Irop from top of pole to bottom of ringlet	ring drop from top of pole to bottom of ringlet
n (1 <sup>15</sup> / <sub>16</sub> ")	46mm (1³/1₀″)
n (2 <sup>1</sup> / <sub>8</sub> ")	51mm (2)

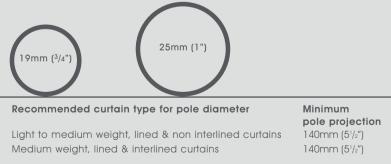

Minimum bend radius **r**75mm (3") **₽**100mm (4")