



Web www.bradleycollection.com

Email info@bradleycollection.com

Follow us on



World

The Bradley Collection Ltd • Lion Barn • Maitland Road • Needham Market • Suffolk • IP6 8NS • UK

Telephone +44 (0)1449 722 724 Fax +44 (0)1449 722 728

USA & Canada

The Bradley Collection Inc. • 3625 Hayden Avenue, #E • Culver City • CA • 90232 • USA

Telephone +1 (310) 815 8255 Fax +1 (310) 815 9255

Specialised fixings for mounting brackets will be required in certain situations and are not provided as standard.
Steel items are not recommended for damp conditions such as shower rooms. • Crystal finials should not be positioned in direct sunlight.

The Bradley Collection reserves the right to modify design and materials without prior notice as part of a process of continual product improvement.

Products are protected by Design Rights, under provisions of Copyright, Designs & Patents Act 1988.

Bradley®, The Bradley Collection® and  Logo are registered Community trademarks of The Bradley Collection Ltd. in Europe and registered trademarks of the Bradley Collection, Inc. in the USA.

the**bradley**collection

EDITION FIVE

GLIDERPOLE®



Pictured - Round \varnothing 30mm (1 $\frac{1}{8}$ ") Gliderpole® - Corded - Wave® - Ball - Natural Silver
Shown with: Ada & Ina - Vilgot Fabric

GLIDERPOLE®

This sophisticated collection has been the subject of a fundamental re-design, embracing key principles of simplicity of form, integrity in material use and exceptional functionality.

The result is a collection created entirely from aluminium, a metal used in precision engineering, with excellent sustainability credentials and offering a distinctively modern aesthetic.

The design philosophy is exemplified by the sharp new bracket and superbly profiled finial designs, while a commitment to perfection is clearly revealed by the newly developed natural silver finish.



Pictured - Round Ø30mm (1 1/8") Gliderpole® - Hand Drawn - Wave® - Flush Stud - Granite - Matte
Shown with: Ada & Ina - Vilgot Fabric



IN DETAIL

Hand drawn Flat pole dimension - H36mm (1 7/16")
 Round pole diameters - Ø30mm (1 1/8") • 50mm (2")

Corded Round pole diameters - Ø30mm (1 1/8") • 50mm (2")

Electric Round pole diameters - Ø50mm (2")

Hand drawn, corded & electric curtain control options
 Bespoke bay service for hand drawn and corded gliderpoles
 High strength brackets for minimal fixing points
 Wall fixed brackets have magnetic bracket cover plates for concealed fixings
 Flush & adjustable length ceiling brackets
 Double gliderpole system
 Standard and Wave® gliders and rollers



Inclusive end cap



Wave® curtain option



Bay bending & continuous curves



Brackets with magnetic cover



Recess fitting option




Double brackets



Flush ceiling brackets





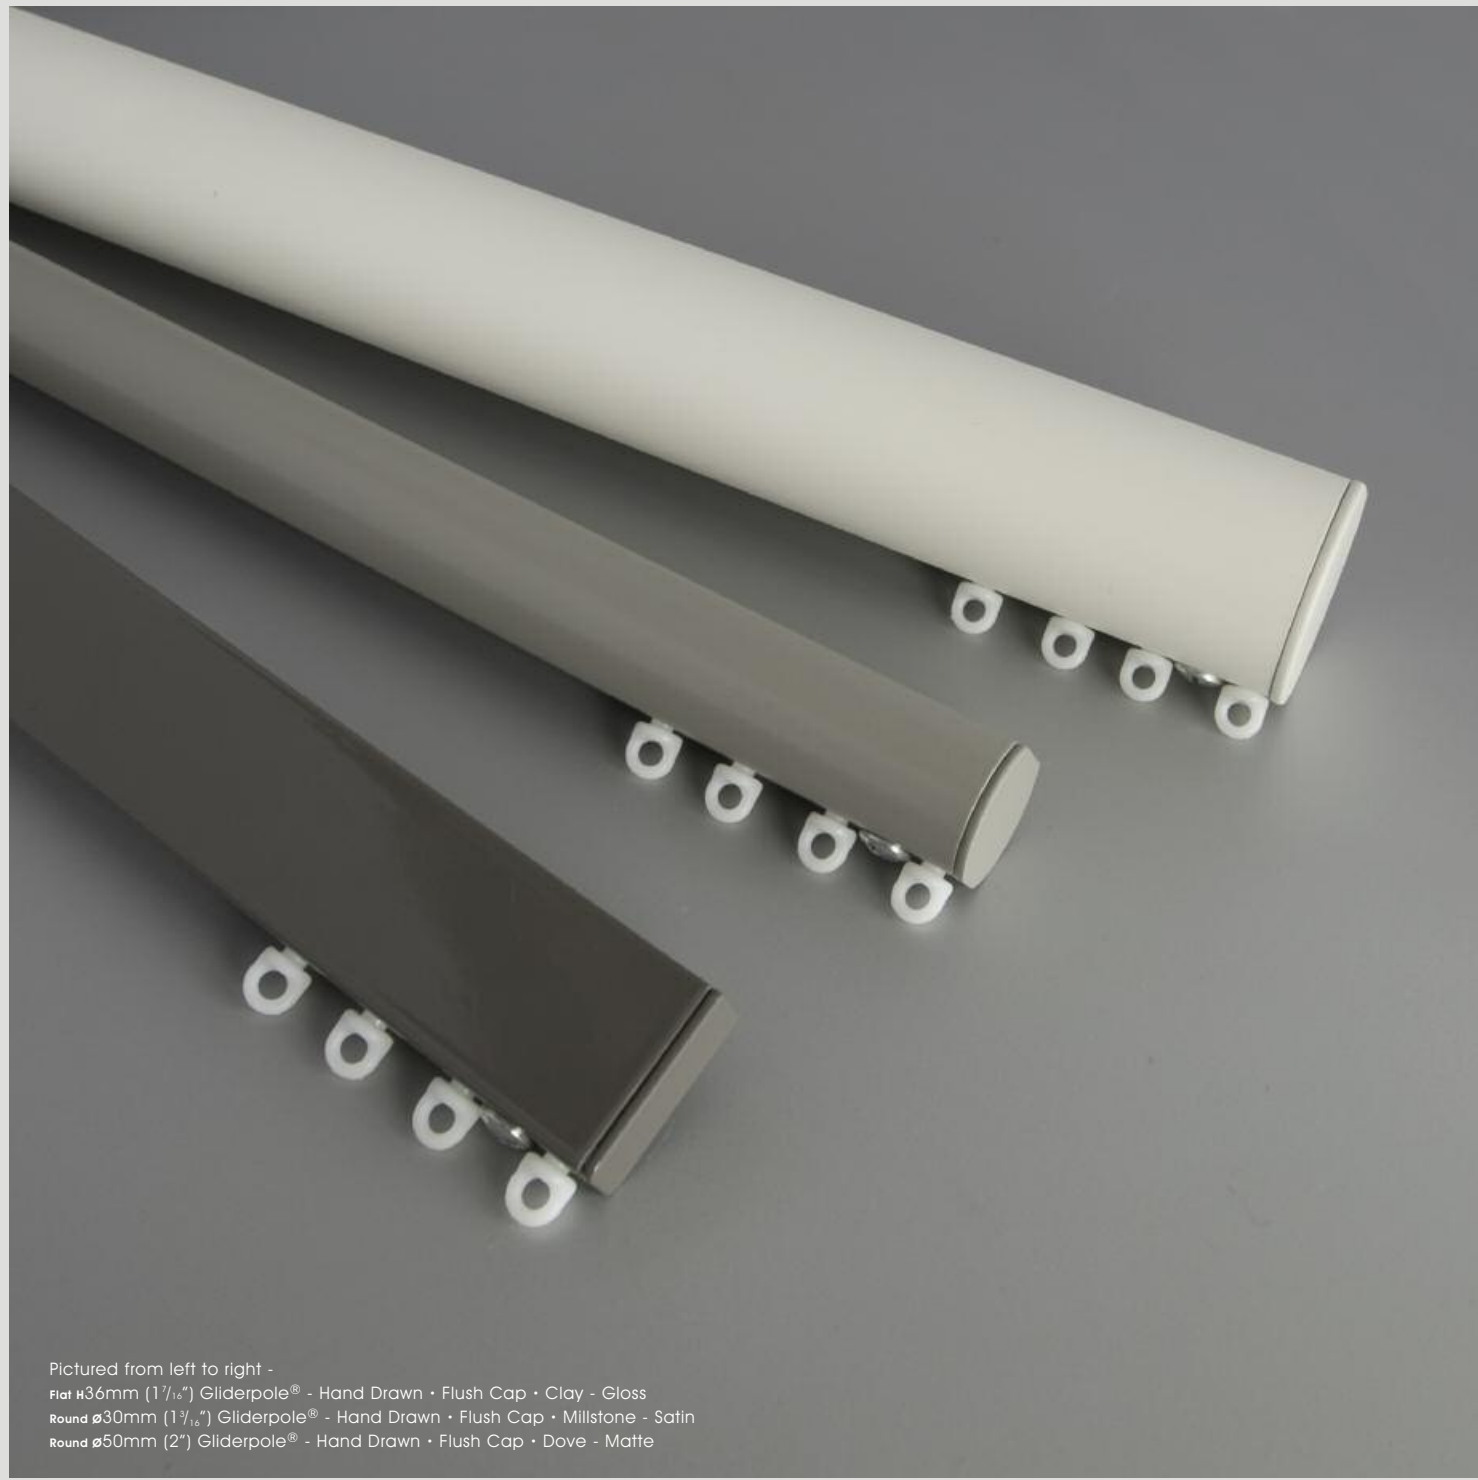



















Discreet cord retainer



Pictured from left to right -
 Flat H36mm (1 1/8") Gliderpole® - Hand Drawn • Flush Cap • Clay - Gloss
 Round ø30mm (1 1/8") Gliderpole® - Hand Drawn • Flush Cap • Millstone - Satin
 Round ø50mm (2") Gliderpole® - Hand Drawn • Flush Cap • Dove - Matte

FINISHES

The following finishes are available on all gliderpoles and components. Coat options Matte (M) • Satin (S) • Gloss (G)

				
Cloud (M-S-G)	Ceramic (M-S-G)	Bone (M-S-G)	Cream (M-S-G)	Parchment (M-S-G)
				
Barley (M-S-G)	Dove (M-S-G)	Millstone (M-S-G)	Clay (M-S-G)	Cocoa (M-S-G)
				
Alabaster (M-S-G)	Dusk (M-S-G)	Granite (M-S-G)	Slate (M-S-G)	Flint (M-S-G)
				
Platinum (S-G)	Champagne (S-G)	Gold (S-G)	Cognac (S-G)	Gunmetal (S-G)
				
Bronzed	Natural Silver			

Gliderpole only finishes




Components only finishes



Due to printing limitations colours in this brochure may not be accurate samples are available on request - www.bradleycollection.com/samples/

M Matte finishes have a maximum pole length of 2.4m (94")
 ^ Not available on 50mm (2") poles

+ A finishing charge will apply
 ⊕ Longer lead-times will apply

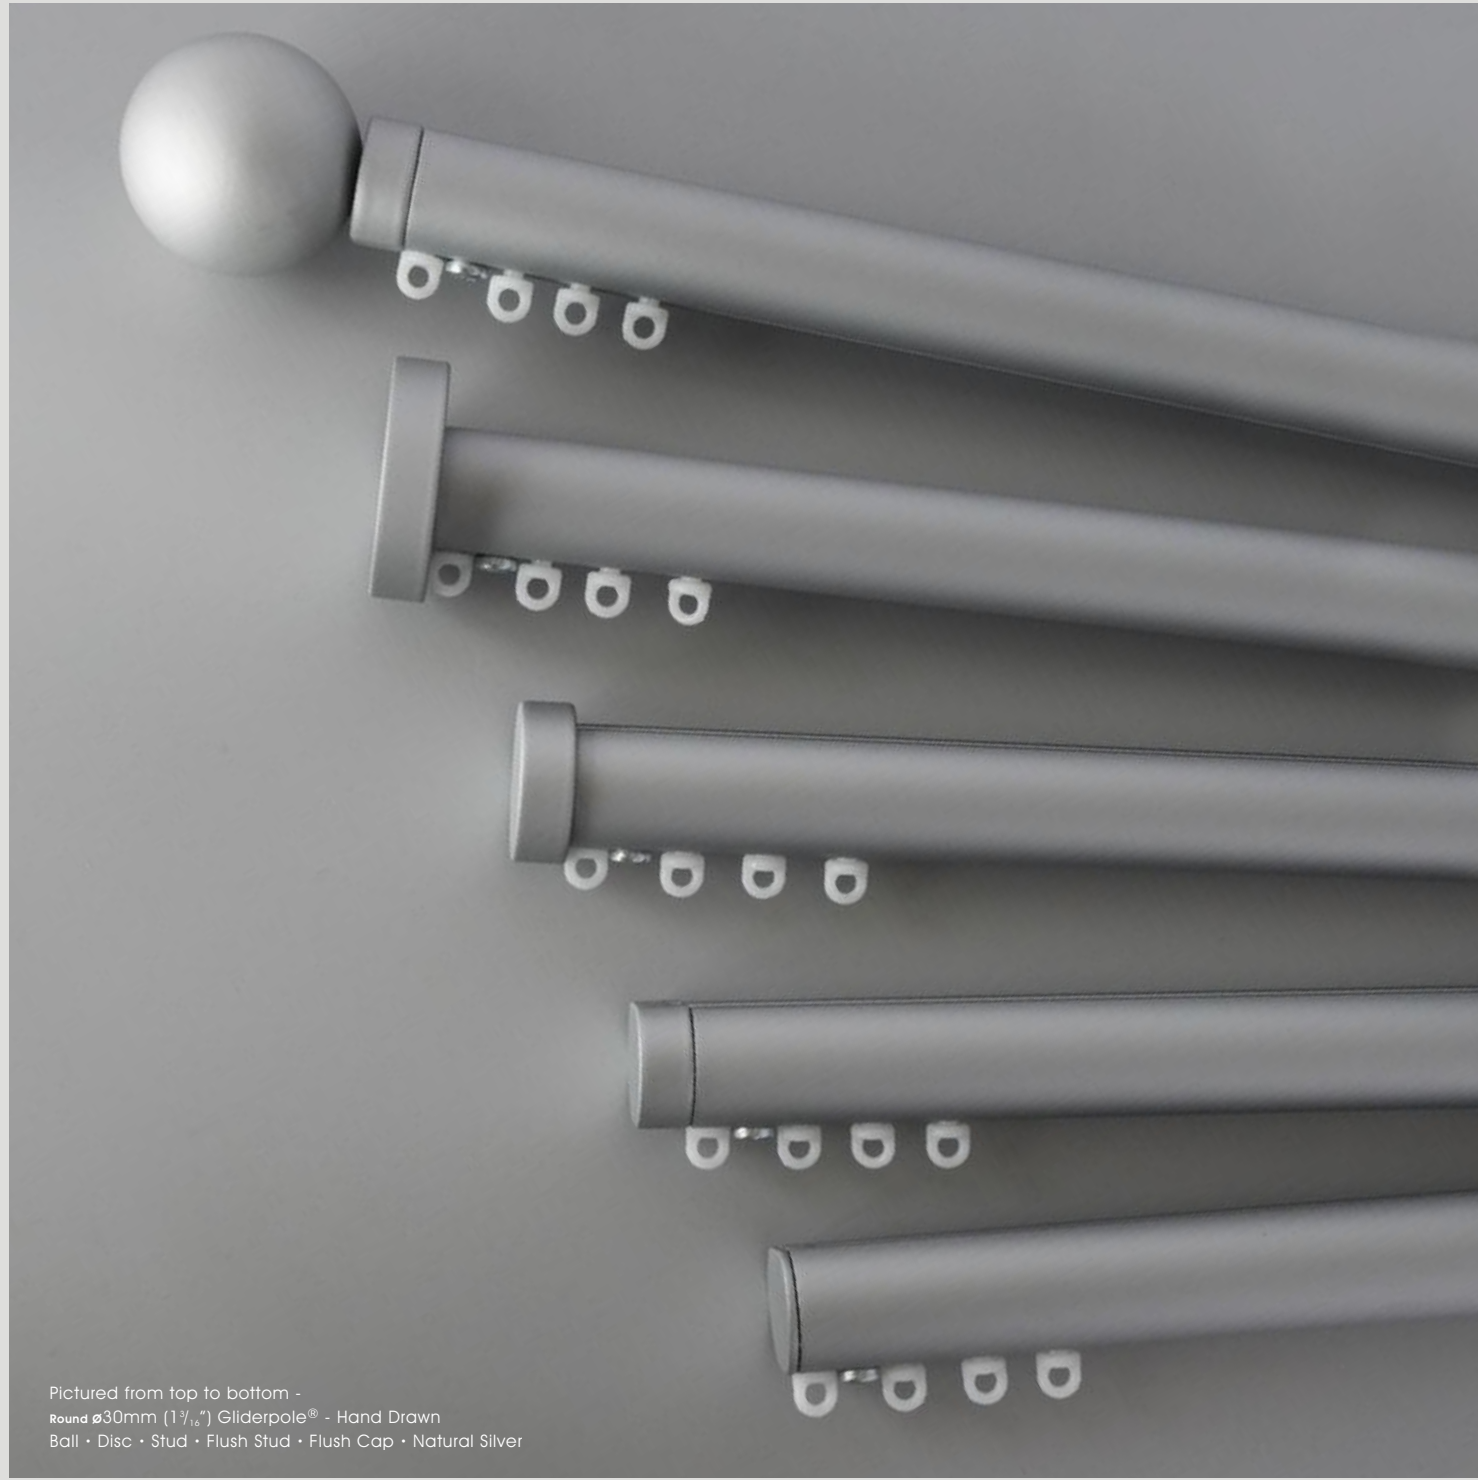

Pictured from top to bottom -
 Round \varnothing 30mm (1 3/16") Gliderpole® - Hand Drawn
 Ball • Disc • Stud • Flush Stud • Flush Cap • Natural Silver

FINIALS

This edit offers tight design integrity with minimalist intent.



End Cap - Included with system

Flat H36mm (1 7/16") Inclusive Length 3mm (3/16")
 Round \varnothing 30mm (1 3/16") Inclusive Length 3mm (3/16")
 Round \varnothing 50mm (2") Inclusive Length 3mm (3/16")



Flush Stud

Flat H36mm (1 7/16") Inclusive Length 12mm (1/2")
 Round \varnothing 30mm (1 3/16") Inclusive Length 12mm (1/2")
 Round \varnothing 50mm (2") Inclusive Length 18mm (11/16")



Disc

Round \varnothing 30mm (1 3/16") Inclusive Length 12mm (1/2")
 Round \varnothing 50mm (2") Inclusive Length 18mm (11/16")



Stud

Round \varnothing 30mm (1 3/16") Inclusive Length 12mm (1/2")
 Round \varnothing 50mm (2") Inclusive Length 18mm (11/16")



Ball

Round \varnothing 30mm (1 3/16") Inclusive Length 66mm (2 5/8")
 Round \varnothing 50mm (2") Inclusive Length 112mm (4 7/16")



Pictured from left to right -
 Round ø30mm (1 3/16") Gliderpole® - Hand Drawn
 Halo • Gunmetal - Gloss • Ball • Gold - Gloss
 Templar • Platinum - Gloss • Charm • Champagne - Gloss

FINIALS

This design group lends Gliderpole a more flamboyant, extrovert character.

Finials can also be specified from the Simple Collection.



Halo
 ø30mm (1 3/16") Inclusive Length 5mm (3/16")
 ø50mm (2") Inclusive Length 2mm (1/16")



Charm
 ø30mm (1 3/16") Inclusive Length 69mm (2 11/16")
 ø50mm (2") Inclusive Length 117mm (4 5/8")




Globe
 ø30mm (1 3/16") Inclusive Length 73mm (2 7/8")
 ø50mm (2") Inclusive Length 114mm (4 1/2")



Crystal Globe⊙
 ø30mm (1 3/16") Inclusive Length 73mm (2 7/8")
 ø50mm (2") Inclusive Length 114mm (4 1/2")



Templar
 ø30mm (1 3/16") Inclusive Length 79mm (3 1/8")
 ø50mm (2") Inclusive Length 119mm (4 11/16")

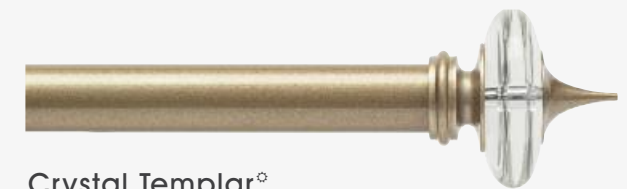

Crystal Templar⊙
 ø30mm (1 3/16") Inclusive Length 79mm (3 1/8")
 ø50mm (2") Inclusive Length 119mm (4 11/16")

⊙ Crystal finials should not be positioned in direct sunlight
 For full technical information, sizes and weights please download the specification guide - www.bradleycollection.com/specification-guides/



Pictured - Round Ø50mm (2") Gliderpole® - Hand Drawn
Stud • Dove - Satin

HAND DRAWN OPTIONS

Flat pole dimension - H36mm (1 7/16")

Round pole diameters - Ø30mm (1 1/8") • 50mm (2")

Unlimited system length ◊

Bespoke bay service

High strength brackets for minimal fixing points

Magnetic bracket cover plates for concealed fixings

Standard and Wave® gliders and rollers



Straight & Bay Windows



Wave® brake option



Hand operated using draw rod

Draw Rods



Fine

Standard

Draw rod length:

1000mm (39 3/8")

Custom lengths available to order

Gliding Options

Gliders



Drop from bottom of track:
8mm (5/16")

Rollers*



Drop from bottom of track:
6mm (3/16")

Wave® gliders



Drop from bottom of track:
6mm (3/16")

Wave® Pitch:
80mm (3 1/8")

Wave® rollers*



Drop from bottom of track:
27mm (1 1/8")

Wave® Pitch:
80mm (3 1/8")

◊ Supplied in sections - Maximum section per length 3.0m (10ft)

*supplied as standard on gliderpoles over 3.0m (10ft) with single stack curtains.


CORDED OPTIONS



Pictured - Round Ø30mm (1 1/8") Gliderpole® - Corded - Flush Stud - Dove - Satin

Round pole diameters - Ø30mm (1 1/8") • 50mm (2")

- Maximum length 6.0 Metres (20ft)[‡]
- Bespoke bay service
- High strength brackets for minimal fixing points
- Magnetic bracket cover plates for concealed fixings
- Standard and Wave® gliders and rollers
- Internal cording mechanism with cord offset behind drapes
- Concealed cord system
- Control cord available in black or white on request
- Twin cord system available for long or heavy applications



Straight & Bay Windows

Cord Retainer



Fixing plate size: ø60mm (2 3/8")

Control features & options



Internal cord mechanism with hidden cord offset behind drapes



Concealed twin cord systems for heavy applications



Optional cord retainer

Gliding Options

Gliders



Drop from bottom of track:
8mm (5/16")

Rollers*




Drop from bottom of track:
6mm (3/16")

Wave® gliders



Drop from bottom of track:
6mm (3/16")
Wave® Pitch:
80mm (3 1/8")

Wave® rollers*



Drop from bottom of track:
27mm (1 1/8")
Wave® Pitch:
80mm (3 1/8")

[‡] supplied in sections - maximum section per length 3.0m (10ft)
*supplied as standard on systems over 3.0m (10ft) with single stack curtains

Weight restrictions apply, for full technical information please refer to the specification guide.
www.bradleycollection.com/specification-guides/



Pictured - Round Ø50mm (2") Gliderpole® - Electric - Powered by Silent Gliss®
Stud · Dove - Satin

ELECTRIC OPTIONS POWERED BY SILENT GLISS®

Round pole diameters - Ø50mm (2")

- Maximum length 5 Metres (16.5ft)[‡]
- Standard rollers and Wave® gliders
- AC hidden motor
- Touch and go manual operation
- System allows manual operation during power failure
- Quiet motors, noise level at 300mm (1') <36dBA
- Integrated radio receiver
- Wireless controls
- No pre-wiring necessary



Powered by Silent Gliss®
5190 motor



Concealed motors



Functional & decorative



Full wireless control, with
wall mounted, hand held
or timer options

Gliding Options

Rollers



Drop from bottom of track:
14mm (9/16")

Wave® gliders 80mm (3 1/8") pitch



Drop from bottom of track:
20mm (13/16")
Wave® Pitch:
80mm (3 1/8")

[‡] Supplied in sections - maximum section per length 3.0m (10ft)





Weight restrictions apply, for full technical information please refer to the specification guide.
www.bradleycollection.com/specification-guides/

BRACKETS & POLES



Single Brackets

Side	Diameter	Projection from wall to gliderpole centre	Fixing plate size
	Flat H36mm (1 7/16") Round ø30mm (1 3/16") Round ø50mm (2")	60mm (2 3/8"), 100mm (4"), 140mm (5 1/2") 60mm (2 3/8"), 100mm (4"), 140mm (5 1/2") 60mm (2 3/8"), 100mm (4"), 140mm (5 1/2")	w32mm (1 1/4") x H70mm (2 3/4") w32mm (1 1/4") x H70mm (2 3/4") w32mm (1 1/4") x H70mm (2 3/4")
Mid	Diameter	Projection from wall to gliderpole centre	Fixing plate size
	Flat H36mm (1 7/16") Round ø30mm (1 3/16") Round ø50mm (2")	60mm (2 3/8"), 100mm (4"), 140mm (5 1/2") 60mm (2 3/8"), 100mm (4"), 140mm (5 1/2") 60mm (2 3/8"), 100mm (4"), 140mm (5 1/2")	w32mm (1 1/4") x H38mm (1 1/2") w32mm (1 1/4") x H38mm (1 1/2") w32mm (1 1/4") x H38mm (1 1/2")
Recess with hook stop	Diameter	Depth off wall	Fixing plate size
	Flat H36mm (1 7/16") Round ø30mm (1 3/16") Round ø50mm (2")	14mm (9/16") 14mm (9/16") 14mm (9/16")	w31mm (1 1/4") x H36mm (1 7/16") w40mm (1 9/16") x H31mm (1 1/4") w64mm (1 1/2") x H51mm (2")



Ceiling Brackets

Flush Light Duty	Diameter	Drop from ceiling to top of gliderpole	Fixing plate size
	Flat H36mm (1 7/16") Round ø30mm (1 3/16")	3mm (1/8") 3mm (1/8")	w20mm (1 3/16") x L50mm (2") w20mm (1 3/16") x L50mm (2")
Flush Heavy Duty	Diameter	Drop from ceiling to top of gliderpole	Fixing plate size
	Flat H36mm (1 7/16") Round ø30mm (1 3/16") Round ø50mm (2")	3mm (1/8") 3mm (1/8") 3mm (1/8")	w40mm (1 9/16") x H59mm (2 5/16") w40mm (1 9/16") x H59mm (2 5/16") w40mm (1 9/16") x H59mm (2 5/16")
Stand Off	Diameter	Drop from ceiling to top of gliderpole	Fixing plate size
	Flat H36mm (1 7/16") Round ø30mm (1 3/16") Round ø50mm (2")	Min.30mm (1 3/16") Max.40mm (1 9/16") Min.30mm (1 3/16") Max.40mm (1 9/16") Min.30mm (1 3/16") Max.40mm (1 9/16")	ø16mm (5/8") ø16mm (5/8") ø16mm (5/8")
Adjustable	Diameter	Drop from ceiling to top of gliderpole	Fixing plate size
	Flat H36mm (1 7/16") Round ø30mm (1 3/16") Round ø50mm (2")	Min.40mm (1 9/16") Max.200mm (8") Min.40mm (1 9/16") Max.200mm (8") Min.40mm (1 9/16") Max.200mm (8")	ø65mm (2 9/16") ø65mm (2 9/16") ø65mm (2 9/16")

Double Brackets

Side	Diameter	Projection from wall to gliderpole centre	Fixing plate size
	Flat H36mm (1 7/16") Round ø30mm (1 3/16") Round ø50mm (2")	F140mm (5 1/2") B adjustable F140mm (5 1/2") B adjustable F140mm (5 1/2") B adjustable	w32mm (1 1/4") x H70mm (2 3/4") w32mm (1 1/4") x H70mm (2 3/4") w32mm (1 1/4") x H70mm (2 3/4")
Mid	Diameter	Projection from wall to gliderpole centre	Fixing plate size
	Flat H36mm (1 7/16") Round ø30mm (1 3/16") Round ø50mm (2")	F140mm (5 1/2") B adjustable F140mm (5 1/2") B adjustable F140mm (5 1/2") B adjustable	w32mm (1 1/4") x H38mm (1 1/2") w32mm (1 1/4") x H38mm (1 1/2") w32mm (1 1/4") x H38mm (1 1/2")

Adjustable Brackets

Side	Diameter	Projection from wall to gliderpole centre	Fixing plate size
	Flat H36mm (1 7/16") Round ø30mm (1 3/16") Round ø50mm (2")	Min.80mm (3 1/8") Max.130mm (5 1/8") Min.80mm (3 1/8") Max.130mm (5 1/8") Min.80mm (3 1/8") Max.130mm (5 1/8")	w32mm (1 1/4") x H70mm (2 3/4") w32mm (1 1/4") x H70mm (2 3/4") w32mm (1 1/4") x H70mm (2 3/4")
Mid	Diameter	Projection from wall to gliderpole centre	Fixing plate size
	Flat H36mm (1 7/16") Round ø30mm (1 3/16") Round ø50mm (2")	Min.80mm (3 1/8") Max.130mm (5 1/8") Min.80mm (3 1/8") Max.130mm (5 1/8") Min.80mm (3 1/8") Max.130mm (5 1/8")	w32mm (1 1/4") x H38mm (1 1/2") w32mm (1 1/4") x H38mm (1 1/2") w32mm (1 1/4") x H38mm (1 1/2")

Poles

Poles are cut, bent and curved to suit individual requirements. When calculating the length of your pole, remember to allow tolerance beyond the width of the frame for the curtains to stack back to the edge of the window.

Maximum pole length in one piece 3.0m (118")*. Poles exceeding the maximum length will be cut into equal parts unless otherwise specified. A pole joiner will be supplied.



Size	Maximum distance between brackets	Minimum bend radius
Flat H36mm (1 7/16") Hand	1500mm (60")	R200mm (8")
Round ø30mm (1 3/16") Hand	1500mm (60")	R200mm (8")
Round ø50mm (2") Hand	1500mm (60")	R200mm (8")
Round ø30mm (1 3/16") Corded	1500mm (60")	R300mm (12")
Round ø50mm (2") Corded	1500mm (60")	R600mm (24")
Round ø50mm (2") Electric	1500mm (60")	n/a

*Lengths over 2.4m (96") will incur a handling charge