



Web www.bradleycollection.com

Email info@bradleycollection.com

Follow us on



World

The Bradley Collection Ltd • Lion Barn • Maitland Road • Needham Market • Suffolk • IP6 8NS • UK

Telephone +44 (0)1449 722 724 Fax +44 (0)1449 722 728

USA & Canada

The Bradley Collection Inc. • 3625 Hayden Avenue, #E • Culver City • CA • 90232 • USA

Telephone +1 (310) 815 8255 Fax +1 (310) 815 9255

Specialised fixings for mounting brackets will be required in certain situations and are not provided as standard.
Steel items are not recommended for damp conditions such as shower rooms. • Crystal finials should not be positioned in direct sunlight.

The Bradley Collection reserves the right to modify design and materials without prior notice as part of a process of continual product improvement.

Products are protected by Design Rights, under provisions of Copyright, Designs & Patents Act 1988.

Bradley®, The Bradley Collection® and  Logo are registered Community trademarks of The Bradley Collection Ltd. in Europe and registered trademarks of the Bradley Collection, Inc. in the USA.

the**bradley**collection

EDITION FIVE

SIMPLE



Pictured: ø25mm (1") - 19mm (3/4") Double Pole • Stud • Clay • Satin
Shown with: James Hare - Simla Silk Fabric

SIMPLE

The simple collection is well named, with it's purity and economy of line in design. The sharp, modern form which results from the design intent and machined manufacture of the collection is softened and made more homely by the application of contemporary coated finishes.



SOFTENED EDGES

The distinctive hard-edged and linear styling of the Simple collection is pleasingly softened by coated finishes tuned in to modern interiors.

Pictured: ø30mm (1³/₁₆"") Pole • Ball • Flint • Satin



Pictured: ø38mm (1½") pole • Flush Stud • Flint - Satin

IN DETAIL

Pole diameters - Ø19mm (¾") • 25mm (1") • 30mm (1⅜") • 38mm (1½") • 50mm (2")


Unlimited system length◇
 Easy install, drop-in brackets with magnetic cover plate
 Lined rings
 Passing system
 Bespoke bending and curving service




Custom bending



Ceiling brackets



Passing System



Double brackets



Drapery arm
 See page 92

◇ Supplied in sections - Maximum section per length 4.0m (157") - Lengths over 2.4m (94") will incur a handling charge


FINISHES

Simple has an unparalleled selection of subtle colour coats, which can all be specified in matte, satin or gloss finishes.

For more extrovert projects, glamorous metallic coats are featured in both satin and gloss.

Coat options Matte (M) • Satin (S) • Gloss (G)

Pictured left to right: ø25mm (1") pole • Stud • Bone - Satin • Dove - Satin
Parchment - Satin • Millstone - Satin • Clay - Satin • Cocoa - Satin • Slate - Satin
Flint - Satin

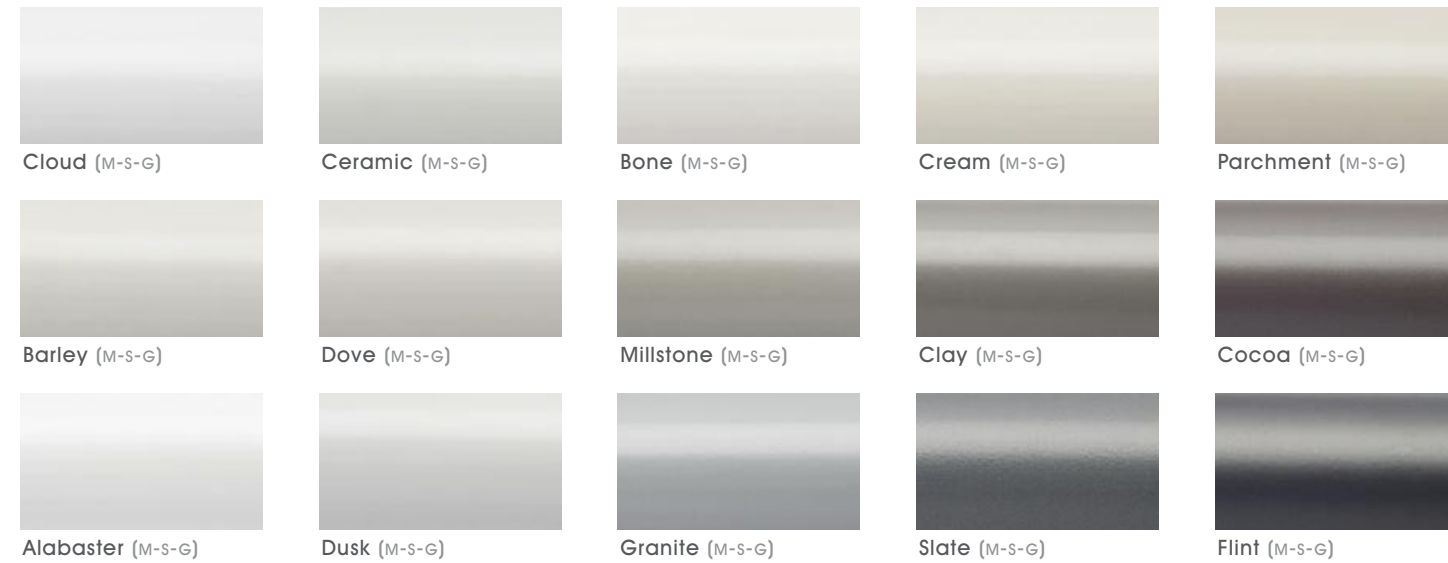

Cloud (M-S-G)

Ceramic (M-S-G)

Bone (M-S-G)

Cream (M-S-G)

Parchment (M-S-G)

Barley (M-S-G)

Dove (M-S-G)

Millstone (M-S-G)

Clay (M-S-G)

Cocoa (M-S-G)


Alabaster (M-S-G)

Dusk (M-S-G)

Granite (M-S-G)

Slate (M-S-G)

Flint (M-S-G)

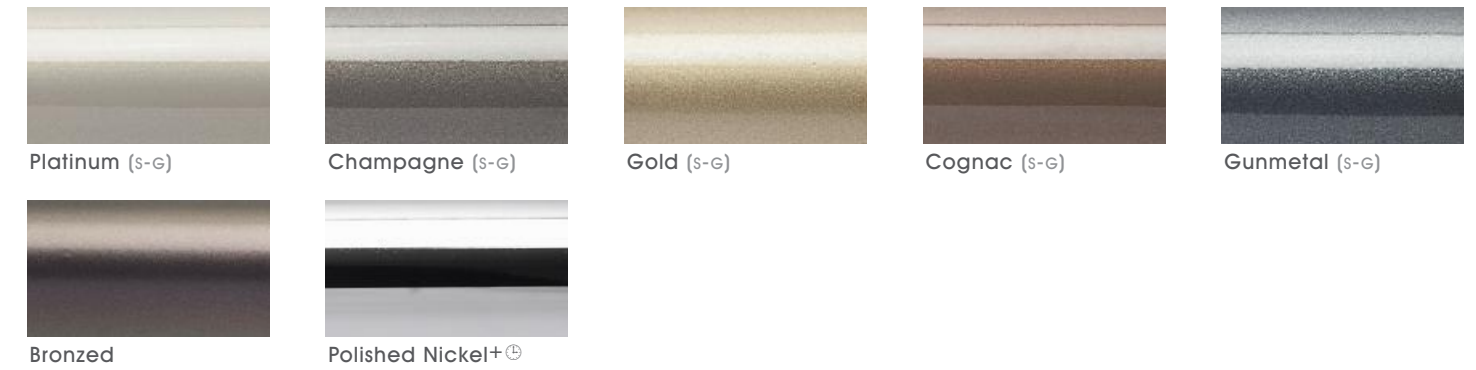

Platinum (S-G)

Champagne (S-G)

Gold (S-G)

Cognac (S-G)

Gunmetal (S-G)

Bronzed

Polished Nickel+Ⓢ

Due to printing limitations colours in this brochure may not be accurate
Samples are available on request - www.bradleycollection.com/samples/

M Matte finishes have a maximum pole length of 2.4m (94")

+ A finishing charge will apply

Ⓢ Longer lead-times will apply

FINIALS

Sharp, modern design softened by the use of contemporary coated finishes.

Pictured left to right: ø50mm (2") • Element • Flint - Satin • Stud • Cocoa - Satin
Crystal Ball • Clay - Satin • Large Disc • Granite - Matte • Ball • Cream - Matte
Cut Crystal Ball • Parchment - Satin • Disc • Bone - Satin Flush Stud • Barley - Matte



Stud

ø19mm (¾") Inclusive Length 2mm (⅛")
ø25mm (1") Inclusive Length 3mm (⅜")
ø30mm (1⅓") Inclusive Length 3mm (⅜")
ø38mm (1½") Inclusive Length 3mm (⅜")
ø50mm (2") Inclusive Length 4mm (⅜")



Flush Stud

ø19mm (¾") Inclusive Length 6mm (¼")
ø25mm (1") Inclusive Length 6mm (¼")
ø30mm (1⅓") Inclusive Length 6mm (¼")
ø38mm (1½") Inclusive Length 8mm (⅝")
ø50mm (2") Inclusive Length 8mm (⅝")



Disc

ø19mm (¾") Inclusive Length 2mm (⅛")
ø25mm (1") Inclusive Length 3mm (⅜")
ø30mm (1⅓") Inclusive Length 3mm (⅜")
ø38mm (1½") Inclusive Length 3mm (⅜")
ø50mm (2") Inclusive Length 4mm (⅜")



Large Disc

ø19mm (¾") Inclusive Length 4mm (⅜")
ø25mm (1") Inclusive Length 4mm (⅜")
ø30mm (1⅓") Inclusive Length 4mm (⅜")
ø38mm (1½") Inclusive Length 6mm (½")
ø50mm (2") Inclusive Length 6mm (½")



Ball

ø19mm (¾") Inclusive Length 50mm (2")
ø25mm (1") Inclusive Length 63mm (2½")
ø30mm (1⅓") Inclusive Length 62mm (2⅝")
ø38mm (1½") Inclusive Length 83mm (3¼")
ø50mm (2") Inclusive Length 104mm (4¼")



Crystal Element[⊛]

ø30mm (1⅓") Inclusive Length 87mm (3⅞")
ø50mm (2") Inclusive Length 126mm (4⅝")



Crystal Ball[⊛]

ø19mm (¾") Inclusive Length 55mm (3⅓")
ø25mm (1") Inclusive Length 66mm (2⅝")
ø30mm (1⅓") Inclusive Length 66mm (2⅝")
ø38mm (1½") Inclusive Length 85mm (3⅜")
ø50mm (2") Inclusive Length 108mm (4¼")




Cut Crystal Ball[⊛]


ø19mm (¾") Inclusive Length 55mm (3⅓")
ø25mm (1") Inclusive Length 66mm (2⅝")
ø30mm (1⅓") Inclusive Length 66mm (2⅝")
ø38mm (1½") Inclusive Length 85mm (3⅜")
ø50mm (2") Inclusive Length 108mm (4¼")


⊛ Crystal Finials should not be positioned in direct sunlight


BRACKETS

Single Brackets


Side	Diameter	Projection from wall to pole centre	Fixing plate size
	ø19mm (3/4") ø25mm (1") ø30mm (1 1/8") ø38mm (1 1/2") ø50mm (2")	60mm (2 3/8"), 100mm (4") 60mm (2 3/8"), 100mm (4") 100mm (4") 100mm (4") 100mm (4")	w34mm (1 5/16") x h70mm (3 3/4") w34mm (1 5/16") x h70mm (3 3/4") w34mm (1 5/16") x h70mm (3 3/4") w52mm (2 1/16") x h104mm (4 1/8") w52mm (2 1/16") x h104mm (4 1/8")


Mid	Diameter	Projection from wall to pole centre	Fixing plate size
	ø19mm (3/4") ø25mm (1") ø30mm (1 1/8") ø38mm (1 1/2") ø50mm (2")	60mm (2 3/8"), 100mm (4") 60mm (2 3/8"), 100mm (4") 100mm (4") 100mm (4") 100mm (4")	w70mm (3 3/4") x h34mm (1 5/16") w70mm (3 3/4") x h34mm (1 5/16") w70mm (3 3/4") x h34mm (1 5/16") w104mm (4 1/8") x h52mm (2 1/16") w104mm (4 1/8") x h52mm (2 1/16")

Passing	Diameter	Projection from wall to pole centre	Fixing plate size
	ø19mm (3/4") ø25mm (1") ø30mm (1 1/8") ø38mm (1 1/2") ø50mm (2")	60mm (2 3/8"), 100mm (4") 60mm (2 3/8"), 100mm (4") 100mm (4") 100mm (4") 100mm (4")	w70mm (3 3/4") x h34mm (1 5/16") w70mm (3 3/4") x h34mm (1 5/16") w70mm (3 3/4") x h34mm (1 5/16") w104mm (4 1/8") x h52mm (2 1/16") w104mm (4 1/8") x h52mm (2 1/16")


Recess with ring stop	Diameter	Depth off wall	Fixing plate size
	ø19mm (3/4") ø25mm (1") ø30mm (1 1/8") ø38mm (1 1/2") ø50mm (2")	7mm (1/4") 8mm (5/16") 10mm (3/8") 12mm (1/2") 15mm (9/16")	ø26mm (1") ø34mm (1 5/16") ø40mm (1 9/16") ø49mm (1 15/16") ø64mm (2 1/2")


Ceiling Brackets


Ceiling	Diameter	Drop from ceiling to pole centre	Fixing plate size
	ø19mm (3/4") ø25mm (1") ø30mm (1 1/8") ø38mm (1 1/2") ø50mm (2")	60mm (2 3/8"), 100mm (4") 60mm (2 3/8"), 100mm (4") 100mm (4") 100mm (4") 100mm (4")	w70mm (3 3/4") x h34mm (1 5/16") w70mm (3 3/4") x h34mm (1 5/16") w70mm (3 3/4") x h34mm (1 5/16") w104mm (4 1/8") x h52mm (2 1/16") w104mm (4 1/8") x h52mm (2 1/16")

Passing	Diameter	Drop from ceiling to pole centre	Fixing plate size
	ø19mm (3/4") ø25mm (1") ø30mm (1 1/8") ø38mm (1 1/2") ø50mm (2")	60mm (2 3/8"), 100mm (4") 60mm (2 3/8"), 100mm (4") 100mm (4") 100mm (4") 100mm (4")	w70mm (3 3/4") x h34mm (1 5/16") w70mm (3 3/4") x h34mm (1 5/16") w70mm (3 3/4") x h34mm (1 5/16") w104mm (4 1/8") x h52mm (2 1/16") w104mm (4 1/8") x h52mm (2 1/16")

Double Brackets


Side	Diameter	Projection from wall to pole centre	Fixing plate size
	Fø25mm (1") Bø19mm (3/4") Fø50mm (2") Bø25mm (1")	F160mm (6 5/16") B60mm (2 3/8") F200mm (8") B60mm (2 3/8")	w34mm (1 5/16") x h70mm (3 3/4") w52mm (2 1/16") x h104mm (4 1/8")

Mid	Diameter	Projection from wall to pole centre	Fixing plate size
	Fø25mm (1") Bø19mm (3/4") Fø50mm (2") Bø25mm (1")	F160mm (6 5/16") B60mm (2 3/8") F200mm (8") B60mm (2 3/8")	w70mm (3 3/4") x h34mm (1 5/16") w104mm (4 1/8") x h52mm (2 1/16")

Passing	Diameter	Projection from wall to pole centre	Fixing plate size
	Fø25mm (1") Bø19mm (3/4") Fø50mm (2") Bø25mm (1")	F160mm (6 5/16") B60mm (2 3/8") F200mm (8") B60mm (2 3/8")	w72mm (2 13/16") x h59mm (2 5/16") w52mm (2 1/16") x h104mm (4 1/8")

Adjustable Brackets

Side	Diameter	Projection from wall to pole centre	Fixing plate size
	ø19mm (3/4") ø25mm (1") ø30mm (1 1/8") ø38mm (1 1/2") ø50mm (2")	Min.60mm (2 3/8") Max.170mm (6 11/16") Min.60mm (2 3/8") Max.170mm (6 11/16") Min.100mm (4") Max.170mm (6 11/16") Min.100mm (4") Max.170mm (6 11/16") Min.100mm (4") Max.170mm (6 11/16")	w34mm (1 5/16") x h70mm (2 3/4") w34mm (1 5/16") x h70mm (2 3/4") w34mm (1 5/16") x h70mm (2 3/4") w52mm (2 1/16") x h104mm (4 1/8") w52mm (2 1/16") x h104mm (4 1/8")

Passing	Diameter	Projection from wall to pole centre	Fixing plate size
	ø19mm (3/4") ø25mm (1") ø30mm (1 1/8") ø38mm (1 1/2") ø50mm (2")	Min.60mm (2 3/8") Max.170mm (6 11/16") Min.60mm (2 3/8") Max.170mm (6 11/16") Min.100mm (4") Max.170mm (6 11/16") Min.100mm (4") Max.170mm (6 11/16") Min.100mm (4") Max.170mm (6 11/16")	w34mm (1 5/16") x h70mm (2 3/4") w34mm (1 5/16") x h70mm (2 3/4") w34mm (1 5/16") x h70mm (2 3/4") w52mm (2 1/16") x h104mm (4 1/8") w52mm (2 1/16") x h104mm (4 1/8")

Drapery Arm Drapery arms have been designed to work at dormer windows, doorways & above beds

Diameter	Fixing plate size
ø25mm (1")	w34mm (1 5/16") x h156mm (6 1/8")



RINGS, POLES & ACCESSORIES

Lined Rings

Ring



Diameter

ø19mm (¾")
 ø25mm (1")
 ø30mm (1 ⅜")
 ø38mm (1 ½")
 ø50mm (2")

Ring drop from top of pole to bottom of ringlet

46mm (1 ⅜")
 51mm (2")
 51mm (2")
 66mm (2 ⅝")
 80mm (3 ⅙")

Passing Ring



Diameter

ø19mm (¾")
 ø25mm (1")
 ø30mm (1 ⅜")
 ø38mm (1 ½")
 ø50mm (2")


Ring drop from top of pole to bottom of ringlet

46mm (1 ⅜")
 51mm (2")
 51mm (2")
 66mm (2 ⅝")
 80mm (3 ⅙")

Poles

Poles are cut, bent and curved to suit individual requirements. When calculating the length of your pole, remember to allow tolerance beyond the width of the frame for the curtains to draw back to the edge of the window.

Maximum pole length in one piece 4.0m (157")*. Poles exceeding the recommended maximum distance between brackets, will be cut into equal parts unless otherwise specified. Pole joiners will be supplied.

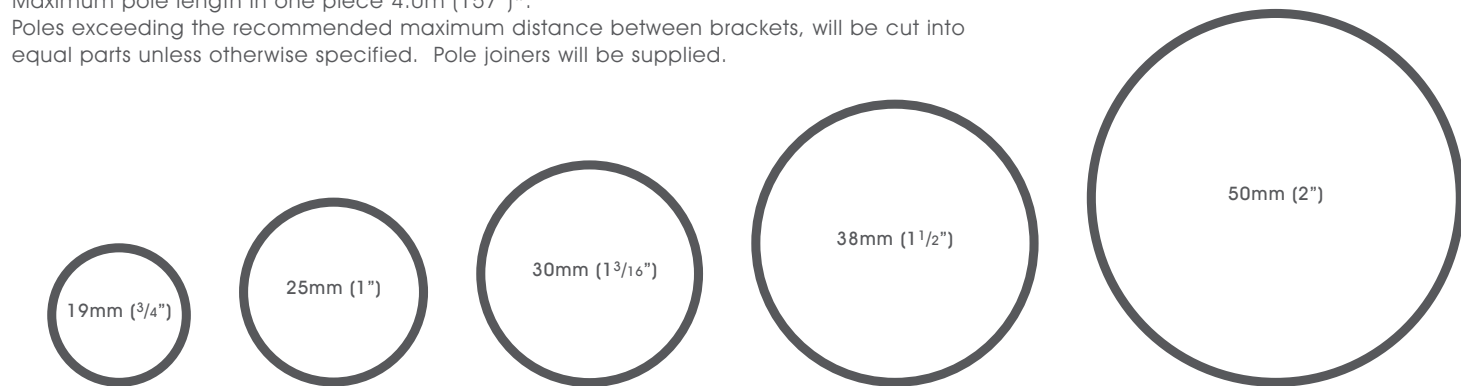

Diameter	Recommended maximum distance between brackets	Recommended curtain type for pole diameter	Minimum bend radius
ø19mm (¾")	1800mm (71")	Light to medium weight, lined & non interlined curtains	R75mm (3")
ø25mm (1")	2000mm (79")	Medium weight, lined & interlined curtains	R100mm (4")
ø30mm (1 ⅜")	2100mm (83")	Medium weight, lined & interlined curtains	R120mm (4 ¾")
ø38mm (1 ½")	2200mm (87")	Medium to heavy weight, lined & interlined curtains	R150mm (6")
ø50mm (2")	2400mm (96")	Heavy weight interlined curtains	R200mm (8")

Ombres

Small



Internal projection from wall: 150mm (5 ⅞")
Fixing plate size: ø19mm (¾")

Large



Internal projection from wall: 150mm (5 ⅞")
Fixing plate size: ø25mm (1")

Hold back



Internal measurement: 137mm (5 ⅜")
Fixing plate size: ø44mm (1 ¾")

Tie Back Hook



Projection: 29mm (1 ⅛")
Fixing plate size: w25mm (1") x h74mm (2 ⅝")

Draw Rods

Fine



Standard



Draw rod length:
 1000mm (39 ⅜")
 Custom lengths available to order