



CONTACT

Web www.bradleycollection.com

Email info@bradleycollection.com

Follow     

WORLD

The Bradley Collection Ltd

Lion Barn • Maitland Road

Needham Market • Suffolk

IP6 8NS • UK

Telephone +44 (0)1449 722 72

Fax +44 (0)1449 722 728

USA & Canada

The Bradley Collection Inc.

3625 Hayden Avenue, Suite E

Culver City • CA • 90232 • USA

Telephone 1 (310) 815 8255

Fax 1 (310) 815 9255

the **bradley** collection


EDITION SEVEN

19 | 20

Specialised fixings for mounting brackets will be required in certain situations and are not provided as standard.
Steel items are not recommended for damp conditions such as shower rooms.
Crystal finials and acrylic poles should not be positioned in direct sunlight, and are not suitable for use in conservatories.
Brass items are supplied unlacquered and will tarnish over time.

The Bradley Collection reserves the right to modify design and materials without prior notice as part of a process of continual product improvement. Due to printing limitations, colours in this brochure may not be accurate.

Products are protected by Design Rights, under provisions of Copyright, Designs & Patents Act 1988.

Bradley®, The Bradley Collection® and  Logo are registered Community trademarks of The Bradley Collection Ltd. In Europe and registered trademarks of the Bradley Collection, Inc. in the USA.

Printed 0819 • Copyright © The Bradley Collection Ltd. 2019

the**bradley**collection

EDITION SEVEN
19|20

WELCOME

I'm particularly pleased to present our new collections for 2019/20, where we have pushed the boundaries even further on colour and surface finish. Look out for some new 'statement' colours, with my particular favourite being Smoke, which looks especially stunning in our pioneering matte finish.

Also, given the success of the Eclipse Electric collection, we are delighted to include wood and brass designs for the first time and to extend the choice of motor options.

And a personal thank you to everyone who entered our Design Competition this year. Every entry was of the highest quality and we are thrilled to be featuring a number of these project images in this year's 'little black book'.



Isabella Bradley

CONTENTS

Gliderpole® 01-20
Steel 21-40
Simple 41-56
Stainless 57-70
Elysian 71-84
Eclipse 85-106

CONTACT

Web www.bradleycollection.com

Email info@bradleycollection.com

World +44 (0)1449 722 724

USA & Canada +1 (310) 815 8255

Follow     

Image supplied by: Alan Boswell Group



Picture: Round ø50mm (2") Gliderpole® - Corded - Ball - Gold - Gloss

Interior styling & decoration: Dilly Orme @dillyorme

Photography: David Parmiter @davidparmiterphotography

GLIDERPOLE®

This sophisticated collection embraces simplicity of form, authentic materials and exceptional functionality.

Sharp, streamlined, minimal, modern.



Pictured: Round 30mm (1 3/8") Gliderpole® - Hand Drawn - Charm - Gold - Gloss

Interior design: EMR Architecture - London - UK

Curtain design: Ma Maison Design - @ma_maison_design - London - UK



THE LONG VIEW

On occasions, less is more and a long window with a big view deserves understated hardware.

The unbroken line of Flat Gliderpole suits long bay windows perfectly and with the right colour selection achieves a pleasing, 'barely there' aesthetic.

Pictured: Flat H36mm (1 7/16") Gliderpole® - Hand Drawn
Flush End Cap • Bone - Satin

Curtain design: Erik Bruce • @erikbrucestudio - New York - USA



Pictured: Round Ø30mm (1 1/8") Gliderpole® - Hand Drawn - Wave® - Halo - Clay - Satin

Interior design: Furnished by Anna - @furnishedbyanna - Sevenoaks - UK

Photography: Ryan Wicks @ryanwicksphoto

IN DETAIL

- Hand drawn & corded curtain control options
- Bespoke bay service for hand drawn and corded gliderpoles
- High strength brackets for minimal fixing points
- Wall fixed brackets have magnetic cover plates for concealed fixings
- Flush & adjustable length ceiling brackets
- Double gliderpole system
- Standard and Wave® gliders and rollers



- 1 Inclusive end cap
- 2 High strength brackets with magnetic cover
- 3 Wave® curtain option
- 4 Bay bending & continuous curves
- 5 Flush ceiling brackets
- 6 Double brackets
- 7 Recess fitting option
- 8 Hand operation using draw rod
- 9 Internal cord mechanism with hidden cord
- 10 Discrete Cord Retainer
- 11 Concealed twin cord system for heavy applications

IN DETAIL

CONTROL OPTIONS

Hand Drawn

Square • Flat • Ø30mm (1 3/16") • 50mm (2")

Unlimited system length[‡]

Bespoke bay service

Standard gliders and rollers & Wave® gliders and rollers

Corded

Square • Ø30mm (1 3/16") • 50mm (2")

Maximum length 6.0 Metres (20ft)[‡]

Standard gliders and rollers & Wave® gliders and rollers

Internal cording mechanism with cord offset behind drapes

Concealed cord system

Control cord available in black or white on request

Twin cord system available for long or heavy applications

Metal cord retainer included as standard.



Hand drawn & corded curtain control options
Flat, round and new square profile designs.

Pictured Right: Square H27mm (1 1/16") Gliderpole® - Hand Drawn • Flint - Satin
Pictured Above: Round Ø30mm (1 3/16") Gliderpole® - Hand Drawn • Pebble •
Frame Grey - Satin

[‡] Supplied in sections - maximum section length 3.0m (10ft)

FINISHES

The following finishes are available on all gliderpoles and components.



Pictured left to right:
 Flat H36mm (1 7/16") Gliderpole® - Hand Drawn • Flush Cap • Clay - Matte
 Square H27mm (1 1/16") Gliderpole® - Hand Drawn • Flush Cap • Dove - Matte
 Round Ø30mm (1 1/16") Gliderpole® - Hand Drawn • Flush Cap • Millstone - Matte
 Round Ø50mm (2") Gliderpole® - Hand Drawn • Flush Cap • Bone - Matte

Coat options Matte (M) • Satin (S) • Gloss (G)

Cloud (M-S-G)	Ceramic (M-S-G)	Bone (M-S-G)	Cream (M-S-G)	Parchment (M-S-G)
Barley (M-S-G)	Dove (M-S-G)	Millstone (M-S-G)	Clay (M-S-G)	Cocoa (M-S-G)
Alabaster (M-S-G)	Dusk (M-S-G)	Granite (M-S-G)	Slate (M-S-G)	Flint (M-S-G)
Damson (M-S-G)	Moss (M-S-G)	Smoke (M-S-G)	Frame Grey (M-S-G)	Raven (M-S-G)
Platinum (S-G)	Champagne (S-G)	Gold (S-G)	Cognac (S-G)	Gunmetal (S-G)
Pewter (S-G)	Antique Brass (S-G)	Bronzed (S-G)	Natural Silver	

Finial & bracket only finishes



Polished Nickel+[Ⓞ]


Pole only finishes



Bright Aluminium[^]

Due to printing limitations colours in this brochure may not be accurate
 Samples are available on request - www.bradleycollection.com/samples/

M Matte finishes have a maximum section length of 2.4m (94")
 + A finishing charge will apply Ⓞ Longer lead-times will apply ^ Not available on Square or 50mm (2") poles

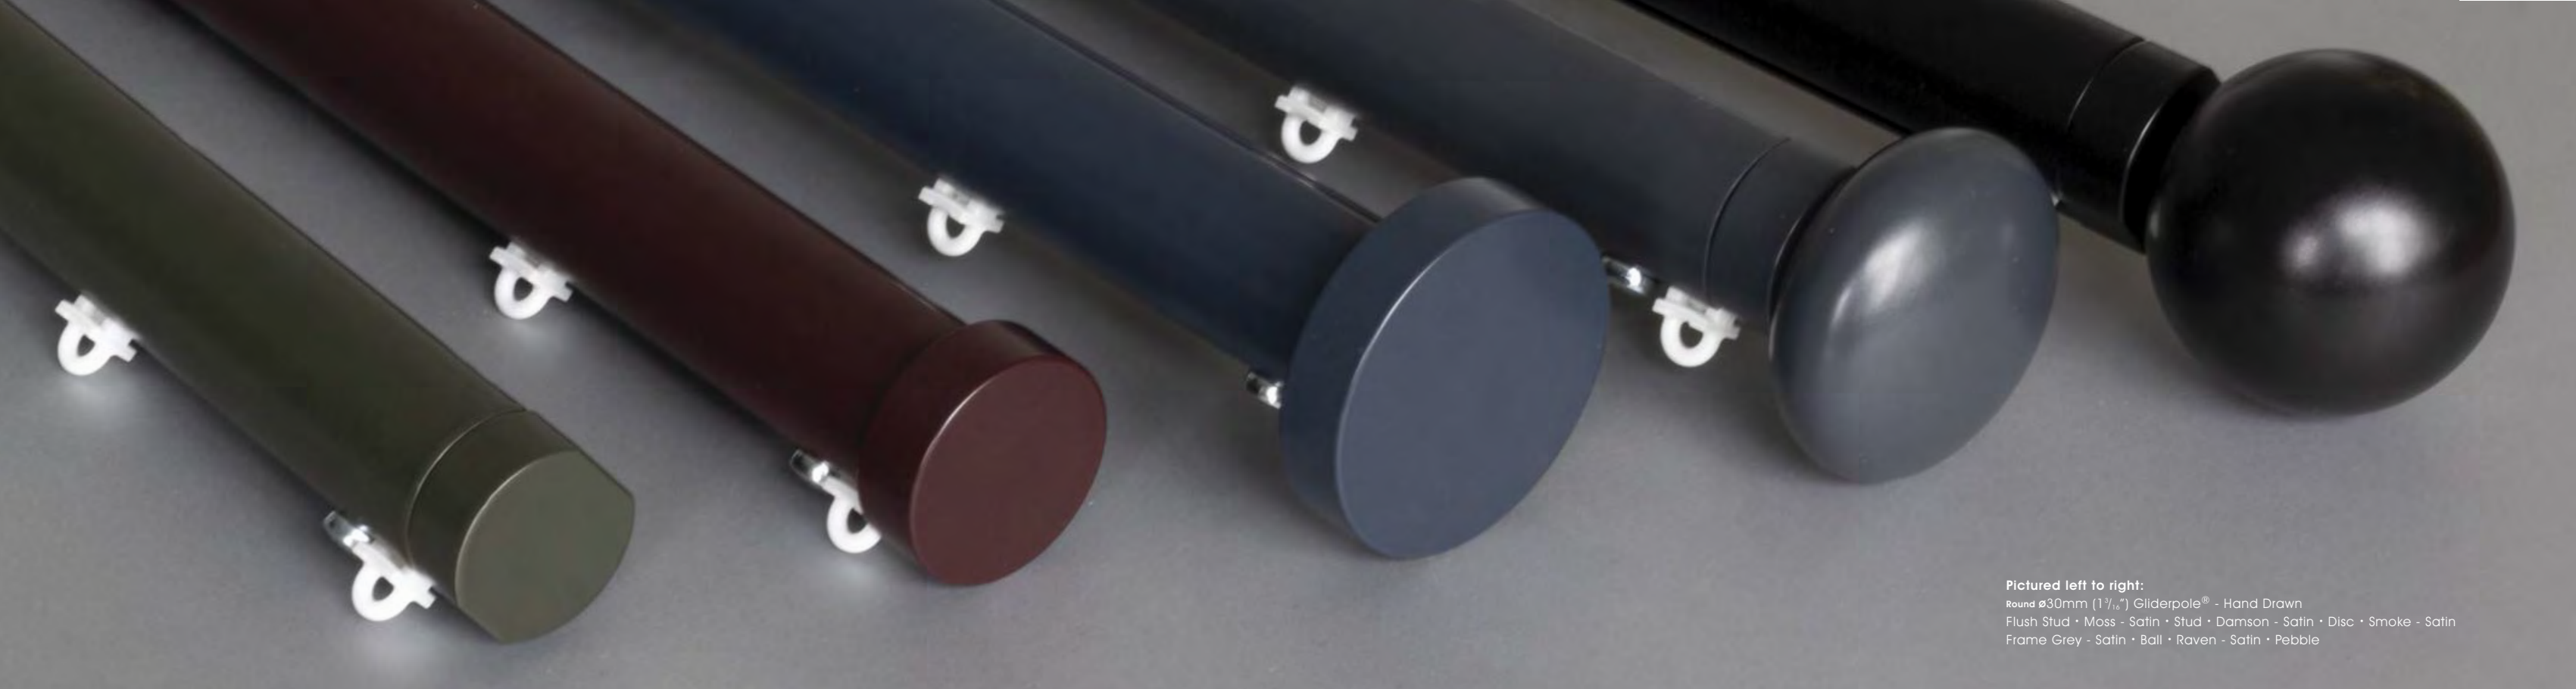

Pictured left to right:
 Round \varnothing 30mm (1 $\frac{3}{16}$ ") Gliderpole® - Hand Drawn
 Flush Stud - Moss - Satin - Stud - Damson - Satin - Disc - Smoke - Satin
 Frame Grey - Satin - Ball - Raven - Satin - Pebble

FINIALS

This edit offers tight design integrity with minimalist intent.



Flush End Cap - Supplied as standard

Square H27mm (1 $\frac{1}{16}$ ") Inclusive Length 3mm (1 $\frac{1}{8}$ ")
 Flat H36mm (1 $\frac{7}{16}$ ") Inclusive Length 3mm (1 $\frac{1}{8}$ ")
 Round \varnothing 30mm (1 $\frac{3}{16}$ ") Inclusive Length 3mm (1 $\frac{1}{8}$ ")
 Round \varnothing 50mm (2") Inclusive Length 3mm (1 $\frac{1}{8}$ ")



Flush Stud

Square H27mm (1 $\frac{1}{16}$ ") Inclusive Length 12mm (1 $\frac{1}{2}$ ")
 Flat H36mm (1 $\frac{7}{16}$ ") Inclusive Length 12mm (1 $\frac{1}{2}$ ")
 Round \varnothing 30mm (1 $\frac{3}{16}$ ") Inclusive Length 12mm (1 $\frac{1}{2}$ ")
 Round \varnothing 50mm (2") Inclusive Length 18mm (1 $\frac{1}{16}$ ")



Stud

Round \varnothing 30mm (1 $\frac{3}{16}$ ") Inclusive Length 12mm (1 $\frac{1}{2}$ ")
 Round \varnothing 50mm (2") Inclusive Length 18mm (1 $\frac{1}{16}$ ")



Disc

Round \varnothing 30mm (1 $\frac{3}{16}$ ") Inclusive Length 12mm (1 $\frac{1}{2}$ ")
 Round \varnothing 50mm (2") Inclusive Length 18mm (1 $\frac{1}{16}$ ")



Pebble

Round \varnothing 30mm (1 $\frac{3}{16}$ ") Inclusive Length 42mm (1 $\frac{5}{8}$ ")
 Round \varnothing 50mm (2") Inclusive Length 68mm (2 $\frac{11}{16}$ ")



Ball

Round \varnothing 30mm (1 $\frac{3}{16}$ ") Inclusive Length 66mm (2 $\frac{5}{8}$ ")
 Round \varnothing 50mm (2") Inclusive Length 112mm (4 $\frac{7}{16}$ ")

FINIALS

This design group lends Gliderpole a more flamboyant, extrovert character.

Finials can also be specified from the Simple Collection.



Pictured left to right:
 Round $\varnothing 50\text{mm}$ (2") Gliderpole® - Hand Drawn
 Globe • Champagne - Gloss • Templar • Bronzed - Gloss
 Squat Globe • Pewter - Gloss • Flute • Antique Brass - Gloss



Halo

$\varnothing 30\text{mm}$ (1 3/16") Inclusive Length 5mm (3/16")
 $\varnothing 50\text{mm}$ (2") Inclusive Length 2mm (1/16")



Globe

$\varnothing 30\text{mm}$ (1 3/16") Inclusive Length 73mm (2 7/8")
 $\varnothing 50\text{mm}$ (2") Inclusive Length 114mm (4 1/2")



Flute

$\varnothing 30\text{mm}$ (1 3/16") Inclusive Length 73mm (2 7/8")
 $\varnothing 50\text{mm}$ (2") Inclusive Length 114mm (4 1/2")



Templar

$\varnothing 30\text{mm}$ (1 3/16") Inclusive Length 79mm (3 1/8")
 $\varnothing 50\text{mm}$ (2") Inclusive Length 119mm (4 11/16")

⊛ Crystal Finials should not be positioned in direct sunlight



Squat Globe

$\varnothing 30\text{mm}$ (1 3/16") Inclusive Length 69mm (2 11/16")
 $\varnothing 50\text{mm}$ (2") Inclusive Length 117mm (4 5/8")




Crystal Globe[⊛]

$\varnothing 30\text{mm}$ (1 3/16") Inclusive Length 73mm (2 7/8")
 $\varnothing 50\text{mm}$ (2") Inclusive Length 114mm (4 1/2")



Charm

$\varnothing 30\text{mm}$ (1 3/16") Inclusive Length 69mm (2 11/16")
 $\varnothing 50\text{mm}$ (2") Inclusive Length 117mm (4 5/8")

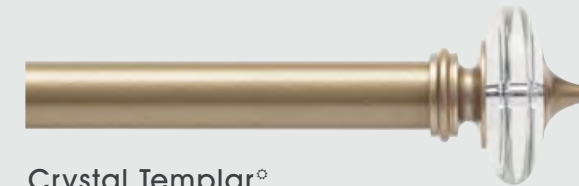

Crystal Templar[⊛]

$\varnothing 30\text{mm}$ (1 3/16") Inclusive Length 79mm (3 1/8")
 $\varnothing 50\text{mm}$ (2") Inclusive Length 119mm (4 11/16")

For full technical information, sizes and weights please download the specification guide - www.bradleycollection.com/specification-guides/

HAND DRAWN OPTIONS

Poles

Poles are cut, bent and curved to suit individual requirements. When calculating the length of your pole, remember to allow tolerance beyond the width of the frame for the curtains to stack back to the edge of the window.

Maximum pole length in one piece 3.0m (118")*. Poles exceeding the maximum length will be cut into equal parts unless otherwise specified. A pole joiner will be supplied.

Size	Maximum distance between brackets	Minimum bend radius
Square H27mm (1 ¹ / ₁₆ "	1000mm (39")	R300mm (12")
Flat H36mm (1 ⁷ / ₁₆ "	1000mm (39")	R200mm (8")
Round Ø30mm (1 ³ / ₁₆ "	1000mm (39")	R300mm (12")
Round Ø50mm (2")	1000mm (39")	R500mm (20")

*Lengths over 3.0m (118") will incur a handling charge


Draw Rods



Fine Standard

Draw rod length:
1000mm (39³/₈"")
Custom lengths available to order

Gliding Options

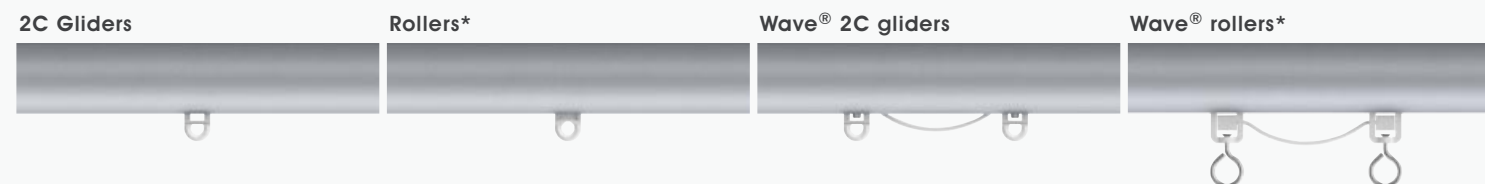

2C Gliders	Rollers*	Wave® 2C gliders	Wave® rollers*
Drop from bottom of track: 8mm (5/16")	Drop from bottom of track: 8mm (5/16")	Drop from bottom of track: 8mm (5/16") Wave® Pitch: 80mm (3 ¹ / ₈ "")	Drop from bottom of track: 27mm (1 ¹ / ₁₆ "") Wave® Pitch: 80mm (3 ¹ / ₈ "")

‡ supplied in sections - maximum section length 3.0m (10ft) *supplied as standard on systems over 3.0m (10ft) with single stack curtains
For full technical information, sizes and weights please download the specification guide - www.bradleycollection.com/specification-guides/

CORDED OPTIONS

Poles

Poles are cut, bent and curved to suit individual requirements. When calculating the length of your pole, remember to allow tolerance beyond the width of the frame for the curtains to stack back to the edge of the window.

Maximum pole length in one piece 3.0m (118")*. Poles exceeding the maximum length will be cut into equal parts unless otherwise specified. A pole joiner will be supplied.

Size	Maximum distance between brackets	Minimum bend radius
Square H27mm (1 ¹ / ₁₆ "	1000mm (39")	R300mm (12")
Round Ø30mm (1 ³ / ₁₆ "	1000mm (39")	R300mm (12")
Round Ø50mm (2")	1000mm (39")	R600mm (24")

*Lengths over 3.0m (118") will incur a handling charge

Cord Retainer




All corded tracks are supplied as standard with our metal cord retainer. This ensures that all cords are safely secured to the wall and complies with BS EN 13120:2009+A12014.

This will be supplied in the same finish as the system, unless advised otherwise.



Fixing plate size: Ø60mm (2³/₈"")

Gliding Options

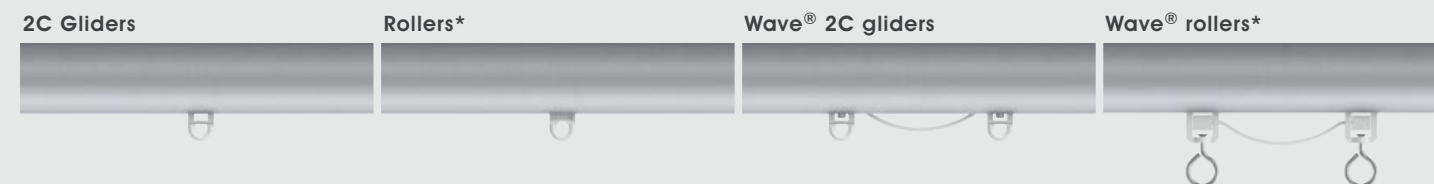




2C Gliders	Rollers*	Wave® 2C gliders	Wave® rollers*
Drop from bottom of track: 8mm (5/16")	Drop from bottom of track: 8mm (5/16")	Drop from bottom of track: 8mm (5/16") Wave® Pitch: 80mm (3 ¹ / ₈ "")	Drop from bottom of track: 27mm (1 ¹ / ₁₆ "") Wave® Pitch: 80mm (3 ¹ / ₈ "")





‡ supplied in sections - maximum section length 3.0m (10ft) *supplied as standard on systems over 3.0m (10ft) with single stack curtains
For full technical information, sizes and weights please download the specification guide - www.bradleycollection.com/specification-guides/

BRACKETS

Single Brackets



Side	Diameter	Projection from wall to gliderpole centre	Fixing plate size
	Square H27mm (1 1/16")	60mm (2 3/8"), 100mm (4")	w32mm (1 1/4") x H70mm (2 3/4")
	Flat H36mm (1 7/16")	60mm (2 3/8"), 100mm (4")	w32mm (1 1/4") x H70mm (2 3/4")
	Round ø30mm (1 3/16")	60mm (2 3/8"), 100mm (4")	w32mm (1 1/4") x H70mm (2 3/4")
	Round ø50mm (2")	60mm (2 3/8"), 100mm (4")	w32mm (1 1/4") x H70mm (2 3/4")
Mid	Diameter	Projection from wall to gliderpole centre	Fixing plate size
	Square H27mm (1 1/16")	60mm (2 3/8"), 100mm (4")	w32mm (1 1/4") x H38mm (1 1/2")
	Flat H36mm (1 7/16")	60mm (2 3/8"), 100mm (4")	w32mm (1 1/4") x H38mm (1 1/2")
	Round ø30mm (1 3/16")	60mm (2 3/8"), 100mm (4")	w32mm (1 1/4") x H38mm (1 1/2")
	Round ø50mm (2")	60mm (2 3/8"), 100mm (4")	w32mm (1 1/4") x H38mm (1 1/2")
Recess with hook stop	Diameter	Depth off wall	Fixing plate size
	Square H27mm (1 1/16")	14mm (9/16")	w31mm (1 1/4") x H36mm (1 7/16")
	Flat H36mm (1 7/16")	14mm (9/16")	w40mm (1 9/16") x H31mm (1 1/4")
	Round ø30mm (1 3/16")	14mm (9/16")	w64mm (1 1/2") x H51mm (2")
	Round ø50mm (2")	14mm (9/16")	w64mm (1 1/2") x H51mm (2")

Ceiling Brackets



Flush Light Duty	Diameter	Drop from ceiling to top of gliderpole	Fixing plate size
	Square H27mm (1 1/16")	3mm (1/8")	w20mm (13/16") x L50mm (2")
	Flat H36mm (1 7/16")	3mm (1/8")	w20mm (13/16") x L50mm (2")
	Round ø30mm (1 3/16")	3mm (1/8")	w20mm (13/16") x L50mm (2")
Flush Heavy Duty	Diameter	Drop from ceiling to top of gliderpole	Fixing plate size
	Square H27mm (1 1/16")	3mm (1/8")	w40mm (1 9/16") x L59mm (2 2/16")
	Flat H36mm (1 7/16")	3mm (1/8")	w40mm (1 9/16") x L59mm (2 2/16")
	Round ø30mm (1 3/16")	3mm (1/8")	w40mm (1 9/16") x L59mm (2 2/16")
	Round ø50mm (2")	3mm (1/8")	w40mm (1 9/16") x L59mm (2 2/16")
Stand Off	Diameter	Drop from ceiling to top of gliderpole	Fixing plate size
	Square H27mm (1 1/16")	Min.30mm (1 3/16") Max.40mm (1 9/16")	ø16mm (5/8")
	Flat H36mm (1 7/16")	Min.30mm (1 3/16") Max.40mm (1 9/16")	ø16mm (5/8")
	Round ø30mm (1 3/16")	Min.30mm (1 3/16") Max.40mm (1 9/16")	ø16mm (5/8")
	Round ø50mm (2")	Min.30mm (1 3/16") Max.40mm (1 9/16")	ø16mm (5/8")
Adjustable	Diameter	Drop from ceiling to top of gliderpole	Fixing plate size
	Square H27mm (1 1/16")	Min.58mm (2 2/8") Max.200mm (8")	ø65mm (2 5/16")
	Flat H36mm (1 7/16")	Min.58mm (2 2/8") Max.200mm (8")	ø65mm (2 5/16")
	Round ø30mm (1 3/16")	Min.58mm (2 2/8") Max.200mm (8")	ø65mm (2 5/16")
	Round ø50mm (2")	Min.58mm (2 2/8") Max.200mm (8")	ø65mm (2 5/16")



Double Brackets

Side	Diameter	Projection from wall to gliderpole centre	Fixing plate size
	Square H27mm (1 1/16")	F140mm (5 1/2") B adjustable	w32mm (1 1/4") x H70mm (2 3/4")
	Flat H36mm (1 7/16")	F140mm (5 1/2") B adjustable	w32mm (1 1/4") x H70mm (2 3/4")
	Round ø30mm (1 3/16")	F140mm (5 1/2") B adjustable	w32mm (1 1/4") x H70mm (2 3/4")
	Round ø50mm (2")	F140mm (5 1/2") B adjustable	w32mm (1 1/4") x H70mm (2 3/4")
Mid	Diameter	Projection from wall to gliderpole centre	Fixing plate size
	Square H27mm (1 1/16")	F140mm (5 1/2") B adjustable	w32mm (1 1/4") x H38mm (1 1/2")
	Flat H36mm (1 7/16")	F140mm (5 1/2") B adjustable	w32mm (1 1/4") x H38mm (1 1/2")
	Round ø30mm (1 3/16")	F140mm (5 1/2") B adjustable	w32mm (1 1/4") x H38mm (1 1/2")
	Round ø50mm (2")	F140mm (5 1/2") B adjustable	w32mm (1 1/4") x H38mm (1 1/2")

Adjustable Brackets

Side	Diameter	Projection from wall to gliderpole centre	Fixing plate size
	Square H27mm (1 1/16")	Min.80mm (3 1/8") Max.130mm (5 1/8")	w32mm (1 1/4") x H70mm (2 3/4")
	Flat H36mm (1 7/16")	Min.80mm (3 1/8") Max.130mm (5 1/8")	w32mm (1 1/4") x H70mm (2 3/4")
	Round ø30mm (1 3/16")	Min.80mm (3 1/8") Max.130mm (5 1/8")	w32mm (1 1/4") x H70mm (2 3/4")
	Round ø50mm (2")	Min.80mm (3 1/8") Max.130mm (5 1/8")	w32mm (1 1/4") x H70mm (2 3/4")
Mid	Diameter	Projection from wall to gliderpole centre	Fixing plate size
	Square H27mm (1 1/16")	Min.80mm (3 1/8") Max.130mm (5 1/8")	w32mm (1 1/4") x H38mm (1 1/2")
	Flat H36mm (1 7/16")	Min.80mm (3 1/8") Max.130mm (5 1/8")	w32mm (1 1/4") x H38mm (1 1/2")
	Round ø30mm (1 3/16")	Min.80mm (3 1/8") Max.130mm (5 1/8")	w32mm (1 1/4") x H38mm (1 1/2")
	Round ø50mm (2")	Min.80mm (3 1/8") Max.130mm (5 1/8")	w32mm (1 1/4") x H38mm (1 1/2")



Pictured: ø25mm (1") Pole · Flared Disc · Brass Toned
Interior design: Georgja Victoria - Edinburgh - UK

STEEL

A timeless classic from the Arts & Crafts tradition, this collection continues to delight.

Authentic materials crafted by artisans, with historical design cues re-imagined for contemporary living.



Pictured: ø25mm (1") Pale • Button Stud • Waxed
Interior design by: Tanya Leech - BID Interior Designer
Photography by: Anya Rice



Pictured: ø38mm (1½") Pole • Ball & Collar • Polished
 Window treatments: Bryant Furnishing - Bournemouth - UK

IN DETAIL

A picture of elegance, the Steel Collection blends innovative design with quality craftsmanship, creating a visually stunning collection.

Pole diameters - Ø19mm (¾") • 25mm (1") • 38mm (1½") • 50mm (2")

- Unlimited system length◇
- Easy install, drop in brackets with optional magnetic cover plate
- Classic rings
- Passing system
- Bespoke bay service



- 1 Single brackets with covered backplate option
- 2 Ceiling brackets
- 3 Double brackets
- 4 Drapery arm
- 5 Bay bending & continuous curves

◇ Supplied in sections - Maximum section per length 4.0m (157")
 Section lengths over 2.4m (94") will incur a handling charge

IN DETAIL

FRENCH POLES

The French pole from the Steel Collection is an iconic design favourite. A simple and sophisticated way to adorn windows, french poles follow the traditional returning curve of antique French hardware.




Picture: ø25mm (1") French pole · Flint - Satin


FINISHES

The traditional Steel finishes are joined by new natural matted finishes, which present this classic collection in a new, more contemporary light.

Pictured left to right: ø25mm (1") Pole • Hammered Ball & Collar
Polished Steel • Natural Steel • Brass Toned • Matte Brass toned
Bronzed - Satin • Waxed • Oil Rubbed • Flint - Satin



Polished Natural Steel Brass Toned Matte Brass Toned



Bronzed (Satin) Waxed Oil Rubbed Flint (Satin)

FINIALS

Simplicity is the watchword for this grouping of stud and disc designs.



Pictured left to right: ø25mm (1") • Medium Stud • Standard Stud • Large Stud • Hammered Stud • Polished



Standard Stud

- ø19mm (3/4") Inclusive Length 6mm (1/4")
- ø25mm (1") Inclusive Length 8mm (5/16")
- ø38mm (1 1/2") Inclusive Length 10mm (3/8")
- ø50mm (2") Inclusive Length 12mm (1/2")



Medium Stud

- ø19mm (3/4") Inclusive Length 6mm (1/4")
- ø25mm (1") Inclusive Length 8mm (5/16")
- ø38mm (1 1/2") Inclusive Length 10mm (3/8")
- ø50mm (2") Inclusive Length 12mm (1/2")



Large Stud

- ø19mm (3/4") Inclusive Length 6mm (1/4")
- ø25mm (1") Inclusive Length 8mm (5/16")
- ø38mm (1 1/2") Inclusive Length 10mm (3/8")
- ø50mm (2") Inclusive Length 12mm (1/2")



Hammered Stud

- ø19mm (3/4") Inclusive Length 10mm (3/8")
- ø25mm (1") Inclusive Length 12mm (1/2")
- ø38mm (1 1/2") Inclusive Length 16mm (5/8")
- ø50mm (2") Inclusive Length 20mm (13/16")



Flared Stud

- ø19mm (3/4") Inclusive Length 12mm (1/2")
- ø25mm (1") Inclusive Length 14mm (9/16")
- ø38mm (1 1/2") Inclusive Length 26mm (1")



Flared Disc

- ø19mm (3/4") Inclusive Length 17mm (11/16")
- ø25mm (1") Inclusive Length 21mm (7/8")
- ø38mm (1 1/2") Inclusive Length 34mm (1 5/16")



Button Stud

- ø19mm (3/4") Inclusive Length 26mm (1")
- ø25mm (1") Inclusive Length 40mm (1 9/16")
- ø38mm (1 1/2") Inclusive Length 59mm (2 5/16")
- ø50mm (2") Inclusive Length 69mm (2 11/16")



Pebble

- ø19mm (3/4") Inclusive Length 27mm (1 1/16")
- ø25mm (1") Inclusive Length 31mm (1 1/4")
- ø38mm (1 1/2") Inclusive Length 48mm (1 7/8")

FINIALS

Pure, simple shapes and subtle hand-forged elements define this design group.



Pictured left to right: ø25mm (1") • Ball & Collar • Hammered Ball & Collar • Ball & Claw • Brass Toned



Forged Disc

ø19mm (3/4") Inclusive Length 2mm (1/16")
 ø25mm (1") Inclusive Length 3mm (3/16")
 ø38mm (1 1/2") Inclusive Length 3mm (3/16")
 ø50mm (2") Inclusive Length 4mm (3/16")



Hammered Disc

ø19mm (3/4") Inclusive Length 2mm (1/16")
 ø25mm (1") Inclusive Length 3mm (3/16")
 ø38mm (1 1/2") Inclusive Length 3mm (3/16")
 ø50mm (2") Inclusive Length 4mm (3/16")



Ball & Collar

ø19mm (3/4") Inclusive Length 55mm (2 3/16")
 ø25mm (1") Inclusive Length 65mm (2 9/16")
 ø38mm (1 1/2") Inclusive Length 75mm (2 15/16")
 ø50mm (2") Inclusive Length 103mm (4 1/16")



Crystal Ball & Collar[⊛]

ø19mm (3/4") Inclusive Length 65mm (2 9/16")
 ø25mm (1") Inclusive Length 75mm (2 15/16")
 ø38mm (1 1/2") Inclusive Length 103mm (4 1/16")



Hammered Ball & Collar

ø19mm (3/4") Inclusive Length 55mm (2 3/16")
 ø25mm (1") Inclusive Length 65mm (2 9/16")




Ball & Claw

ø19mm (3/4") Inclusive Length 75mm (3")
 ø25mm (1") Inclusive Length 90mm (3 7/16")
 ø38mm (1 1/2") Inclusive Length 120mm (4 3/4")



Ribbed Ball & Collar

ø19mm (3/4") Inclusive Length 53mm (2 1/16")
 ø25mm (1") Inclusive Length 60mm (2 3/8")



Twisted Knot

ø19mm (3/4") Inclusive Length 90mm (3 9/16")
 ø25mm (1") Inclusive Length 95mm (3 7/16")
 ø38mm (1 1/2") Inclusive Length 150mm (5 7/8")

Please note that due to manufacturing process's size and shape may vary slightly to images above. [⊛] Crystal finials should not be positioned in direct sunlight. For full technical information, sizes and weights please download the specification guide - www.bradleycollection.com/specification-guides/

FINIALS

The true craft of the artisan is on display with these designs.

Pictured left to right: ø25mm (1") • Tusk • Hammered Spear • Curling Leaf • Jacobs Horn • Waxed



Hammered Spear

ø19mm (3/4") Inclusive Length 122mm (4 13/16")
ø25mm (1") Inclusive Length 150mm (5 7/8")




Double Ball Basket

ø19mm (3/4") Inclusive Length 142mm (5 5/16")
ø25mm (1") Inclusive Length 146mm (5 3/4")
ø38mm (1 1/2") Inclusive Length 205mm (8 1/16")



Loop

ø19mm (3/4") Inclusive Length 115mm (4 1/2")
ø25mm (1") Inclusive Length 135mm (5 3/16")
ø38mm (1 1/2") Inclusive Length 180mm (7 1/16")

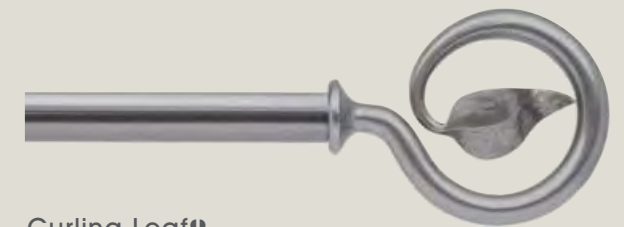

Curling Leaf [Ⓢ]

ø19mm (3/4") Inclusive Length 110mm (4 3/16")
ø25mm (1") Inclusive Length 140mm (5 1/2")
ø38mm (1 1/2") Inclusive Length 200mm (8")



Tusk [Ⓢ]

ø19mm (3/4") Inclusive Length 118mm (4 5/8")
ø25mm (1") Inclusive Length 141mm (5 5/16")



Jacob's Horn [Ⓢ]

ø19mm (3/4") Inclusive Length 105mm (4 1/8")
ø25mm (1") Inclusive Length 130mm (5 1/8")
ø38mm (1 1/2") Inclusive Length 180mm (7 1/16")



Square Ram's Horn

ø19mm (3/4") Inclusive Length 120mm (4 3/4")
ø25mm (1") Inclusive Length 135mm (5 3/16")





Reverse Square Ram's Horn [Ⓢ]



ø19mm (3/4") Inclusive Length 55mm (2 3/16")
ø25mm (1") Inclusive Length 55mm (2 1/16")



Please note that due to manufacturing process's size and shape may vary slightly to images above [Ⓢ] handed finial
For full technical information, sizes and weights please download the specification guide - www.bradleycollection.com/specification-guides/

BRACKETS


Single Brackets

Side	Covered Side	Diameter	Projection from wall to pole centre	Fixing plate size	Covered fixing plate size
		ø19mm (3/4") ø25mm (1") ø38mm (1 1/2") ø50mm (2")	60mm (2 3/8"), 100mm (4") 60mm (2 3/8"), 100mm (4") 100mm (4") 100mm (4")	w20mm (1 3/16") x H84mm (3 5/16") w25mm (1") x H102mm (4") w30mm (1 3/16") x H117mm (4 5/8") w30mm (1 3/16") x H117mm (4 5/8")	w24mm (1 5/16") x H88mm (3 7/16") w29mm (1 1/8") x H106mm (4 3/16") w34mm (1 5/16") x H121mm (4 3/4") w34mm (1 5/16") x H121mm (4 3/4")


Mid	Covered Mid	Diameter	Projection from wall to pole centre	Fixing plate size	Covered fixing plate size
		ø19mm (3/4") ø25mm (1") ø38mm (1 1/2") ø50mm (2")	60mm (2 3/8"), 100mm (4") 60mm (2 3/8"), 100mm (4") 100mm (4") 100mm (4")	w55mm (2 3/16") x H20mm (1 3/16") w60mm (2 3/8") x H25mm (1") w80mm (3 1/8") x H30mm (1 3/16") w80mm (3 1/8") x H30mm (1 3/16")	w59mm (2 5/16") x H24mm (1 9/16") w64mm (2 1/2") x H29mm (1 1/8") w84mm (3 5/16") x H34mm (1 5/16") w84mm (3 5/16") x H34mm (1 5/16")


Passing	Covered Passing	Diameter	Projection from wall to pole centre	Fixing plate size	Covered fixing plate size
		ø19mm (3/4") ø25mm (1") ø38mm (1 1/2") ø50mm (2")	60mm (2 3/8"), 100mm (4") 60mm (2 3/8"), 100mm (4") 100mm (4") 100mm (4")	w55mm (2 3/16") x H20mm (1 3/16") w60mm (2 3/8") x H25mm (1") w80mm (3 1/8") x H30mm (1 3/16") w80mm (3 1/8") x H30mm (1 3/16")	w59mm (2 5/16") x H24mm (1 9/16") w64mm (2 1/2") x H29mm (1 1/8") w84mm (3 5/16") x H34mm (1 5/16") w84mm (3 5/16") x H34mm (1 5/16")

Recess with ring stop	Diameter	Depth off wall	Fixing plate size
	ø19mm (3/4") ø25mm (1") ø38mm (1 1/2") ø50mm (2")	4mm (3/16") 4mm (3/16") 4mm (3/16") 4mm (3/16")	ø42mm (1 3/16") ø50mm (2") ø72mm (2 3/16") ø72mm (2 3/16")


French - End	Diameter	Projection from wall to pole centre	Fixing plate size
	ø25mm (1")	100mm (4")	w26mm (1") x H80mm (3 1/8")


Ceiling Brackets


Ceiling	Diameter	Drop from ceiling to pole centre	Fixing plate size
	ø19mm (3/4") ø25mm (1") ø38mm (1 1/2")	60mm (2 3/8"), 100mm (4") 60mm (2 3/8"), 100mm (4") 100mm (4")	w55mm (2 3/16") x H20mm (1 3/16") w60mm (2 3/8") x H25mm (1") w80mm (3 1/8") x H30mm (1 3/16")

Passing	Diameter	Drop from ceiling to pole centre	Fixing plate size
	ø19mm (3/4") ø25mm (1") ø38mm (1 1/2")	60mm (2 3/8"), 100mm (4") 60mm (2 3/8"), 100mm (4") 100mm (4")	w55mm (2 3/16") x H20mm (1 3/16") w60mm (2 3/8") x H25mm (1") w80mm (3 1/8") x H30mm (1 3/16")


Double Brackets

Side	Diameter	Projection from wall to pole centre	Fixing plate size
	Fø25mm (1") Bø19mm (3/4") Fø38mm (1 1/2") Bø25mm (1")	F160mm (6 5/16") B60mm (2 3/8") F160mm (6 5/16") B60mm (2 3/8")	w25mm (1") x H102mm (4") w30mm (1 3/16") x H117mm (4 5/8")

Mid	Diameter	Projection from wall to pole centre	Fixing plate size
	Fø25mm (1") Bø19mm (3/4") Fø38mm (1 1/2") Bø25mm (1")	F160mm (6 5/16") B60mm (2 3/8") F160mm (6 5/16") B60mm (2 3/8")	w60mm (2 3/8") x H25mm (1") w80mm (3 1/8") x H30mm (1 3/16")

Passing	Diameter	Projection from wall to pole centre	Fixing plate size
	Fø25mm (1") Bø19mm (3/4") Fø38mm (1 1/2") Bø25mm (1")	F160mm (6 5/16") B60mm (2 3/8") F160mm (6 5/16") B60mm (2 3/8")	w112mm (4 7/16") x H50mm (2") w122mm (4 13/16") x H60mm (2 3/8")

Adjustable Brackets

Side	Diameter	Projection from wall to pole centre	Fixing plate size
	ø19mm (3/4") ø25mm (1") ø38mm (1 1/2")	Min.65mm (2 5/16") Max.150mm (5 7/8") Min.75mm (2 15/16") Max.175mm (6 7/8") Min.95mm (3 3/4") Max.200mm (7 7/8")	w20mm (1 3/16") x H84mm (3 5/16") w25mm (1") x H102mm (4") w30mm (1 3/16") x H117mm (4 5/8")

Mid	Passing	Diameter	Projection from wall to pole centre	Fixing plate size
		ø19mm (3/4") ø25mm (1") ø38mm (1 1/2")	Min.65mm (2 5/16") Max.150mm (5 7/8") Min.75mm (2 15/16") Max.175mm (6 7/8") Min.95mm (3 3/4") Max.200mm (7 7/8")	w55mm (2 3/16") x H20mm (1 3/16") w60mm (2 3/8") x H25mm (1") w80mm (3 1/8") x H30mm (1 3/16")

Drapery Arm

drapery arms have been designed to work at dormer windows, doorways & above beds

Diameter	Fixing plate size
ø25mm (1")	w30mm (1 3/16") x H185mm (7 1/4")

RINGS, POLES & ACCESSORIES

Classic Rings

Ring	Diameter	Ring drop from top of pole to bottom of ringlet
	ø19mm (3/4")	44mm (1 3/4")
	ø25mm (1")	49mm (1 5/8")
	ø38mm (1 1/2")	63mm (2 1/2")
	ø50mm (2")	82mm (3 1/4")

Passing Ring	Diameter	Ring drop from top of pole to bottom of ringlet
	ø19mm (3/4")	49mm (1 5/8")
	ø25mm (1")	54mm (2 1/8")
	ø38mm (1 1/2")	71mm (2 3/8")
	ø50mm (2")	89mm (3 1/2")



Poles

Poles are cut, bent and curved to suit individual requirements. When calculating the length of your pole, remember to allow tolerance beyond the width of the frame for the curtains to draw back to the edge of the window.

Maximum pole length in one piece 4.0m (157")*. Poles exceeding the recommended maximum distance between brackets, will be cut into equal parts unless otherwise specified. Pole joiners will be supplied.




Diameter	Recommended maximum distance between brackets	Recommended curtain type for pole diameter	Minimum bend radius	French Pole bend radius
ø19mm (3/4")	1800mm (71")	Light to medium weight, lined & non interlined curtains	R75mm (3")	n/a
ø25mm (1")	2000mm (79")	Medium weight, lined & interlined curtains	R100mm (4")	R50mm (2")
ø38mm (1 1/2")	2200mm (87")	Medium to heavy weight, lined & interlined curtains	R255mm (10")	n/a
ø50mm (2")	2400mm (96")	Heavy weight interlined curtains	R255mm (10")	n/a

*Section lengths over 2.4m (94") will incur a handling charge. For full technical information, sizes and weights please download the specification guide - www.bradleycollection.com/specification-guides/

Ombres

Large Stud



Internal projection from wall: 125mm (4 15/16")
Fixing plate size: ø60mm (2 3/8")

Ball & Collar



Internal projection from wall: 125mm (4 15/16")
Fixing plate size: ø60mm (2 3/8")


Hold back

Standard Stud



Internal measurement: 134mm (5 1/4")
Fixing plate size: w20mm (1 3/16") x H56mm (2 1/8")

Ball & Collar




Tie Back Hook



Internal measurement: 27mm (1 1/16")
Fixing plate size: w20mm (1 3/16") x H78mm (3 1/16")

Draw Rods

Standard Stud



Ball & Collar



Draw rod length: 1000mm (39 3/8")
Custom lengths available to order



Pictured: ø38mm (1 1/2") Pole • Flush Stud • Flint • Satin
Curtain design: Bricks & Mortimer • @bricksandmortimer - London/Greater London area - UK

SIMPLE

Simple has a pleasing economy of line in design.

The sharp, modern form which results from this design intent is relaxed and brought to life by the application of contemporary coated finishes.



SOFTENED EDGES

The distinctive hard-edged and linear styling of the Simple collection is pleasingly softened by coated finishes tuned in to modern interiors.

Pictured: ø38mm (1½") Pole • Disc • Barley - Matte
Curtain design: Village Blinds • @villageblindslondon - London - UK
Photography: Chris Snook • @snookphotography - www.chrissnookphotography.co.uk



Pictured: ø30mm (1 1/8") Pole • Ball • Flint • Satin

IN DETAIL

Pole diameters - Ø19mm (3/4") • 25mm (1") • 30mm (1 1/8") • 38mm (1 1/2") • 50mm (2")

Acrylic pole diameters - Ø50mm (2")

Unlimited system length ◊

Easy install, drop-in brackets with magnetic cover plate

Lined rings

Passing system

Bespoke bending and curving service

50mm (2") Acrylic pole option ⚡

25mm (1") French pole option

- 1 Passing system
- 2 Ceiling brackets
- 3 Custom bending
- 4 Double brackets
- 5 Acrylic pole option
- 6 French pole option - (See page 53-54)
- 7 Drapery arm



◊ Supplied in sections - Maximum section per length 4.0m (157") - Section lengths over 2.4m (94") will incur a handling charge

⚡ Acrylic poles should not be positioned in direct sunlight, and are not suitable for use in conservatories or outdoors

IN DETAIL

FRENCH POLES

The traditional French pole re-styled for modern living, with understated bracket design and lined rings.



Pictured: ø25mm (1") French pole with return bends - Flint - Satin
Interior design: Nelson Design Limited - London - UK

FINISHES

Simple has an unparalleled selection of subtle colour coats, which can be specified in matte, satin or gloss finishes.

For more glamorous projects, metallic coats are featured in both satin and gloss.



Pictured: ø38mm (1 1/2") Pole • Disc • Barley - Matte

Curtain design: Village Blinds • @villageblindslondon - London - UK

Photography: Chris Snook • @snookphotography - www.chrisnookphotography.co.uk

Coat options Matte (M) • Satin (S) • Gloss (G)



Cloud (M-S-G) Ceramic (M-S-G) Bone (M-S-G) Cream (M-S-G) Parchment (M-S-G)



Barley (M-S-G) Dove (M-S-G) Millstone (M-S-G) Clay (M-S-G) Cocoa (M-S-G)



Alabaster (M-S-G) Dusk (M-S-G) Granite (M-S-G) Slate (M-S-G) Flint (M-S-G)



Damson (M-S-G) Moss (M-S-G) Smoke (M-S-G) Frame Grey (M-S-G) Raven (M-S-G)



Platinum (S-G) Champagne (S-G) Gold (S-G) Cognac (S-G) Gunmetal (S-G)



Pewter (S-G) Antique Brass (S-G) Bronzed (S-G) Polished Nickel⁺⊕

Acrylic Pole



Clear⊕

Due to printing limitations colours in this brochure may not be accurate. Samples are available on request - www.bradleycollection.com/samples/

M Matte finishes have a maximum section length of 2.4m (9'4")
 + A finishing charge will apply ⊕ Longer lead-times will apply
 ⊕ Acrylic poles should not be positioned in direct sunlight, and are not suitable for use in conservatories or outdoors

FINIALS

Sharp, modern design softened by the use of contemporary coated finishes.



Flush Stud

- ø19mm (3/4") Inclusive Length 6mm (1/4")
- ø25mm (1") Inclusive Length 6mm (1/4")
- ø30mm (1 3/16") Inclusive Length 6mm (1/4")
- ø38mm (1 1/2") Inclusive Length 8mm (5/16")
- ø50mm (2") Inclusive Length 8mm (5/16")



Stud

- ø19mm (3/4") Inclusive Length 2mm (1/16")
- ø25mm (1") Inclusive Length 3mm (1/8")
- ø30mm (1 3/16") Inclusive Length 3mm (1/8")
- ø38mm (1 1/2") Inclusive Length 3mm (1/8")
- ø50mm (2") Inclusive Length 4mm (3/16")



Disc

- ø19mm (3/4") Inclusive Length 2mm (1/16")
- ø25mm (1") Inclusive Length 3mm (1/8")
- ø30mm (1 3/16") Inclusive Length 3mm (1/8")
- ø38mm (1 1/2") Inclusive Length 3mm (1/8")
- ø50mm (2") Inclusive Length 4mm (3/16")



Large Disc

- ø19mm (3/4") Inclusive Length 4mm (3/16")
- ø25mm (1") Inclusive Length 4mm (3/16")
- ø30mm (1 3/16") Inclusive Length 4mm (3/16")
- ø38mm (1 1/2") Inclusive Length 6mm (1/4")
- ø50mm (2") Inclusive Length 6mm (1/4")




Pebble

- ø19mm (3/4") Inclusive Length 25mm (1")
- ø25mm (1") Inclusive Length 34mm (1 3/16")
- ø30mm (1 3/16") Inclusive Length 39mm (1 7/16")
- ø38mm (1 1/2") Inclusive Length 50mm (1 15/16")
- ø50mm (2") Inclusive Length 66mm (2 7/16")



Ball

- ø19mm (3/4") Inclusive Length 50mm (2")
- ø25mm (1") Inclusive Length 63mm (2 1/2")
- ø30mm (1 3/16") Inclusive Length 62mm (2 7/16")
- ø38mm (1 1/2") Inclusive Length 83mm (3 3/4")
- ø50mm (2") Inclusive Length 104mm (4 1/16")



Crystal Element[⊙]

- ø30mm (1 3/16") Inclusive Length 87mm (3 7/16")
- ø50mm (2") Inclusive Length 126mm (4 15/16")



Crystal Ball[⊙]

- ø19mm (3/4") Inclusive Length 55mm (3 3/16")
- ø25mm (1") Inclusive Length 66mm (2 5/8")
- ø30mm (1 3/16") Inclusive Length 66mm (2 5/8")
- ø38mm (1 1/2") Inclusive Length 85mm (3 3/8")
- ø50mm (2") Inclusive Length 108mm (4 1/4")



Cut Crystal Ball[⊙]

- ø19mm (3/4") Inclusive Length 55mm (3 3/16")
- ø25mm (1") Inclusive Length 66mm (2 5/8")
- ø30mm (1 3/16") Inclusive Length 66mm (2 5/8")
- ø38mm (1 1/2") Inclusive Length 85mm (3 3/8")
- ø50mm (2") Inclusive Length 108mm (4 1/4")



Pictured left to right:
 ø38mm (1 1/2") • Pebble • Moss - Matte • ø19mm (3/4") • Flush Stud • Frame Grey - Matte
 ø50mm (2") • Crystal Ball • Damson - Matte • ø25mm (1") • Ball • Smoke - Matte
 ø30mm (1 3/16") • Large Disc • Raven - Matte




⊙ Crystal Finials should not be positioned in direct sunlight

BRACKETS



Single Brackets

Side 	Diameter ø19mm (3/4") ø25mm (1") ø30mm (1 1/16") ø38mm (1 1/2") ø50mm (2")	Projection from wall to pole centre 60mm (2 3/8"), 100mm (4") 60mm (2 3/8"), 100mm (4") 100mm (4") 100mm (4") 100mm (4")	Fixing plate size w34mm (1 5/16") x h70mm (2 3/4") w34mm (1 5/16") x h70mm (2 3/4") w34mm (1 5/16") x h70mm (2 3/4") w52mm (2 1/16") x h104mm (4 1/8") w52mm (2 1/16") x h104mm (4 1/8")
Mid 	Diameter ø19mm (3/4") ø25mm (1") ø30mm (1 1/16") ø38mm (1 1/2") ø50mm (2")	Projection from wall to pole centre 60mm (2 3/8"), 100mm (4") 60mm (2 3/8"), 100mm (4") 100mm (4") 100mm (4") 100mm (4")	Fixing plate size w70mm (2 3/4") x h34mm (1 5/16") w70mm (2 3/4") x h34mm (1 5/16") w70mm (2 3/4") x h34mm (1 5/16") w104mm (4 1/8") x h52mm (2 1/16") w104mm (4 1/8") x h52mm (2 1/16")
Passing 	Diameter ø19mm (3/4") ø25mm (1") ø30mm (1 1/16") ø38mm (1 1/2") ø50mm (2")	Projection from wall to pole centre 60mm (2 3/8"), 100mm (4") 60mm (2 3/8"), 100mm (4") 100mm (4") 100mm (4") 100mm (4")	Fixing plate size w70mm (2 3/4") x h34mm (1 5/16") w70mm (2 3/4") x h34mm (1 5/16") w70mm (2 3/4") x h34mm (1 5/16") w104mm (4 1/8") x h52mm (2 1/16") w104mm (4 1/8") x h52mm (2 1/16")
Recess with ring stop 	Diameter ø19mm (3/4") ø25mm (1") ø30mm (1 1/16") ø38mm (1 1/2") ø50mm (2")	Depth off wall 7mm (1/4") 8mm (5/16") 10mm (3/8") 12mm (1/2") 15mm (9/16")	Fixing plate size ø26mm (1") ø34mm (1 5/16") ø40mm (1 5/16") ø49mm (1 15/16") ø64mm (2 1/2")
French - End 	Diameter ø25mm (1")	Projection from wall to pole centre 100mm (4")	Fixing plate size w26mm (1") x h80mm (3 1/8")
Ceiling Brackets			
Ceiling 	Diameter ø19mm (3/4") ø25mm (1") ø30mm (1 1/16") ø38mm (1 1/2") ø50mm (2")	Drop from ceiling to pole centre 60mm (2 3/8"), 100mm (4") 60mm (2 3/8"), 100mm (4") 100mm (4") 100mm (4") 100mm (4")	Fixing plate size w70mm (2 3/4") x h34mm (1 5/16") w70mm (2 3/4") x h34mm (1 5/16") w70mm (2 3/4") x h34mm (1 5/16") w104mm (4 1/8") x h52mm (2 1/16") w104mm (4 1/8") x h52mm (2 1/16")
Passing 	Diameter ø19mm (3/4") ø25mm (1") ø30mm (1 1/16") ø38mm (1 1/2") ø50mm (2")	Drop from ceiling to pole centre 60mm (2 3/8"), 100mm (4") 60mm (2 3/8"), 100mm (4") 100mm (4") 100mm (4") 100mm (4")	Fixing plate size w70mm (2 3/4") x h34mm (1 5/16") w70mm (2 3/4") x h34mm (1 5/16") w70mm (2 3/4") x h34mm (1 5/16") w104mm (4 1/8") x h52mm (2 1/16") w104mm (4 1/8") x h52mm (2 1/16")

Double Brackets

Side 	Diameter Fø25mm (1") Bø19mm (3/4") Fø50mm (2") Bø25mm (1")	Projection from wall to pole centre F160mm (6 5/16") B60mm (2 3/8") F200mm (8") B60mm (2 3/8")	Fixing plate size w34mm (1 5/16") x h70mm (2 3/4") w52mm (2 1/16") x h104mm (4 1/8")
Mid 	Diameter Fø25mm (1") Bø19mm (3/4") Fø50mm (2") Bø25mm (1")	Projection from wall to pole centre F160mm (6 5/16") B60mm (2 3/8") F200mm (8") B60mm (2 3/8")	Fixing plate size w70mm (2 3/4") x h34mm (1 5/16") w104mm (4 1/8") x h52mm (2 1/16")
Passing 	Diameter Fø25mm (1") Bø19mm (3/4") Fø50mm (2") Bø25mm (1")	Projection from wall to pole centre F160mm (6 5/16") B60mm (2 3/8") F200mm (8") B60mm (2 3/8")	Fixing plate size w72mm (2 13/16") x h59mm (2 5/16") w52mm (2 1/16") x h104mm (4 1/8")

Adjustable Brackets

Side 	Diameter ø19mm (3/4") ø25mm (1") ø30mm (1 1/16") ø38mm (1 1/2") ø50mm (2")	Projection from wall to pole centre Min.60mm (2 3/8") Max.170mm (6 11/16") Min.60mm (2 3/8") Max.170mm (6 11/16") Min.100mm (4") Max.170mm (6 11/16") Min.100mm (4") Max.170mm (6 11/16") Min.100mm (4") Max.170mm (6 11/16")	Fixing plate size w34mm (1 5/16") x h70mm (2 3/4") w34mm (1 5/16") x h70mm (2 3/4") w34mm (1 5/16") x h70mm (2 3/4") w52mm (2 1/16") x h104mm (4 1/8") w52mm (2 1/16") x h104mm (4 1/8")
Passing 	Diameter ø19mm (3/4") ø25mm (1") ø30mm (1 1/16") ø38mm (1 1/2") ø50mm (2")	Projection from wall to pole centre Min.60mm (2 3/8") Max.170mm (6 11/16") Min.60mm (2 3/8") Max.170mm (6 11/16") Min.100mm (4") Max.170mm (6 11/16") Min.100mm (4") Max.170mm (6 11/16") Min.100mm (4") Max.170mm (6 11/16")	Fixing plate size w34mm (1 5/16") x h70mm (2 3/4") w34mm (1 5/16") x h70mm (2 3/4") w34mm (1 5/16") x h70mm (2 3/4") w52mm (2 1/16") x h104mm (4 1/8") w52mm (2 1/16") x h104mm (4 1/8")

Drapery Arm

Drapery arms have been designed to work at dormer windows, doorways & above beds

	Diameter ø25mm (1")	Fixing plate size w34mm (1 5/16") x h156mm (6 1/8")
---	-------------------------------	---

RINGS, POLES & ACCESSORIES

Lined Rings


Ring	Diameter	Ring drop from top of pole to bottom of ringlet
	ø19mm (3/4") ø25mm (1") ø30mm (1 3/16") ø38mm (1 1/2") ø50mm (2")	46mm (1 13/16") 51mm (2") 51mm (2") 66mm (2 5/8") 80mm (3 1/8")

Passing Ring	Diameter	Ring drop from top of pole to bottom of ringlet
	ø19mm (3/4") ø25mm (1") ø30mm (1 3/16") ø38mm (1 1/2") ø50mm (2")	46mm (1 13/16") 51mm (2") 51mm (2") 66mm (2 5/8") 80mm (3 1/8")

Poles



Poles are cut, bent and curved to suit individual requirements. When calculating the length of your pole, remember to allow tolerance beyond the width of the frame for the curtains to draw back to the edge of the window.

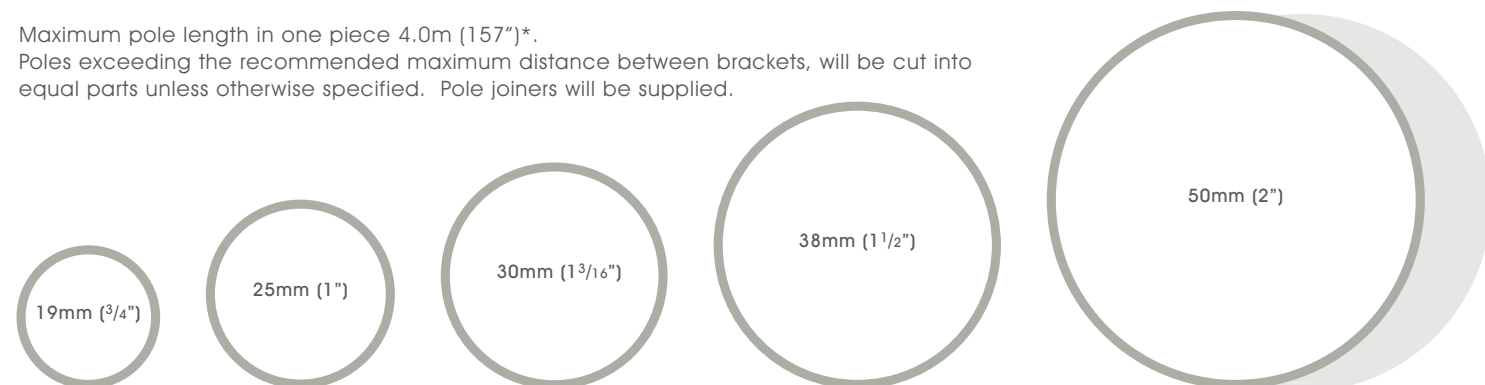Maximum pole length in one piece 4.0m (157")*. Poles exceeding the recommended maximum distance between brackets, will be cut into equal parts unless otherwise specified. Pole joiners will be supplied.



Diameter	Recommended maximum distance between brackets	Recommended curtain type for pole diameter	Minimum bend radius	French Pole bend radius
ø19mm (3/4")	1800mm (71")	Light to medium weight, lined & non interlined curtains	R75mm (3")	n/a
ø25mm (1")	2000mm (79")	Medium weight, lined & interlined curtains	R100mm (4")	R50mm (2")
ø30mm (1 3/16")	2100mm (83")	Medium weight, lined & interlined curtains	R255mm (10")	n/a
ø38mm (1 1/2")	2200mm (87")	Medium to heavy weight, lined & interlined curtains	R255mm (10")	n/a
ø50mm (2")	2400mm (96")	Heavy weight interlined curtains	R255mm (10")	n/a
ø50mm (2") Acrylic pole	1500mm (59")	Medium weight, lined & interlined curtains	R200mm (8")	n/a


Ombres

Small	Large
	
Internal projection from wall: 150mm (5 7/8") Fixing plate size: ø19mm (3/4")	Internal projection from wall: 150mm (5 7/8") Fixing plate size: ø25mm (1")



Hold back


Internal measurement: 137mm (5 3/8") Fixing plate size: ø44mm (1 3/4")

Tie Back Hook


Projection: 29mm (1 1/8") Fixing plate size: w25mm (1") x h74mm (2 15/16")

Draw Rods

Fine	Standard
	
Draw rod length: 1000mm (39 3/8") Custom lengths available to order	

*Section lengths over 2.4m (94") will incur a handling charge ☼ Acrylic poles should not be positioned in direct sunlight, and are not suitable for use in conservatories or outdoors For full technical information, sizes and weights please download the specification guide - www.bradleycollection.com/specification-guides/



Pictured: ø50mm (2") Pole • Stud • Brushed Stainless
Interior design: Bayon Design Studio Inc - California - USA

STAINLESS

The modernist stainless collection is a perfect example of form following function. the design language is pure and simple, with sharp linear forms resulting from the machining process.

The brushed and mirrored surface finishes, combined with subtle tinting technology emphasise the innate qualities of the high grade stainless steel used throughout.

REFINED AND RESILIENT

High grade stainless steel in this collection works for wet rooms, coastal settings and outdoors.

Pictured: ø38mm (1 1/2") Pole • Squat Disc • Brushed Carbon Tint
Shown with: Lewis & Wood - Skittery Linen





Pictured: ø25mm (1") Pole • Octagon Stud • Brushed Brass Tint
Shown with: Lewis & Wood - Linen Taffeta

IN DETAIL

Pole diameters - Ø19mm (¾") • 25mm (1") • 38mm (1½") • 50mm (2")
 Acrylic pole diameters - Ø50mm (2")

- Unlimited system length ◊
- Easy install, drop-in brackets with magnetic cover plate
- Lined rings in stainless steel on all diameters
- Passing system
- Bespoke bending and curving service
- Can be specified for wet room/outdoor use ☼
- 50mm (2") Acrylic pole option ☼

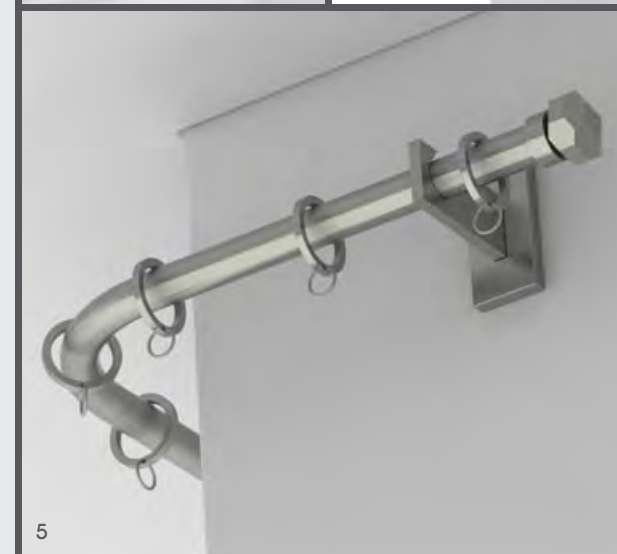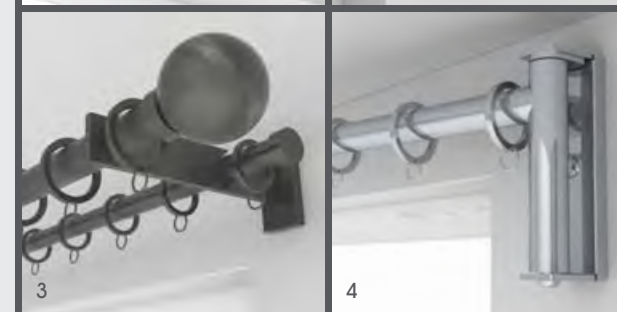

- 1 Passing system
- 2 Ceiling brackets
- 3 Double brackets
- 4 Drapery arm
- 5 Custom bending
- 6 Acrylic pole option

◊ Supplied in sections - Maximum section per length 2.4m (94")
 ☼ Acrylic poles should not be positioned in direct sunlight, and are not suitable for use in conservatories or outdoors

FINISHES




Pictured left to right: ø25mm (1") • Stud • Brushed Stainless • Brushed Brass Tint • Brushed Copper Tint • Brushed Rose Tint • Brushed Bronze Tint • Brushed Carbon Tint
Mirrored Stainless • Mirrored Brass Tint • Mirrored Copper Tint • Mirrored Rose Tint • Mirrored Bronze Tint • Mirrored Carbon Tint


The renowned qualities of authentic stainless steel are emphasised by either a brushed or polished surface treatment, while a unique tinting process brings exciting new opportunities for modern design schemes.

An acrylic pole is now available, to be specified with stainless components.


Brushed

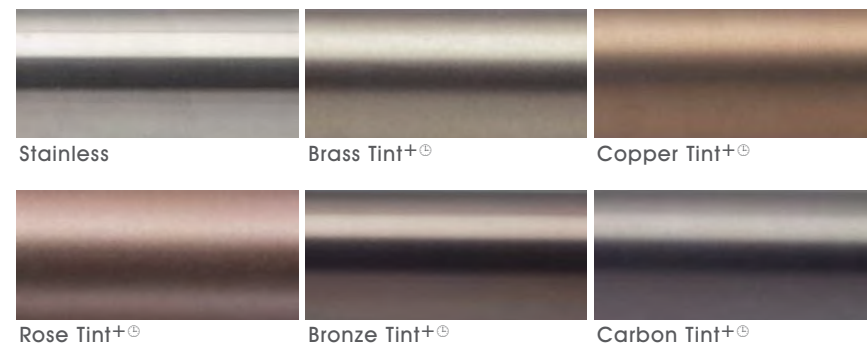

Mirrored

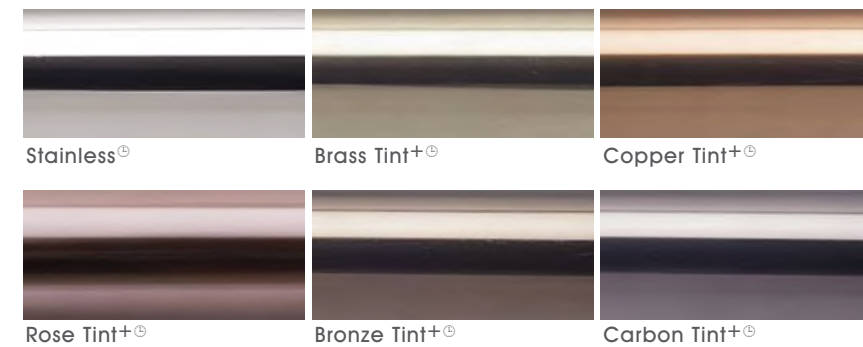

Acrylic Pole



Due to printing limitations colours in this brochure may not be accurate
Samples are available on request - www.bradleycollection.com/samples/

+ A finishing charge will apply + Longer lead-times will apply * Acrylic poles should not be positioned in direct sunlight, and are not suitable for use in conservatories or outdoors

FINIALS

Modern, linear forms presented in brushed and mirrored finishes.

Pictured left to right: ø25mm (1") • Disc • Brushed Stainless • Octagon Stud • Brushed Carbon Tint Knurled Stud • Brushed Brass Tint • Large Disc • Brushed Copper Tint • Faceted Disc • Mirrored Stainless Ball • Brushed Bronze Tint • Squat Disc • Mirrored Brass Tint • Stud • Brushed Rose Tint




Stud

- ø19mm (3/4") Inclusive Length 2mm (1/16")
- ø25mm (1") Inclusive Length 3mm (1/8")
- ø38mm (1 1/2") Inclusive Length 3mm (1/8")
- ø50mm (2") Inclusive Length 4mm (3/16")



Knurled Stud

- ø19mm (3/4") Inclusive Length 5mm (3/16")
- ø25mm (1") Inclusive Length 7mm (1/4")
- ø38mm (1 1/2") Inclusive Length 7mm (1/4")
- ø50mm (2") Inclusive Length 9mm (3/8")



Octagon Stud

- ø19mm (3/4") Inclusive Length 7mm (1/4")
- ø25mm (1") Inclusive Length 10mm (3/8")
- ø38mm (1 1/2") Inclusive Length 11mm (7/16")
- ø50mm (2") Inclusive Length 14mm (9/16")



Squat Disc

- ø19mm (3/4") Inclusive Length 17mm (11/16")
- ø25mm (1") Inclusive Length 23mm (7/8")
- ø38mm (1 1/2") Inclusive Length 33mm (1 5/16")
- ø50mm (2") Inclusive Length 44mm (1 3/4")



Disc

- ø19mm (3/4") Inclusive Length 2mm (1/16")
- ø25mm (1") Inclusive Length 3mm (1/8")
- ø38mm (1 1/2") Inclusive Length 3mm (1/8")
- ø50mm (2") Inclusive Length 4mm (3/16")



Large Disc

- ø19mm (3/4") Inclusive Length 4mm (3/16")
- ø25mm (1") Inclusive Length 4mm (3/16")
- ø38mm (1 1/2") Inclusive Length 6mm (1/4")
- ø50mm (2") Inclusive Length 6mm (1/4")



Faceted Disc

- ø19mm (3/4") Inclusive Length 21mm (1 3/16")
- ø25mm (1") Inclusive Length 28mm (1 1/8")
- ø38mm (1 1/2") Inclusive Length 41mm (1 5/8")
- ø50mm (2") Inclusive Length 54mm (2 1/8")







Ball



- ø19mm (3/4") Inclusive Length 50mm (2")
- ø25mm (1") Inclusive Length 63mm (2 1/2")
- ø38mm (1 1/2") Inclusive Length 83mm (3 1/4")
- ø50mm (2") Inclusive Length 104mm (4 1/16")

BRACKETS




Single Brackets

Side	Diameter	Projection from wall to pole centre	Fixing plate size
	ø19mm (3/4") ø25mm (1") ø38mm (1 1/2") ø50mm (2")	60mm (2 3/8"), 100mm (4") 60mm (2 3/8"), 100mm (4") 100mm (4") 100mm (4")	w34mm (1 3/16") x h70mm (2 3/4") w34mm (1 3/16") x h70mm (2 3/4") w52mm (2 1/8") x h104mm (4 1/8") w52mm (2 1/8") x h104mm (4 1/8")
Mid	Diameter	Projection from wall to pole centre	Fixing plate size
	ø19mm (3/4") ø25mm (1") ø38mm (1 1/2") ø50mm (2")	60mm (2 3/8"), 100mm (4") 60mm (2 3/8"), 100mm (4") 100mm (4") 100mm (4")	w70mm (2 3/4") x h34mm (1 3/16") w70mm (2 3/4") x h34mm (1 3/16") w104mm (4 1/8") x h52mm (2 1/8") w104mm (4 1/8") x h52mm (2 1/8")
Passing	Diameter	Projection from wall to pole centre	Fixing plate size
	ø19mm (3/4") ø25mm (1") ø38mm (1 1/2") ø50mm (2")	60mm (2 3/8"), 100mm (4") 60mm (2 3/8"), 100mm (4") 100mm (4") 100mm (4")	w70mm (2 3/4") x h34mm (1 3/16") w70mm (2 3/4") x h34mm (1 3/16") w104mm (4 1/8") x h52mm (2 1/8") w104mm (4 1/8") x h52mm (2 1/8")
Recess with ring stop	Diameter	Depth off wall	Fixing plate size
	ø19mm (3/4") ø25mm (1") ø38mm (1 1/2") ø50mm (2")	7mm (1/4") 8mm (5/16") 12mm (1/2") 15mm (9/16")	ø26mm (1") ø34mm (1 3/16") ø49mm (1 13/16") ø64mm (2 1/2")



Ceiling Brackets

Ceiling	Diameter	Drop from ceiling to pole centre	Fixing plate size
	ø19mm (3/4") ø25mm (1") ø38mm (1 1/2") ø50mm (2")	60mm (2 3/8"), 100mm (4") 60mm (2 3/8"), 100mm (4") 100mm (4") 100mm (4")	w70mm (2 3/4") x h34mm (1 3/16") w70mm (2 3/4") x h34mm (1 3/16") w104mm (4 1/8") x h52mm (2 1/8") w104mm (4 1/8") x h52mm (2 1/8")
Passing	Diameter	Drop from ceiling to pole centre	Fixing plate size
	ø19mm (3/4") ø25mm (1") ø38mm (1 1/2") ø50mm (2")	60mm (2 3/8"), 100mm (4") 60mm (2 3/8"), 100mm (4") 100mm (4") 100mm (4")	w70mm (2 3/4") x h34mm (1 3/16") w70mm (2 3/4") x h34mm (1 3/16") w104mm (4 1/8") x h52mm (2 1/8") w104mm (4 1/8") x h52mm (2 1/8")

Double Brackets

Side	Diameter	Projection from wall to pole centre	Fixing plate size
	Fø25mm (1") Bø19mm (3/4") Fø50mm (2") Bø25mm (1")	F160mm (6 5/16") B60mm (2 3/8") F200mm (8") B60mm (2 3/8")	w34mm (1 3/16") x h70mm (2 3/4") w52mm (2 1/8") x h104mm (4 1/8")
Mid	Diameter	Projection from wall to pole centre	Fixing plate size
	Fø25mm (1") Bø19mm (3/4") Fø50mm (2") Bø25mm (1")	F160mm (6 5/16") B60mm (2 3/8") F200mm (8") B60mm (2 3/8")	w70mm (2 3/4") x h34mm (1 3/16") w104mm (4 1/8") x h52mm (2 1/8")
Passing	Diameter	Projection from wall to pole centre	Fixing plate size
	Fø25mm (1") Bø19mm (3/4") Fø50mm (2") Bø25mm (1")	F160mm (6 5/16") B60mm (2 3/8") F200mm (8") B60mm (2 3/8")	w72mm (2 13/16") x h59mm (2 3/8") w52mm (2 1/8") x h104mm (4 1/8")

Adjustable Brackets

Side	Diameter	Projection from wall to pole centre	Fixing plate size
	ø19mm (3/4") ø25mm (1") ø38mm (1 1/2") ø50mm (2")	Min.60mm (2 3/8") Max.170mm (6 11/16") Min.60mm (2 3/8") Max.170mm (6 11/16") Min.100mm (4") Max.170mm (6 11/16") Min.100mm (4") Max.170mm (6 11/16")	w34mm (1 3/16") x h70mm (2 3/4") w34mm (1 3/16") x h70mm (2 3/4") w52mm (2 1/8") x h104mm (4 1/8") w52mm (2 1/8") x h104mm (4 1/8")
Passing	Diameter	Projection from wall to pole centre	Fixing plate size
	ø19mm (3/4") ø25mm (1") ø38mm (1 1/2") ø50mm (2")	Min.60mm (2 3/8") Max.170mm (6 11/16") Min.60mm (2 3/8") Max.170mm (6 11/16") Min.100mm (4") Max.170mm (6 11/16") Min.100mm (4") Max.170mm (6 11/16")	w34mm (1 3/16") x h70mm (2 3/4") w34mm (1 3/16") x h70mm (2 3/4") w52mm (2 1/8") x h104mm (4 1/8") w52mm (2 1/8") x h104mm (4 1/8")

Drapery Arm


Drapery arms have been designed to work at dormer windows, doorways & above beds

Diameter	Fixing plate size
ø25mm (1")	w34mm (1 3/16") x h156mm (6 1/8")




RINGS, POLES & ACCESSORIES

Lined Rings

Ring	Diameter	Ring drop from top of pole to bottom of ringlet
	ø19mm (3/4")	47mm (1 7/8")
	ø25mm (1")	55mm (2 1/8")
	ø38mm (1 1/2")	66mm (2 5/8")
	ø50mm (2")	80mm (3 1/8")


Passing Ring	Diameter	Ring drop from top of pole to bottom of ringlet
	ø19mm (3/4")	47mm (1 7/8")
	ø25mm (1")	55mm (2 1/8")
	ø38mm (1 1/2")	66mm (2 5/8")
	ø50mm (2")	80mm (3 1/8")

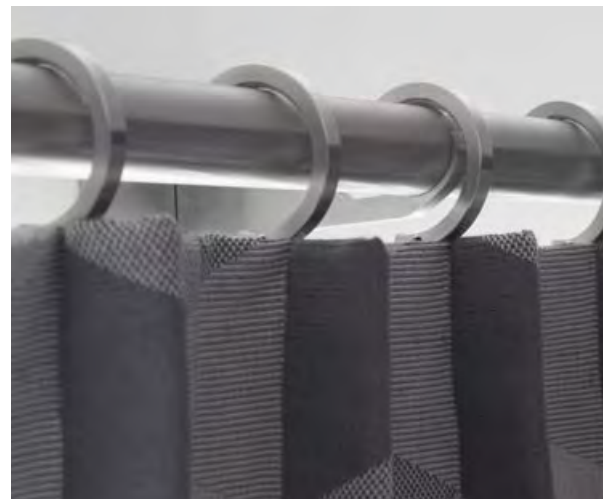

Poles

Poles are cut, bent and curved to suit individual requirements. When calculating the length of your pole, remember to allow tolerance beyond the width of the frame for the curtains to draw back to the edge of the window.

Maximum pole length in one piece 2.4m (96"). Poles exceeding the recommended maximum distance between brackets, will be cut into equal parts unless otherwise specified. Pole joiners will be supplied.

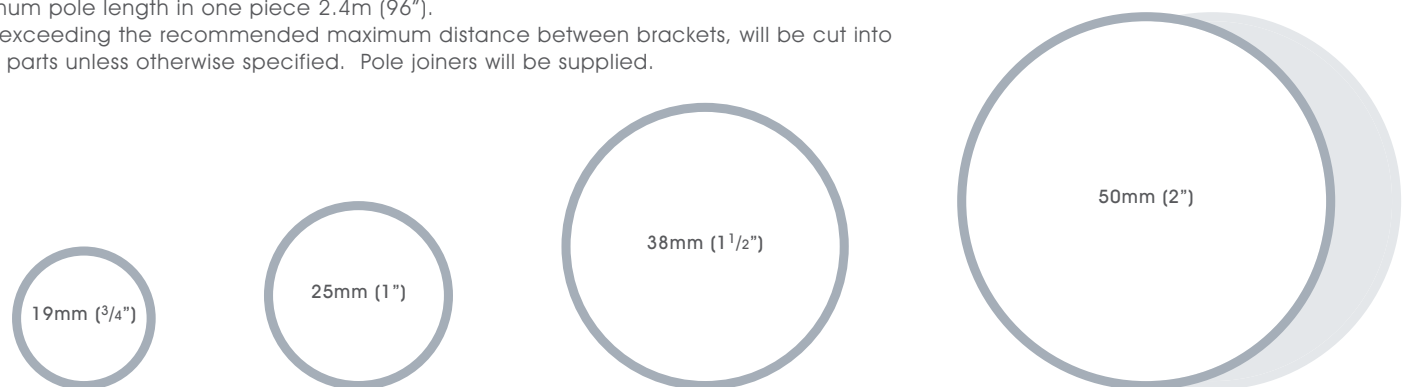

Diameter	Recommended maximum distance between brackets	Recommended curtain type for pole diameter	Minimum bend radius
ø19mm (3/4")	1800mm (71")	Light to medium weight, lined & non interlined curtains	R75mm (3")
ø25mm (1")	2000mm (79")	Medium weight, lined & interlined curtains	R100mm (4")
ø38mm (1 1/2")	2200mm (87")	Medium to heavy weight, lined & interlined curtains	R255mm (10")
ø50mm (2")	2400mm (96")	Heavy weight interlined curtains	R255mm (10")
ø50mm (2") Acrylic pole	1500mm (59")	Medium weight, lined & interlined curtains	R200mm (8")

Ombres

Small



Internal projection from wall: 150mm (5 7/8")
Fixing plate size: ø19mm (3/4")

Large



Internal projection from wall: 150mm (5 7/8")
Fixing plate size: ø25mm (1")

Hold back



Internal measurement: 137mm (5 3/8")
Fixing plate size: ø44mm (1 3/4")

Tie Back Hook



Projection: 29mm (1 1/8")
Fixing plate size: w25mm (1") x h74mm (2 9/16")

Draw Rods

Fine



Standard



Draw rod length:
1000mm (39 3/8")
Custom lengths available to order

Acrylic poles should not be positioned in direct sunlight, and are not suitable for use in conservatories or outdoors. For full technical information, sizes and weights please download the specification guide - www.bradleycollection.com/specification-guides/



Pictured: ø50mm (2") Pole • Templar • Clay - Gloss

ELYSIAN

Elysian bridges the gap between two very different aesthetics, combining pared down modernist style with decorative sensibility.

Offered in an inspirational palette of solid and metallic finishes, Elysian is designed to perform in residential, hospitality and contract settings.



DESIGN FUSION

Elysian delivers on functionality, whilst elevating drapery hardware to the level of high-end design statement

Pictured: ø50mm (2") • Squat Globe • Bronzed - Gloss
Templar • Antique Brass - Gloss • Flute • Pewter - Gloss




Pictured: ø50mm (2") Pole • Halo • Platinum - Gloss

IN DETAIL

Pole diameters - Ø30mm (1 3/16") • 50mm (2")

- Unlimited system length◇
- Easy install, drop-in brackets with magnetic cover plate
- Lined rings
- Passing system
- Bespoke bending service

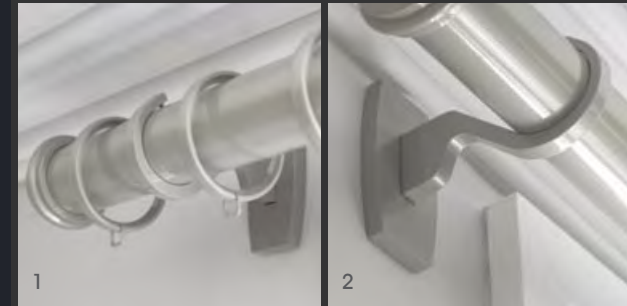

- 1 Transitional styling
- 2 Bracket design
- 3 Ombre
- 4 Draw rod
- 5 Custom bending

◇ Supplied in sections - Maximum section per length 4.0m (157")
 Section lengths over 2.4m (94") will incur a handling charge

FINISHES

An unparalleled selection of coated and plated finishes, allows Elysian to express emotions ranging from the sober and understated to the glamorous and flamboyant.

Coat options Matte (M) • Satin (S) • Gloss (G)



Pictured from left to right: ø50mm (2") • Templar • Champagne - Gloss
Gunmetal - Gloss • Gold - Gloss • Platinum - Gloss • Cognac - Gloss

Cloud (M-S-G)	Ceramic (M-S-G)	Bone (M-S-G)	Cream (M-S-G)	Parchment (M-S-G)
Barley (M-S-G)	Dove (M-S-G)	Millstone (M-S-G)	Clay (M-S-G)	Cocoa (M-S-G)
Alabaster (M-S-G)	Dusk (M-S-G)	Granite (M-S-G)	Slate (M-S-G)	Flint (M-S-G)
Damson (M-S-G)	Moss (M-S-G)	Smoke (M-S-G)	Frame Grey (M-S-G)	Raven (M-S-G)
Platinum (S-G)	Champagne (S-G)	Gold (S-G)	Cognac (S-G)	Gunmetal (S-G)
Pewter (S-G)	Antique Brass (S-G)	Bronzed (S-G)		Polished Nickel ⁺ ⊕♦

Due to printing limitations colours in this brochure may not be accurate
Samples are available on request - www.bradleycollection.com/samples/

+ A finishing charge will apply ⊕ Longer lead-times will apply ♦ Maximum section length of 2.4m (94")

M Matte finishes have a maximum section length of 2.4m (94")

⊛ Acrylic poles should not be positioned in direct sunlight, and are not suitable for use in conservatories or outdoors

FINIALS

Traditional styling cues have been streamlined to suit modern living, resulting in the distinctive curvilinear character of Elysian.



Picture: ø50mm (2") • Charm • Champagne - Gloss • Halo • Gold - Gloss • Squat Globe • Bronzed - Gloss
Crystal Globe • Gunmetal - Gloss • Templar • Antique Brass - Gloss • Flute • Pewter - Gloss
Globe • Platinum - Gloss • Crystal Templar • Cognac - Gloss



Halo

ø30mm (1³/₁₆" Inclusive Length 5mm (3/₁₆")
ø50mm (2") Inclusive Length 2mm (1/₁₆")



Squat Globe

ø30mm (1³/₁₆" Inclusive Length 69mm (2¹¹/₁₆")
ø50mm (2") Inclusive Length 117mm (4⁵/₈")



Flute

ø30mm (1³/₁₆" Inclusive Length 73mm (2⁷/₈")
ø50mm (2") Inclusive Length 114mm (4¹/₂")



Charm

ø30mm (1³/₁₆" Inclusive Length 69mm (2¹¹/₁₆")
ø50mm (2") Inclusive Length 117mm (4⁵/₈")



Globe

ø30mm (1³/₁₆" Inclusive Length 73mm (2⁷/₈")
ø50mm (2") Inclusive Length 114mm (4¹/₂")



Crystal Globe☼

ø30mm (1³/₁₆" Inclusive Length 73mm (2⁷/₈")
ø50mm (2") Inclusive Length 114mm (4¹/₂")



Templar

ø30mm (1³/₁₆" Inclusive Length 79mm (3¹/₈")
ø50mm (2") Inclusive Length 119mm (4¹¹/₁₆")







Crystal Templar☼

ø30mm (1³/₁₆" Inclusive Length 79mm (3¹/₈")
ø50mm (2") Inclusive Length 119mm (4¹¹/₁₆")



☼ Crystal Finials should not be positioned in direct sunlight
For full technical information, sizes and weights please download the specification guide - www.bradleycollection.com/specification-guides/

BRACKETS




Single Brackets

Side	Diameter	Projection from wall to pole centre	Fixing plate size
	ø30mm (1 ³ / ₁₆ "") ø50mm (2")	100mm (4") 100mm (4")	w40mm (1 ⁹ / ₁₆ "") x H86mm (3 ³ / ₈ "") w50mm (2") x H105mm (4 ¹ / ₈ "")
Mid	Diameter	Projection from wall to pole centre	Fixing plate size
	ø30mm (1 ³ / ₁₆ "") ø50mm (2")	100mm (4") 100mm (4")	w86mm (3 ³ / ₈ "") x H40mm (1 ⁹ / ₁₆ "") w105mm (4 ¹ / ₈ "") x H50mm (2")
Passing	Diameter	Projection from wall to pole centre	Fixing plate size
	ø30mm (1 ³ / ₁₆ "") ø50mm (2")	100mm (4") 100mm (4")	w86mm (3 ³ / ₈ "") x H40mm (1 ⁹ / ₁₆ "") w105mm (4 ¹ / ₈ "") x H50mm (2")
Recess with ring stop	Diameter	Depth off wall	Fixing plate size
	ø30mm (1 ³ / ₁₆ "") ø50mm (2")	10mm (3/ ₈ "") 15mm (9/ ₁₆ "")	ø40mm (1 ⁹ / ₁₆ "") ø64mm (2 ¹ / ₂ "")


Ceiling Brackets

Ceiling	Diameter	Drop from ceiling to pole centre	Fixing plate size
	ø30mm (1 ³ / ₁₆ "") ø50mm (2")	100mm (4") 100mm (4")	w86mm (3 ³ / ₈ "") x H40mm (1 ⁹ / ₁₆ "") w105mm (4 ¹ / ₈ "") x H50mm (2")
Passing	Diameter	Drop from ceiling to pole centre	Fixing plate size
	ø30mm (1 ³ / ₁₆ "") ø50mm (2")	100mm (4") 100mm (4")	w86mm (3 ³ / ₈ "") x H40mm (1 ⁹ / ₁₆ "") w105mm (4 ¹ / ₈ "") x H50mm (2")

Double Brackets

Side	Diameter	Projection from wall to pole centre	Fixing plate size
	ø50mm (2") Bø30mm (1 ³ / ₁₆ "")	F200mm (8") B60mm (2 ³ / ₈ "")	w50mm (2") x H105mm (4 ¹ / ₈ "")
Mid	Diameter	Projection from wall to pole centre	Fixing plate size
	ø50mm (2") Bø30mm (1 ³ / ₁₆ "")	F200mm (8") B60mm (2 ³ / ₈ "")	w105mm (4 ¹ / ₈ "") x H50mm (2")
Passing	Diameter	Projection from wall to pole centre	Fixing plate size
	ø50mm (2") Bø30mm (1 ³ / ₁₆ "")	F200mm (8") B60mm (2 ³ / ₈ "")	w105mm (4 ¹ / ₈ "") x H73mm (2 ⁷ / ₈ "")

Adjustable Brackets

Side	Diameter	Projection from wall to pole centre	Fixing plate size
	ø30mm (1 ³ / ₁₆ "") ø50mm (2")	Min. 100mm (4") Max. 170mm (6 ¹¹ / ₁₆ "") Min. 100mm (4") Max. 170mm (6 ¹¹ / ₁₆ "")	w40mm (1 ⁹ / ₁₆ "") x H86mm (3 ³ / ₈ "") w50mm (2") x H105mm (4 ¹ / ₈ "")
Mid	Diameter	Projection from wall to pole centre	Fixing plate size
	ø30mm (1 ³ / ₁₆ "") ø50mm (2")	Min. 100mm (4") Max. 170mm (6 ¹¹ / ₁₆ "") Min. 100mm (4") Max. 170mm (6 ¹¹ / ₁₆ "")	w86mm (3 ³ / ₈ "") x H40mm (1 ⁹ / ₁₆ "") w105mm (4 ¹ / ₈ "") x H50mm (2")
Passing	Diameter	Projection from wall to pole centre	Fixing plate size
	ø30mm (1 ³ / ₁₆ "") ø50mm (2")	Min. 100mm (4") Max. 170mm (6 ¹¹ / ₁₆ "") Min. 100mm (4") Max. 170mm (6 ¹¹ / ₁₆ "")	w86mm (3 ³ / ₈ "") x H40mm (1 ⁹ / ₁₆ "") w105mm (4 ¹ / ₈ "") x H50mm (2")

RINGS, POLES & ACCESSORIES

Lined Rings

Ring



Diameter

ø30mm (1³/₁₆"")
ø50mm (2")

Ring drop from top of pole to bottom of ringlet

51mm (2")
80mm (3¹/₈"")

Passing Ring



Diameter

ø30mm (1³/₁₆"")
ø50mm (2")


Ring drop from top of pole to bottom of ringlet

51mm (2")
80mm (3¹/₈"")

Poles

Poles are cut, bent and curved to suit individual requirements. When calculating the length of your pole, remember to allow tolerance beyond the width of the frame for the curtains to draw back to the edge of the window.

Maximum pole length in one piece 4.0m (157")*. Poles exceeding the recommended maximum distance between brackets, will be cut into equal parts unless otherwise specified. Pole joiners will be supplied.

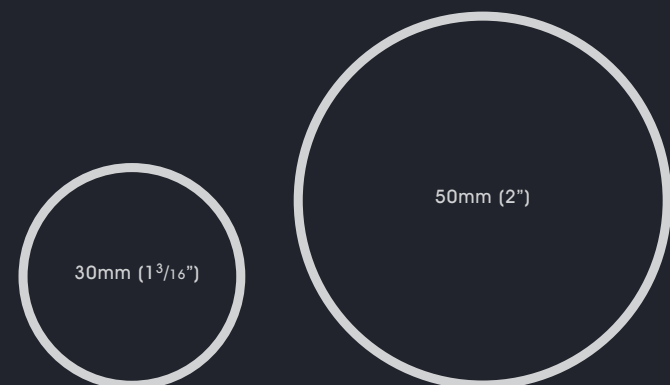

Diameter	Recommended maximum distance between brackets	Recommended curtain type for pole diameter	Minimum bend radius
ø30mm (1 ³ / ₁₆ "")	2100mm (83")	Medium weight, lined & interlined curtains	R255mm (10")
ø50mm (2")	2400mm (96")	Heavy weight interlined curtains	R255mm (10")

Ombres



Internal projection from wall: 150mm (7⁷/₈"")
Fixing plate size: ø68mm (2¹¹/₁₆"")

Hold back



Internal measurement: 137mm (5³/₈"")
Fixing plate size: ø44mm (1³/₄"")

Tie Back Hook




Projection: 29mm (1¹/₈"")
Fixing plate size: w25mm (1") x h74mm (2¹⁵/₁₆"")

Draw Rods

Fine



Standard



Draw rod length:
1000mm (39³/₈"")
Custom lengths available to order

*Section lengths over 2.4m (94") will incur a handling charge
For full technical information, sizes and weights please download the specification guide - www.bradleycollection.com/specification-guides/



Pictured: ø38mm (1 1/2") Classic Coverpole • Standard Stud • Brass Toned

Project by: Gallagher London - London SW7 - UK

ECLIPSE ELECTRIC

Peerless and opulent, this collection truly has no rival.

A rare, luxurious aesthetic and freedom of expression in design are balanced with the final word in functionality and control.

The world's finest.



Pictured: ø38mm (1 1/2") Classic Coverpole • Standard Stud • Brass Toned
 Project by: Gallagher London - London SW7 - UK

ECLIPSE ELECTRIC

Sublime curtain pole covers in brass, wood, steel and stainless steel. Teamed with state of the art electric tracks to create a true design statement.

Pole systems powered by a choice of leading brands; Silent Gliss, Somfy and Lutron.

For windows where motorisation is not required, hand drawn versions are also available.

PROGRESSIVE

The use of authentic stainless steel lends the progressive design group its distinctive modern feel.



Pictured: ø38mm (1½") Progressive Coverpole • Faceted Disc • Brushed

CLASSIC

Classic designs are created using traditional mild steel, allowing soft contours and subtle translucent effects.



Pictured: ø38mm (1½") Classic Coverpole • Standard Stud • Waxed

DECO

Solid wood & real brass are the heroes within the Deco design group. Classical styling is sharpened to suit contemporary taste.



Pictured: ø50mm (2") Deco Wood Coverpole • Slate • Flute • Polished Nickel

Eclipse provides elegant decorative pole covers, finials & brackets in a selection of authentic materials, with a choice of superb electric tracks and controls.



Pictured - ø50mm (2") Deco Brass Coverpole • Squat Ball • Aged Brass

LEADING MOTOR OPTIONS




FINISHES

Metal poles and components may all be finished in this entire palette of subtle colour coats in matte, satin or gloss finishes and metallic coats in satin or gloss.

Progressive, Classic and Deco elements each have some additional specific finishes, based on their inherent material properties. These specialist finishes are listed on the individual final pages.

Coat options Matte (M) • Satin (S) • Gloss (G) • Paint over Tulip Wood (P)

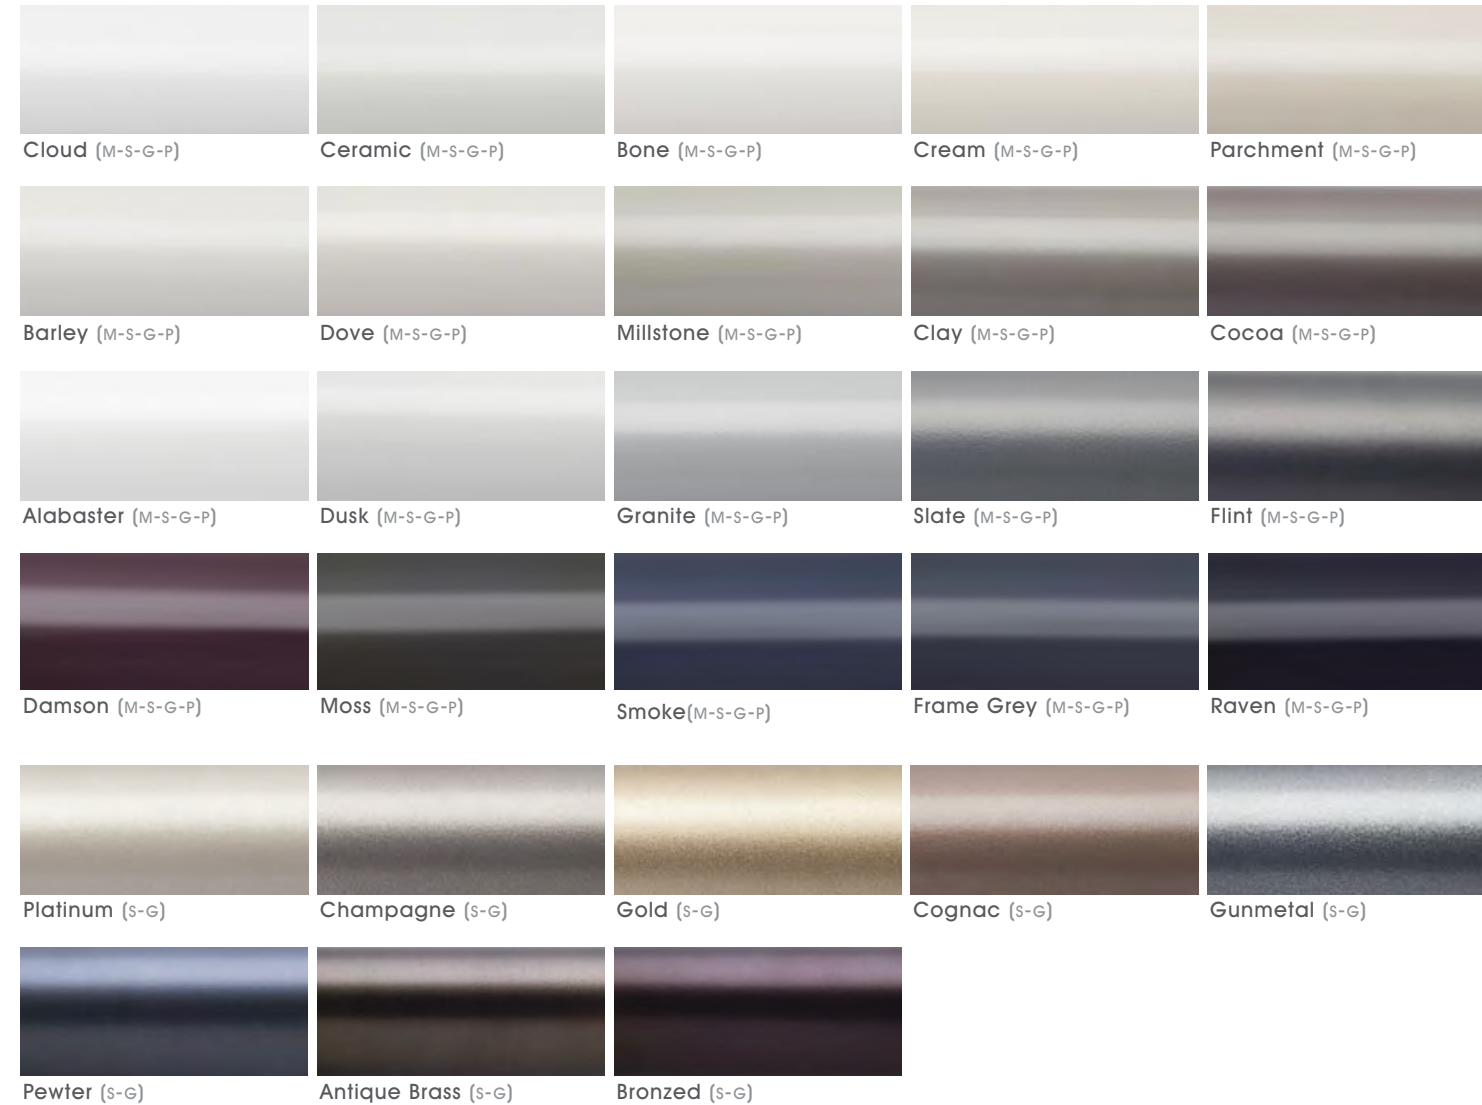

Due to printing limitations colours in this brochure may not be accurate
Samples are available on request - www.bradleycollection.com/samples/

M Matte finishes have a maximum section length of 2.4m (94")



Pictured: ø30mm (1 1/8") Progressive Coverpole • Ball • Brushed Brass Tint

Interior design: Furnished by Anna - @furnishedbyanna - Sevenoaks - UK

Photography: Ryan Wicks @ryanwicksphoto

FINIALS

PROGRESSIVE

This contemporary design edit emphasises and enhances the sharp, architectural nature of stainless steel.

Picture: ø38mm (1½") Progressive Coverpole • Contrast Stud • Brushed



Flush End Cap[Ⓜ] - Supplied as standard

ø30mm (1¾") Inclusive Length 6mm (¼")
 ø38mm (1½") Inclusive Length 6mm (¼")
 ø50mm (2") Inclusive Length 6mm (¼")



Octagon Stud

ø30mm (1¾") Inclusive Length 10mm (¾")
 ø38mm (1½") Inclusive Length 11mm (7⁄8")
 ø50mm (2") Inclusive Length 14mm (2⁄5")



Faceted Disc

ø30mm (1¾") Inclusive Length 31mm (1¼")
 ø38mm (1½") Inclusive Length 45mm (1¾")
 ø50mm (2") Inclusive Length 59mm (2½⁄16")



Contrast Stud

ø30mm (1¾") Inclusive Length 17mm (11⁄16")
 ø38mm (1½") Inclusive Length 20mm (13⁄16")
 ø50mm (2") Inclusive Length 23mm (7⁄8")



Ball

ø30mm (1¾") Inclusive Length 52mm (21⁄16")
 ø38mm (1½") Inclusive Length 65mm (27⁄16")
 ø50mm (2") Inclusive Length 86mm (33⁄8")



Pebble

ø30mm (1¾") Inclusive Length 37mm (17⁄16")
 ø38mm (1½") Inclusive Length 54mm (27⁄16")
 ø50mm (2") Inclusive Length 70mm (27⁄16")



Large Disc

ø30mm (1¾") Inclusive Length 6mm (¼")
 ø38mm (1½") Inclusive Length 7mm (¼")
 ø50mm (2") Inclusive Length 8mm (5⁄16")



Crystal Ball

ø30mm (1¾") Inclusive Length 58mm (25⁄16")
 ø38mm (1½") Inclusive Length 69mm (211⁄16")
 ø50mm (2") Inclusive Length 88mm (3½")



Squat Disc

ø30mm (1¾") Inclusive Length 26mm (1")
 ø38mm (1½") Inclusive Length 37mm (17⁄16")
 ø50mm (2") Inclusive Length 48mm (17⁄8")

FINISHES

ADDITIONAL TO THOSE SHOWN ON PAGE 91

A brushed stainless steel base provides an edgy finish to Progressive Eclipse, with specially developed tints providing a change of mood to suit the needs of the project.




Brushed Stainless



Brass Tint⁺Ⓞ



Bronze Tint⁺Ⓞ



Carbon Tint⁺Ⓞ

+ A finishing charge will apply Ⓞ Longer lead-times will apply
 Due to printing limitations colours in this brochure may not be accurate
 Samples are available on request - www.bradleycollection.com/samples/

Ⓜ Please note that if this option is selected finials cannot be added at a later date.



FINIALS

CLASSIC

A subtle softness of hand is the signature of this edit. Classic rounded cues counterpoint a more contemporary streamlining of scale. These classic shapes are complemented by a palette of finishes developed to emphasise the intrinsic quality of mild steel.



Flush End Cap[‡] - Supplied as standard

- ø30mm (1 3/16") Inclusive Length 6mm (1/4")
- ø38mm (1 1/2") Inclusive Length 6mm (1/4")
- ø50mm (2") Inclusive Length 6mm (1/4")



Standard Stud

- ø30mm (1 3/16") Inclusive Length 8mm (5/16")
- ø38mm (1 1/2") Inclusive Length 9mm (9/16")
- ø50mm (2") Inclusive Length 10mm (3/8")



Large Stud

- ø30mm (1 3/16") Inclusive Length 8mm (5/16")
- ø38mm (1 1/2") Inclusive Length 9mm (9/16")
- ø50mm (2") Inclusive Length 10mm (3/8")



Button Stud

- ø30mm (1 3/16") Inclusive Length 44mm (1 11/16")
- ø38mm (1 1/2") Inclusive Length 58mm (2 2/16")
- ø50mm (2") Inclusive Length 69mm (2 11/16")



Ball & Collar


- ø30mm (1 3/16") Inclusive Length 54mm (2 1/8")
- ø38mm (1 1/2") Inclusive Length 65mm (2 5/16")
- ø50mm (2") Inclusive Length 86mm (3 3/8")

For full technical information, sizes and weights please download the specification guide - www.bradleycollection.com/specification-guides/

[‡] Please note that if this option is selected finials cannot be added at a later date.

FINISHES ADDITIONAL TO THOSE SHOWN ON PAGE 91

The beauty of the mild steel base of the Classic design group shines through with these special translucent finishes.



Polished Natural Steel Brass Toned Matte Brass Toned Oil Rubbed Waxed

Due to printing limitations colours in this brochure may not be accurate. Samples are available on request - www.bradleycollection.com/samples/

Pictured: ø38mm (1 1/2") Classic Coverpole • Standard Stud • Waxed

FINIALS

DECO

Traditional artisan materials of wood and brass are treated sympathetically but not reverentially in the Deco group. Traditional design cues are recognisable, while a shift of emphasis gives a fresher transitional feel, with some designs being unashamedly modern.

Hand drawn pole and ring versions of the Deco design group are available on request.



Pictured: ø50mm (1 7/8") Deco Wood Coverpole • Jacobean Oak • Squat Ball • Aged Brass

FINIALS DECO



Flush End Cap ~ - Supplied as standard
 ø50mm (2") Inclusive Length 8mm (5/16")



Contrast Stud
 ø50mm (2") Inclusive Length 23mm (7/8")



Wooden Contrast Stud
 ø50mm (2") Inclusive Length 23mm (7/8")



Flute
 ø50mm (2") Inclusive Length 103mm (4 1/16")



Squat Ball
 ø50mm (2") Inclusive Length 91mm (3 5/8")



Wooden Squat Ball
 ø50mm (2") Inclusive Length 91mm (3 5/8")



Templar
 ø50mm (2") Inclusive Length 122mm (4 13/16")



Crystal Templar
 ø50mm (2") Inclusive Length 122mm (4 13/16")




Wooden Templar
 ø50mm (2") Inclusive Length 122mm (4 13/16")



Discus
 ø50mm (2") Inclusive Length 9mm (3/8")




Ribbed Sphere
 ø50mm (2") Inclusive Length 127mm (5")



Wooden Ribbed Sphere
 ø50mm (2") Inclusive Length 127mm (5")

FINISHES ADDITIONAL TO THOSE SHOWN ON PAGE 91

The textures and natural colours of wood and brass are inherently pleasing, so they are enhanced by subtle treatments, which allow the natural properties of the material to speak.



Aged Brass*



Waxed Brass



Polished Brass*

* Brass finishes are supplied unlacquered and will tarnish over time a clear lacquer may be applied on request as a custom finish

Finial & bracket finishes only




Polished Nickel+Ⓢ

+ A finishing charge will apply Ⓢ Longer lead-times will apply

Wood coverpole & finial finishes only

Other wood stained finishes are available on request.




Aged Oak
 Stain Over Ash



Jacobean Oak
 Stain Over Ash




Mahogany
 Stain Over Ash





Ebony
 Stain Over Ash



BRACKETS

Single Brackets


Side	Diameter	Projection from wall to track centre	Fixing plate size
	ø30mm (1 3/16") ø38mm (1 1/2") ø50mm (2")	100mm (4") 100mm (4") 100mm (4")	w34mm (1 3/16") x H70mm (2 3/4") w52mm (2 1/16") x H104mm (4 1/8") w52mm (2 1/16") x H104mm (4 1/8")

Mid	Mid - Joining	Diameter	Projection from wall to track centre	Fixing plate size
		ø30mm (1 3/16") ø38mm (1 1/2") ø50mm (2")	100mm (4") 100mm (4") 100mm (4")	w70mm (2 3/4") x H34mm (1 3/16") w104mm (4 1/8") x H52mm (2 1/16") w104mm (4 1/8") x H52mm (2 1/16")

Ceiling Brackets

Flush	Flush - Joining	Diameter	Drop from ceiling to top of pole	Fixing plate size
		ø30mm (1 3/16") ø38mm (1 1/2") ø50mm (2")	3mm (1/8") 3mm (1/8") 3mm (1/8")	w70mm (2 3/4") x H34mm (1 3/16") w70mm (2 3/4") x H34mm (1 3/16") w70mm (2 3/4") x H34mm (1 3/16")

Double Brackets

Side	Diameter	Projection from wall to track centre	Fixing plate size
	Fø38mm (1 1/2") Bø30mm (1 3/16") Fø50mm (2") Bø38mm (1 1/2")	F160mm (6 5/16") B 60mm (2 3/8") F160mm (6 5/16") B 60mm (2 3/8")	w52mm (2 1/16") x H104mm (4 1/8") w52mm (2 1/16") x H104mm (4 1/8")

Mid	Mid - Joining	Diameter	Projection from wall to track centre	Fixing plate size
		Fø38mm (1 1/2") Bø30mm (1 3/16") Fø50mm (2") Bø38mm (1 1/2")	F160mm (6 5/16") B 60mm (2 3/8") F160mm (6 5/16") B 60mm (2 3/8")	w104mm (4 1/8") x H52mm (2 1/16") w104mm (4 1/8") x H52mm (2 1/16")

ELECTRIC OPTIONS



Silent Gliss 5100

Ø38mm (1 1/2") • 50mm (2")

Straight poles maximum length 5 Metres (16.5ft)[⌘]
 Standard rollers and Wave® gliders
 AC hidden motor options
 Touch and go manual operation
 System allows manual operation during power failure
 Quiet motors, noise level at 300mm (1') <36dBA
 Wireless remote controls
 No pre-wiring necessary

Silent Gliss 5600

Ø30mm (1 3/16") • 38mm (1 1/2") • 50mm (2")

Straight poles maximum length 15 Metres (49ft)[⌘]
 Bespoke bay service
 Standard gliders and rollers & Wave® gliders and rollers
 DC & AC hidden motor options
 Touch and go manual operation
 System allows manual operation during power failure
 Quiet motors, noise level at 300mm (1') <36dBA
 Wireless remote control, app control or home automation integration



Somfy

Ø38mm (1 1/2") • 50mm (2")

Straight poles maximum length 12 Metres (39ft)[⌘]
 Standard roller and Ripple rollers
 Mains & Battery concealed motor options
 Touch and go manual operation
 System allows manual operation during power failure
 Quiet motors, noise level at 1000mm (3') <44dBA
 Fully compatible with Somfy RTS
 Wireless remote control, app control or home automation integration



Lutron

Ø38mm (1 1/2") • 50mm (2")

Straight poles maximum length 9.0 Metres (29.5ft)[⌘]
 Bespoke bay service
 Standard roller and Ripplefold® rollers
 Low voltage concealed motors
 Three motor ratings for differing curtain weights
 Quiet motors, noise level at 1000mm (3') <44dBA
 Fully compatible with Lutron® QS Home Automation systems
 Wireless remote control, app control or home automation integration

SILENT GLISS® 5100

Poles

Poles are cut to suit individual requirements. When calculating the length of your pole, remember to allow tolerance beyond the width of the frame for the curtains to stack back to the edge of the window.

Maximum Coverpole length in one piece 2.9m (114")*. Poles exceeding the maximum length will be cut into equal parts unless otherwise specified. A joining bracket will need to be specified.

Size	Maximum distance between brackets	Minimum bend radius
∅38mm (1 1/2")	1500mm (60")	n/a
∅50mm	1500mm (60")	n/a

*Lengths over 2.4m (96") will incur a handling charge

Motor options

5090 Motor



Mains powered motor with integrated radio receiver for use with remote control options. Supplied with plug and 5m of cable. Suitable for systems up to 5M (16.5ft)

Control options

Wall Switch



Single & Multi-channel wall mounted remote control options available.

Remote Control



Single & Multi-channel hand held remote control options available.

Wall Timer



Single & Multi-channel wall mounted options available.


Gliding Options

Rollers



Drop from bottom of track: 20mm (13/16")

Wave® gliders



Drop from bottom of track: 20mm (13/16")
Wave® Pitch: 80mm (3 1/8")

* Supplied in sections - maximum section length 2.9m (9.5ft)
Weight restrictions apply. For full technical information please refer to the specification guide. www.bradleycollection.com/specification-guides/

SILENT GLISS® 5600

Poles

Poles are cut and bent to suit individual requirements. When calculating the length of your pole, remember to allow tolerance beyond the width of the frame for the curtains to stack back to the edge of the window.

Maximum Coverpole length in one piece 2.9m (114")*. Poles exceeding the maximum length will be cut into equal parts unless otherwise specified. A joining bracket will need to be specified.

Size	Maximum distance between brackets	Minimum bend radius
∅30mm (1 3/16")	1500mm (60")	n/a
∅38mm (1 1/2")	1500mm (60")	R275mm (10 13/16")
∅50mm	1500mm (60")	R275mm (10 13/16")

*Lengths over 2.4m (96") will incur a handling charge

Motor options

9060 Motor



Mains powered motor. Requires professional installation. Suitable for systems up to 15M (49ft)

9060 Motor with radio module



Mains powered motor, with radio module for use with remote control options. Requires professional installation. Suitable for systems up to 15M (49ft)

Smart Expansion Module[§] also available

Control options

Remote Control



Single & Multi-channel hand held remote control options available.

App Control Move & Smart



The system can be controlled with the Silent Gliss Move[«] app allow control on smart devices. Or via the Smart[§] system allowing integration with all major home control systems

Gliding Options

Gliders



Drop from bottom of track: 20mm (13/16")

Rollers*



Drop from bottom of track: 20mm (13/16")

Wave® gliders



Drop from bottom of track: 20mm (13/16")
Wave® Pitch: 80mm (3 1/8")

Wave® rollers*



Drop from bottom of track: 20mm (13/16")
Wave® Pitch: 80mm (3 1/8")


* Supplied in sections - maximum section length 2.9m (9.5ft) * Supplied as standard on systems over 2.9m (9.5ft) with single stack curtains
« Move server set 9960 is required for use with this app § Smart only available in United Kingdom, requires Smart Expansion Module
Weight restrictions apply. For full technical information please refer to the specification guide. www.bradleycollection.com/specification-guides/

SOMFY® GLYDEA & IRISMO

Poles

Poles are cut to suit individual requirements. When calculating the length of your pole, remember to allow tolerance beyond the width of the frame for the curtains to stack back to the edge of the window.

Maximum Coverpole length in one piece 2.9m (114")*. Poles exceeding the maximum length will be cut into equal parts unless otherwise specified. A joining bracket will need to be specified.



Size	Maximum distance between brackets	Minimum bend radius
∅38mm (1 1/2")	1500mm (60")	n/a
∅50mm	1500mm (60")	n/a

*Lengths over 2.4m (96") will incur a handling charge

Motor options

Glydea



Mains powered motor, with integrated radio receiver for use with remote control options. Requires professional installation. Suitable for systems up to 12M (39ft).

Irismo



Battery powered motor, with integrated radio receiver for use with remote control options. Single charge lasts up to six months. Requires no pre-wiring. Suitable for systems up to 10M (33ft).

Control options

Remote Control



Single channel wall switch & Multi-channel hand held remote control options available.

App Control Tahoma & Automation systems



The system can be controlled with the Somfy Tahoma app or through smart devices & Amazon Alexa. The system can also be intergrated with all major home control systems.

Gliding Options

Rollers



Drop from bottom of track:
20mm (13/16")

Ripple rollers



Drop from bottom of track:
20mm (13/16")
Ripple Pitch:
80mm (3 1/8")


* Supplied in sections - maximum section length 2.9m (9.5ft)
Weight restrictions apply. For full technical information please refer to the specification guide. www.bradleycollection.com/specification-guides/

LUTRON® SIVOIA

Poles

Poles are cut and bent to suit individual requirements. When calculating the length of your pole, remember to allow tolerance beyond the width of the frame for the curtains to stack back to the edge of the window.

Maximum Coverpole length in one piece 2.9m (114")*. Poles exceeding the maximum length will be cut into equal parts unless otherwise specified. A joining bracket will need to be specified.



Size	Maximum distance between brackets	Minimum bend radius
∅38mm (1 1/2")	1500mm (60")	R275mm (10 13/16")
∅50mm	1500mm (60")	R275mm (10 13/16")

Motor options

Motor



Three mains powered motor options available D105 • D145 • D175 Requires professional installation. Suitable for systems up to 15M (49ft)


Motor with radio dongle



Three mains powered motor options available D105 • D145 • D175, with radio dongle for use with remote control options. Requires professional installation. Suitable for systems up to 15M (49ft)

Control options

Remote Control



Single & Multi-channel hand held remote control options available.

App Control RA2 Select Hub & Automation systems



The system can be controlled with the Lutron app or through smart devices & Amazon Alexa. The system can also be intergrated with all major home control systems.

Gliding Options

Rollers



Drop from bottom of track:
12mm (7/16")

Ripplefold® rollers



Drop from bottom of track:
20mm (13/16")
Ripplefold® Fullness:
80% • 100% • 120%

* Supplied in sections - maximum section length 2.9m (9.5ft)
Weight restrictions apply. For full technical information please refer to the specification guide. www.bradleycollection.com/specification-guides/