



Web www.bradleycollection.com

Email info@bradleycollection.com

Follow us on     

Visit us The Silk Gallery • Ground Floor • Centre Dome • Design Centre - Chelsea Harbour
Lots Road • London • SW10 0XE
Telephone +44 (0)20 7351 1790

World

The Bradley Collection Ltd • Lion Barn • Maitland Road • Needham Market • Suffolk • IP6 8NS • UK
Telephone +44 (0)1449 722 724 Fax +44 (0)1449 722 728

USA & Canada

The Bradley Collection Inc. • 3625 Hayden Avenue, #E • Culver City • CA • 90232 • USA
Telephone +1 (310) 815 8255 Fax +1 (310) 815 9255

Specialised fixings for mounting brackets will be required in certain situations and are not provided as standard.
Steel items are not recommended for damp conditions such as shower rooms. • Crystal finials should not be positioned in direct sunlight.

The Bradley Collection reserves the right to modify design and materials without prior notice as part of a process of continual product improvement.

Products are protected by Design Rights, under provisions of Copyright, Designs & Patents Act 1988.

Bradley®, The Bradley Collection® and  Logo are registered Community trademarks of The Bradley Collection Ltd. in Europe and registered trademarks of the Bradley Collection, Inc. in the USA.

the**bradley**collection

EDITION SIX
STAINLESS



Pictured - ø50mm (2") Pole - Stud - Brushed Stainless
Interior design by Bayon Design Studio Inc - California - USA

STAINLESS

The modernist stainless collection is a perfect example of form following function. the design language is pure and simple, with sharp linear forms resulting from the machining process.

The brushed and mirrored surface finishes, combined with subtle tinting technology emphasise the innate qualities of the high grade stainless steel used throughout.

REFINED AND RESILIENT

High grade stainless steel in this collection works for wet rooms, coastal settings and outdoors.

Pictured - ø38mm (1½") Pole • Squat Disc • Brushed Carbon Tint
Shown with: Lewis & Wood - Skittery Linen



Pictured - ø25mm (1") Pole • Octagon Stud • Brushed Brass Tint
Shown with: Lewis & Wood - Linen Taffeta

IN DETAIL

Pole diameters - Ø19mm (¾") • 25mm (1") • 38mm (1½") • 50mm (2")

- Unlimited system length ◊
- Easy install, drop-in brackets with magnetic cover plate
- Lined rings in stainless steel on all diameters
- Passing system
- Bespoke bending and curving service
- Can be specified for wet room/outdoor use



Ceiling brackets



Double brackets



Passing system




Drapery arm
See page 74



Custom bending

◊ Supplied in sections - Maximum section per length 2.4m (94")

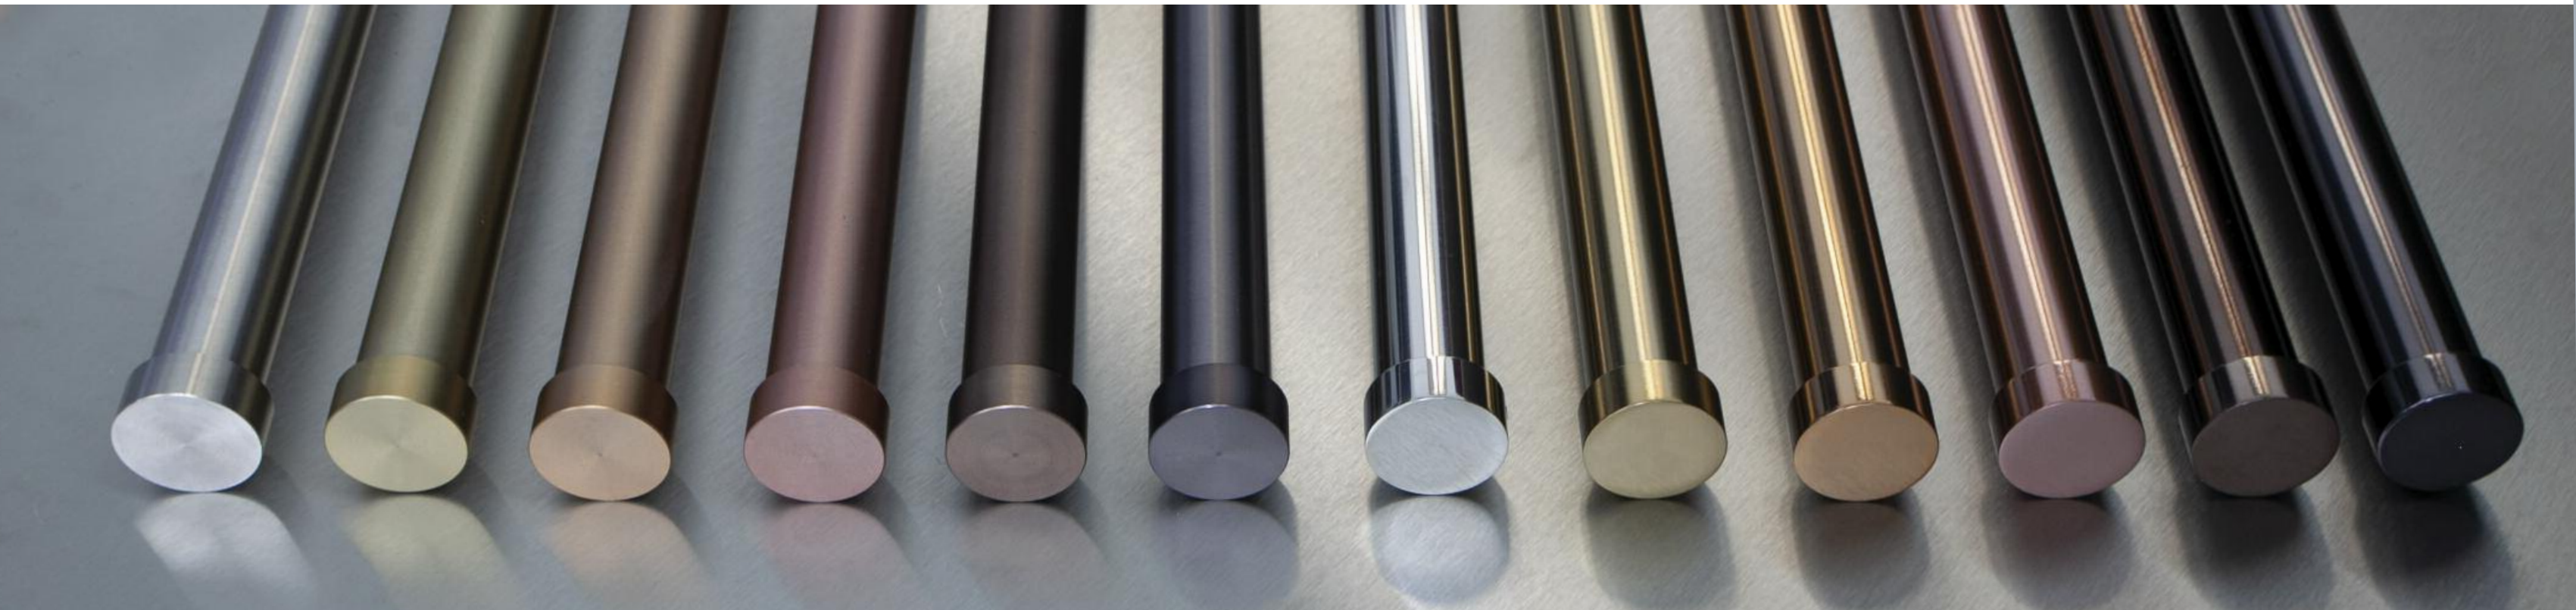

FINISHES

The renowned qualities of authentic stainless steel are emphasised by either a brushed or polished surface treatment, while a unique tinting process brings exciting new opportunities for modern design schemes.



Brushed Stainless



Brushed Brass Tint[Ⓢ]



Brushed Copper Tint[Ⓢ]



Brushed Rose Tint[Ⓢ]



Brushed Bronze Tint[Ⓢ]



Brushed Carbon Tint[Ⓢ]



Mirrored Stainless[Ⓢ]



Mirrored Brass Tint[Ⓢ]



Mirrored Copper Tint[Ⓢ]



Mirrored Rose Tint[Ⓢ]



Mirrored Bronze Tint[Ⓢ]



Mirrored Carbon Tint[Ⓢ]

Pictured left to right - ø25mm (1") • Stud • Brushed Stainless • Brushed Brass Tint • Brushed Copper Tint • Brushed Rose Tint • Brushed Bronze Tint • Brushed Carbon Tint • Mirrored Stainless • Mirrored Brass Tint • Mirrored Copper Tint • Mirrored Rose Tint • Mirrored Bronze Tint • Mirrored Carbon Tint

Due to printing limitations colours in this brochure may not be accurate. Samples are available on request - www.bradleycollection.com/samples/

Ⓢ Longer lead-times will apply

FINIALS

Modern, linear forms presented in brushed and mirrored finishes.



Pictured left to right - \varnothing 25mm (1") • Disc • Brushed Stainless • Octagon Stud • Brushed Carbon Tint
 Knurled Stud • Brushed Brass Tint • Large Disc • Brushed Copper Tint • Faceted Disc • Mirrored Stainless
 Ball • Brushed Bronze Tint • Squat Disc • Mirrored Brass Tint • Stud • Brushed Rose Tint



Stud

- \varnothing 19mm ($\frac{3}{4}$ ") Inclusive Length 2mm ($\frac{1}{16}$ ")
- \varnothing 25mm (1") Inclusive Length 3mm ($\frac{3}{8}$ ")
- \varnothing 38mm (1 $\frac{1}{2}$ ") Inclusive Length 3mm ($\frac{3}{8}$ ")
- \varnothing 50mm (2") Inclusive Length 4mm ($\frac{3}{16}$ ")



Knurled Stud

- \varnothing 19mm ($\frac{3}{4}$ ") Inclusive Length 5mm ($\frac{3}{16}$ ")
- \varnothing 25mm (1") Inclusive Length 7mm ($\frac{1}{4}$ ")
- \varnothing 38mm (1 $\frac{1}{2}$ ") Inclusive Length 7mm ($\frac{1}{4}$ ")
- \varnothing 50mm (2") Inclusive Length 9mm ($\frac{3}{8}$ ")



Octagon Stud

- \varnothing 19mm ($\frac{3}{4}$ ") Inclusive Length 7mm ($\frac{1}{4}$ ")
- \varnothing 25mm (1") Inclusive Length 10mm ($\frac{3}{8}$ ")
- \varnothing 38mm (1 $\frac{1}{2}$ ") Inclusive Length 11mm ($\frac{7}{16}$ ")
- \varnothing 50mm (2") Inclusive Length 14mm ($\frac{9}{16}$ ")



Squat Disc

- \varnothing 19mm ($\frac{3}{4}$ ") Inclusive Length 17mm ($\frac{11}{16}$ ")
- \varnothing 25mm (1") Inclusive Length 23mm ($\frac{7}{8}$ ")
- \varnothing 38mm (1 $\frac{1}{2}$ ") Inclusive Length 33mm (1 $\frac{5}{16}$ ")
- \varnothing 50mm (2") Inclusive Length 44mm (1 $\frac{3}{4}$ ")



Disc

- \varnothing 19mm ($\frac{3}{4}$ ") Inclusive Length 2mm ($\frac{1}{16}$ ")
- \varnothing 25mm (1") Inclusive Length 3mm ($\frac{3}{8}$ ")
- \varnothing 38mm (1 $\frac{1}{2}$ ") Inclusive Length 3mm ($\frac{3}{8}$ ")
- \varnothing 50mm (2") Inclusive Length 4mm ($\frac{3}{16}$ ")



Large Disc

- \varnothing 19mm ($\frac{3}{4}$ ") Inclusive Length 4mm ($\frac{3}{16}$ ")
- \varnothing 25mm (1") Inclusive Length 4mm ($\frac{3}{16}$ ")
- \varnothing 38mm (1 $\frac{1}{2}$ ") Inclusive Length 6mm ($\frac{1}{4}$ ")
- \varnothing 50mm (2") Inclusive Length 6mm ($\frac{1}{4}$ ")



Faceted Disc

- \varnothing 19mm ($\frac{3}{4}$ ") Inclusive Length 21mm (1 $\frac{3}{16}$ ")
- \varnothing 25mm (1") Inclusive Length 28mm (1 $\frac{1}{8}$ ")
- \varnothing 38mm (1 $\frac{1}{2}$ ") Inclusive Length 41mm (1 $\frac{5}{8}$ ")
- \varnothing 50mm (2") Inclusive Length 54mm (2 $\frac{1}{8}$ ")







Ball



- \varnothing 19mm ($\frac{3}{4}$ ") Inclusive Length 50mm (2")
- \varnothing 25mm (1") Inclusive Length 63mm (2 $\frac{1}{2}$ ")
- \varnothing 38mm (1 $\frac{1}{2}$ ") Inclusive Length 83mm (3 $\frac{1}{4}$ ")
- \varnothing 50mm (2") Inclusive Length 104mm (4 $\frac{1}{16}$ ")

BRACKETS




Single Brackets

Side 	Diameter ø19mm (3/4") ø25mm (1") ø38mm (1 1/2") ø50mm (2")	Projection from wall to pole centre 60mm (2 3/8"), 100mm (4") 60mm (2 3/8"), 100mm (4") 100mm (4") 100mm (4")	Fixing plate size w34mm (1 5/16") x h70mm (2 3/4") w34mm (1 5/16") x h70mm (2 3/4") w52mm (2 1/8") x h104mm (4 1/8") w52mm (2 1/8") x h104mm (4 1/8")
Mid 	Diameter ø19mm (3/4") ø25mm (1") ø38mm (1 1/2") ø50mm (2")	Projection from wall to pole centre 60mm (2 3/8"), 100mm (4") 60mm (2 3/8"), 100mm (4") 100mm (4") 100mm (4")	Fixing plate size w70mm (2 3/4") x h34mm (1 5/16") w70mm (2 3/4") x h34mm (1 5/16") w104mm (4 1/8") x h52mm (2 1/8") w104mm (4 1/8") x h52mm (2 1/8")
Passing 	Diameter ø19mm (3/4") ø25mm (1") ø38mm (1 1/2") ø50mm (2")	Projection from wall to pole centre 60mm (2 3/8"), 100mm (4") 60mm (2 3/8"), 100mm (4") 100mm (4") 100mm (4")	Fixing plate size w70mm (2 3/4") x h34mm (1 5/16") w70mm (2 3/4") x h34mm (1 5/16") w104mm (4 1/8") x h52mm (2 1/8") w104mm (4 1/8") x h52mm (2 1/8")
Recess with ring stop 	Diameter ø19mm (3/4") ø25mm (1") ø38mm (1 1/2") ø50mm (2")	Depth off wall 7mm (1/4") 8mm (5/16") 12mm (1/2") 15mm (9/16")	Fixing plate size ø26mm (1") ø34mm (1 5/16") ø49mm (1 15/16") ø64mm (2 1/2")



Ceiling Brackets

Ceiling 	Diameter ø19mm (3/4") ø25mm (1") ø38mm (1 1/2") ø50mm (2")	Drop from ceiling to pole centre 60mm (2 3/8"), 100mm (4") 60mm (2 3/8"), 100mm (4") 100mm (4") 100mm (4")	Fixing plate size w70mm (2 3/4") x h34mm (1 5/16") w70mm (2 3/4") x h34mm (1 5/16") w104mm (4 1/8") x h52mm (2 1/8") w104mm (4 1/8") x h52mm (2 1/8")
Passing 	Diameter ø19mm (3/4") ø25mm (1") ø38mm (1 1/2") ø50mm (2")	Drop from ceiling to pole centre 60mm (2 3/8"), 100mm (4") 60mm (2 3/8"), 100mm (4") 100mm (4") 100mm (4")	Fixing plate size w70mm (2 3/4") x h34mm (1 5/16") w70mm (2 3/4") x h34mm (1 5/16") w104mm (4 1/8") x h52mm (2 1/8") w104mm (4 1/8") x h52mm (2 1/8")

Double Brackets

Side 	Diameter Fø25mm (1") Bø19mm (3/4") Fø50mm (2") Bø25mm (1")	Projection from wall to pole centre F160mm (6 5/16") B60mm (2 3/8") F200mm (8") B60mm (2 3/8")	Fixing plate size w34mm (1 5/16") x h70mm (2 3/4") w52mm (2 1/8") x h104mm (4 1/8")
Mid 	Diameter Fø25mm (1") Bø19mm (3/4") Fø50mm (2") Bø25mm (1")	Projection from wall to pole centre F160mm (6 5/16") B60mm (2 3/8") F200mm (8") B60mm (2 3/8")	Fixing plate size w70mm (2 3/4") x h34mm (1 5/16") w104mm (4 1/8") x h52mm (2 1/8")
Passing 	Diameter Fø25mm (1") Bø19mm (3/4") Fø50mm (2") Bø25mm (1")	Projection from wall to pole centre F160mm (6 5/16") B60mm (2 3/8") F200mm (8") B60mm (2 3/8")	Fixing plate size w72mm (2 13/16") x h59mm (2 5/16") w52mm (2 1/8") x h104mm (4 1/8")

Adjustable Brackets

Side 	Diameter ø19mm (3/4") ø25mm (1") ø38mm (1 1/2") ø50mm (2")	Projection from wall to pole centre Min.60mm (2 3/8") Max.170mm (6 11/16") Min.60mm (2 3/8") Max.170mm (6 11/16") Min.100mm (4") Max.170mm (6 11/16") Min.100mm (4") Max.170mm (6 11/16")	Fixing plate size w34mm (1 5/16") x h70mm (2 3/4") w34mm (1 5/16") x h70mm (2 3/4") w52mm (2 1/8") x h104mm (4 1/8") w52mm (2 1/8") x h104mm (4 1/8")
Passing 	Diameter ø19mm (3/4") ø25mm (1") ø38mm (1 1/2") ø50mm (2")	Projection from wall to pole centre Min.60mm (2 3/8") Max.170mm (6 11/16") Min.60mm (2 3/8") Max.170mm (6 11/16") Min.100mm (4") Max.170mm (6 11/16") Min.100mm (4") Max.170mm (6 11/16")	Fixing plate size w34mm (1 5/16") x h70mm (2 3/4") w34mm (1 5/16") x h70mm (2 3/4") w52mm (2 1/8") x h104mm (4 1/8") w52mm (2 1/8") x h104mm (4 1/8")

Drapery Arm Drapery arms have been designed to work at dormer windows, doorways & above beds

	Diameter ø25mm (1")	Fixing plate size w34mm (1 5/16") x h156mm (6 1/8")
---	-------------------------------	---

RINGS, POLES & ACCESSORIES

Lined Rings

Ring	Diameter	Ring drop from top of pole to bottom of ringlet
	ø19mm (3/4")	47mm (1 7/8")
	ø25mm (1")	55mm (2 1/8")
	ø38mm (1 1/2")	66mm (2 5/8")
	ø50mm (2")	80mm (3 1/8")


Passing Ring	Diameter	Ring drop from top of pole to bottom of ringlet
	ø19mm (3/4")	47mm (1 7/8")
	ø25mm (1")	55mm (2 1/8")
	ø38mm (1 1/2")	66mm (2 5/8")
	ø50mm (2")	80mm (3 1/8")



Poles

Poles are cut, bent and curved to suit individual requirements. When calculating the length of your pole, remember to allow tolerance beyond the width of the frame for the curtains to draw back to the edge of the window.

Maximum pole length in one piece 2.4m (96"). Poles exceeding the recommended maximum distance between brackets, will be cut into equal parts unless otherwise specified. Pole joiners will be supplied.

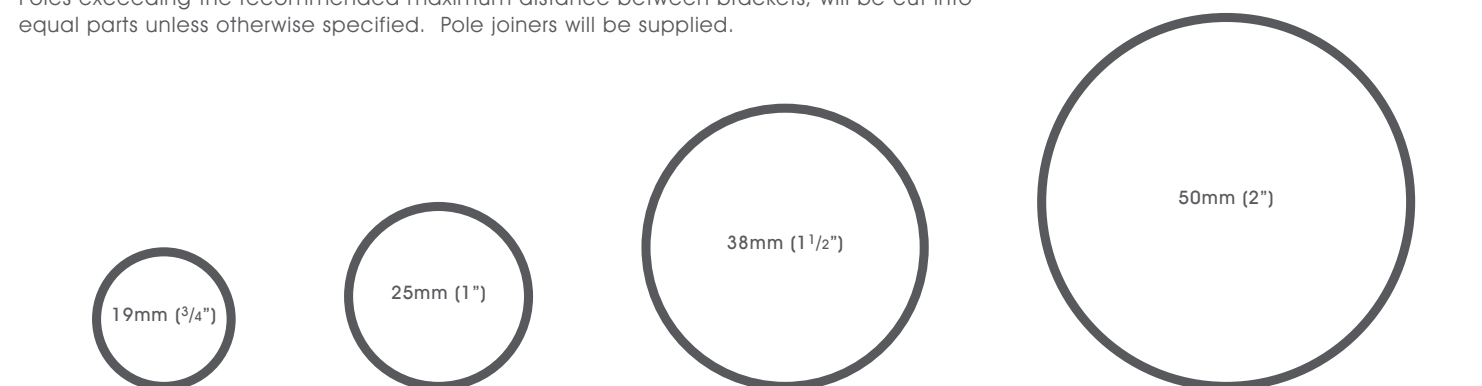

Diameter	Recommended maximum distance between brackets	Recommended curtain type for pole diameter	Minimum bend radius
ø19mm (3/4")	1800mm (71")	Light to medium weight, lined & non interlined curtains	R75mm (3")
ø25mm (1")	2000mm (79")	Medium weight, lined & interlined curtains	R100mm (4")
ø38mm (1 1/2")	2200mm (87")	Medium to heavy weight, lined & interlined curtains	R255mm (10")
ø50mm (2")	2400mm (96")	Heavy weight interlined curtains	R255mm (10")

Ombres

Small



Internal projection from wall: 150mm (5 7/8")
Fixing plate size: ø19mm (3/4")

Large



Internal projection from wall: 150mm (5 7/8")
Fixing plate size: ø25mm (1")

Hold back



Internal measurement: 137mm (5 3/8")
Fixing plate size: ø44mm (1 3/4")

Tie Back Hook



Projection: 29mm (1 1/8")
Fixing plate size: w25mm (1") x h74mm (2 15/16")

Draw Rods

Fine



Standard



Draw rod length: 1000mm (39 3/8")
Custom lengths available to order