

the**bradley**collection

---

EDITION SIX

# the**bradley**collection

## EDITION SIX

It is over 25 years since Priscilla Bradley first had the vision of elevating curtain hardware from the mundane to the status of high-end décor.

The Bradley Collection was born as a brand led by design and with a clear sense of purpose.

This dream of a perfect aesthetic has run in parallel with technical engineering excellence and an absolute commitment to quality, lending the brand rational as well as emotional appeal.

For more than a quarter of a century, The Bradley Collection has pursued its mission to create the world’s finest curtain poles.

### Contents

Welcome 01-06

Collections 07-08

Steel 09-26

Gliderpole® 27-48

Simple 49-62

Stainless 63-76

Eclipse 77-94

French 95-102

Elysian 103-116

Baroco 117-118

### Contact

Web [www.bradleycollection.com](http://www.bradleycollection.com) Email [info@bradleycollection.com](mailto:info@bradleycollection.com)

World +44 (0)1449 722 724 USA & Canada +1 (310) 815 8255

Follow     



# WELCOME

We are proud to present Edition Six of our "little black book", showcasing our collections & services for 2018/19.

There is much that is new this year with innovations in product design, finishing and bending technology.

Here are a few highlights...

*Pinella Bradley*



Image supplied by Alan Boswell Group

## FRESH & NEW

We love these new shapes; abstract, geometric but somehow easy to live with. We hope you love them just as much as we do...



## THERE IS NO PLANET B

Our products are made from steel & aluminium, the world's most recycled materials but now we are changing our packaging to virtually eliminate plastic.

Our new card & paper packaging is easier to open, still gives great protection and is 100% recyclable.






# COLOUR IS IN

Our extensive colour and finish palette appears to have hit the spot over the last year and it is rewarding to see so much colour going through our workshop.

We have therefore decided to go for continuity in the latest edition, with only minor improvements and enhancements to our finish offer.

Look out in particular for Flint being added to the finish line-up in the Steel Collection.

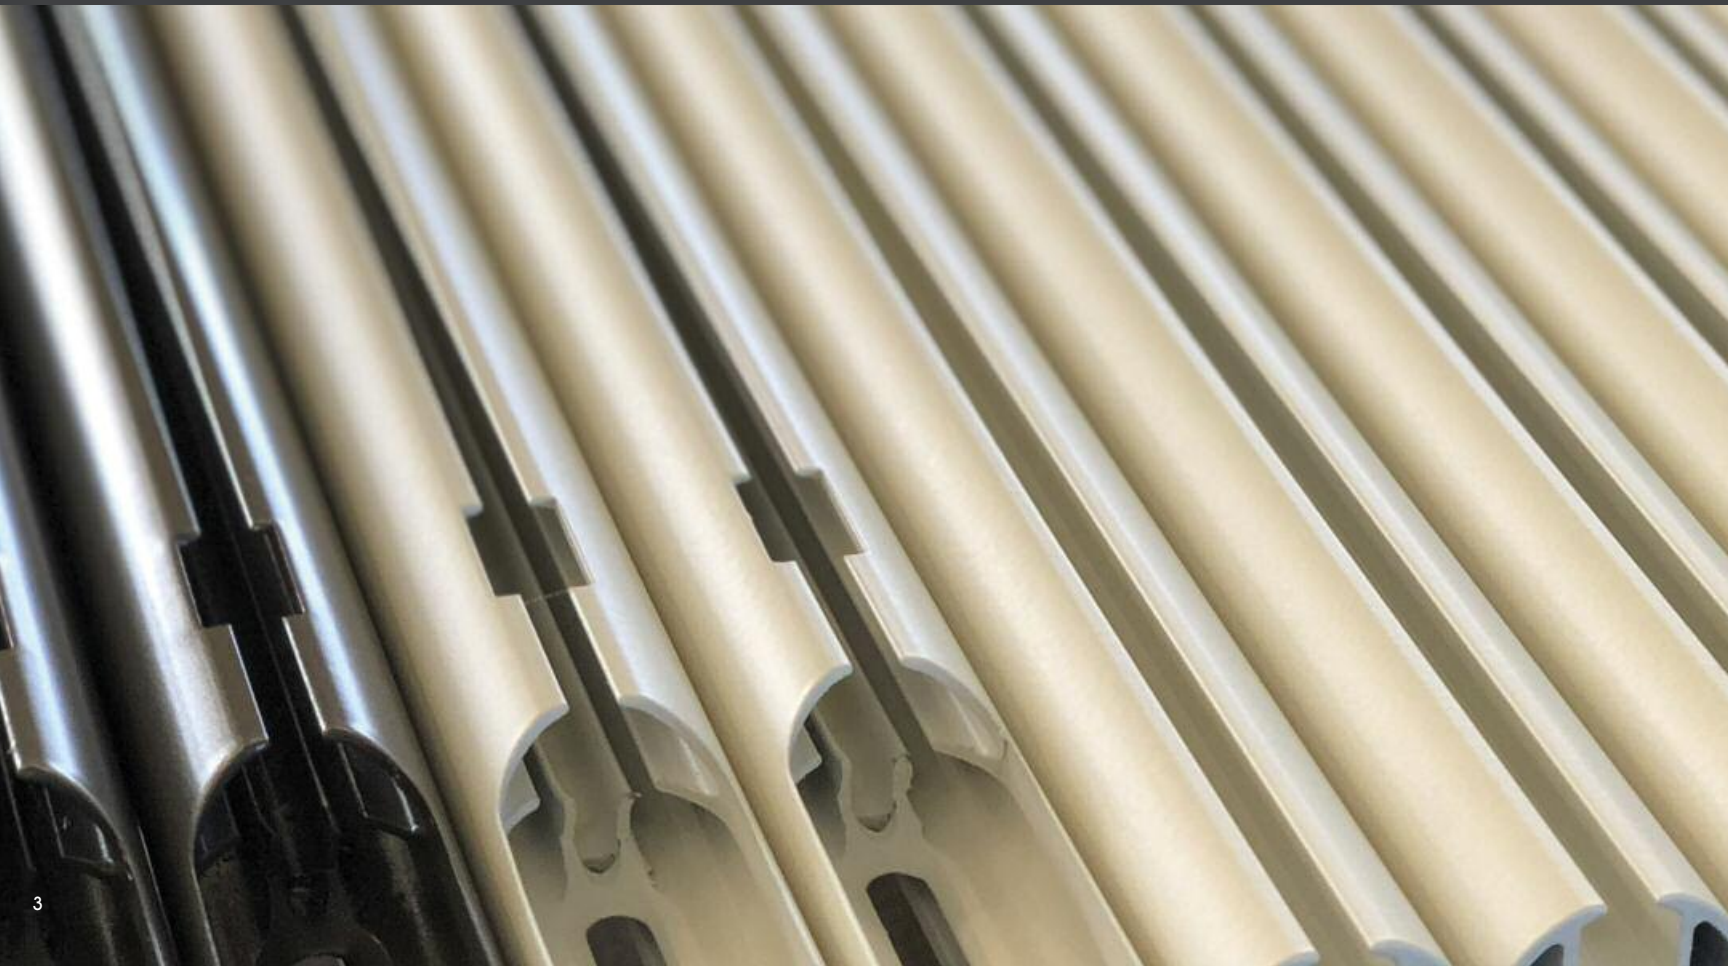

# BEST IN THE WORLD AT BENDING CURTAIN POLES

We aim to create the world's finest curtain poles, so we need unrivalled technical skills in bending poles. There's no substitute for experience but even our experts can benefit from improved tools for the job. This year sees a considerable investment in metal bending machinery to give in-house precision bending capabilities in all our metal poles. We hope you will notice the difference in precision and speed.







# INSPIRED BY YOU

There is no substitute for beautiful photography if you wish to really appreciate our current collections.

This edition of our 'little black book' goes big on inspiration and we are delighted this year to be featuring so much of our clients' work.

This inspired design by Arior Design features a clever fusion of Steel Collection pole with Elysian templar finials.

Pictured - Ø50mm (2") Pole • Templar • Flint  
Interior design by Arior Design - Brighton - UK

# EDITION SIX

---

## COLLECTIONS



STEEL  
09-26



GLIDERPOLE  
27-48



ECLIPSE  
77-94



FRENCH  
95-102



SIMPLE  
49-62



STAINLESS  
63-76



ELYSIAN  
103-116



BAROCO  
117-118





Pictured - Ø25mm (1") Pole® • Curling Leaf • Brass Toned  
Interior design by Jenny Junior Interiors - Hertfordshire - UK

## STEEL

A timeless classic from the Arts & Crafts tradition, this collection continues to delight.

Authentic materials crafted by artisans, with historical design cues re-imagined for contemporary living.





# A JOY FOREVER

Created to last a lifetime, the Steel Collection reassures with its purity, honesty and integrity.

Pictured - ø38mm (1½") Pole • Loop • Polished  
Window treatments by Bryant Furnishing - Bournemouth - UK





Pictured - Ø25mm (1") Pole • Flared Disc • Brass Toned  
 Interior design by Georgia Victoria - Edinburgh - UK

# IN DETAIL

A picture of elegance, the Steel Collection blends innovative design with quality craftsmanship, creating a visually stunning collection.

Pole diameters - Ø19mm (¾") • 25mm (1") • 38mm (1½") • 50mm (2")

- Unlimited system length◇
- Easy install, drop in brackets with optional magnetic cover plate
- Classic rings
- Passing system
- Bespoke bay service



Custom bending



Ceiling brackets



Double poles



Drapery arm  
 see page 24



Covered backplate option

◇ Supplied in sections - Maximum section length 4.0m (157") - Section lengths over 2.4m (94") will incur a handling charge



# FINISHES

The Steel Collection finishes have been created to enhance the intrinsic character of the steel material.

Pictured left to right - Ø25mm (1") Pole • Loop • Brass Toned • Ribbed Ball & Collar • Flint - Satin • Ball & Collar • Polished • Pebble • Waxed • Large Stud • Polished Copper Medium Stud • Bronzed • Standard Stud • Oil Rubbed



Waxed




Polished



Brass Toned



Polished Copper Tint



Bronzed



Oil Rubbed



Flint (Satin)

Due to printing limitations colours in this brochure may not be accurate  
Samples are available on request - [www.bradleycollection.com/samples/](http://www.bradleycollection.com/samples/)



# FINIALS

Simplicity is the watchword for this grouping of stud and disc designs.

Pictured left to right - ø25mm (1") • Medium Stud • Standard Stud • Large Stud • Hammered Stud • Polished



## Standard Stud

ø19mm (3/4") Inclusive Length 6mm (1/4")  
ø25mm (1") Inclusive Length 8mm (5/16")  
ø38mm (1 1/2") Inclusive Length 10mm (3/8")  
ø50mm (2") Inclusive Length 12mm (1/2")



## Medium Stud

ø19mm (3/4") Inclusive Length 6mm (1/4")  
ø25mm (1") Inclusive Length 8mm (5/16")  
ø38mm (1 1/2") Inclusive Length 10mm (3/8")  
ø50mm (2") Inclusive Length 12mm (1/2")



## Large Stud

ø19mm (3/4") Inclusive Length 6mm (1/4")  
ø25mm (1") Inclusive Length 8mm (5/16")  
ø38mm (1 1/2") Inclusive Length 10mm (3/8")  
ø50mm (2") Inclusive Length 12mm (1/2")



## Hammered Stud

ø19mm (3/4") Inclusive Length 10mm (3/8")  
ø25mm (1") Inclusive Length 12mm (1/2")  
ø38mm (1 1/2") Inclusive Length 16mm (5/8")  
ø50mm (2") Inclusive Length 20mm (13/16")



## Flared Stud

ø19mm (3/4") Inclusive Length 12mm (1/2")  
ø25mm (1") Inclusive Length 14mm (7/16")  
ø38mm (1 1/2") Inclusive Length 26mm (1")



## Flared Disc

ø19mm (3/4") Inclusive Length 17mm (11/16")  
ø25mm (1") Inclusive Length 21mm (7/8")  
ø38mm (1 1/2") Inclusive Length 34mm (1 5/16")



## Button Stud

ø19mm (3/4") Inclusive Length 26mm (1")  
ø25mm (1") Inclusive Length 40mm (1 9/16")  
ø38mm (1 1/2") Inclusive Length 59mm (2 5/16")  
ø50mm (2") Inclusive Length 69mm (2 11/16")



## Pebble

ø19mm (3/4") Inclusive Length 27mm (1 1/16")  
ø25mm (1") Inclusive Length 31mm (1 1/4")  
ø38mm (1 1/2") Inclusive Length 48mm (1 7/8")



# FINIALS

Pure, simple shapes and subtle hand-forged elements define this design group.



Pictured left to right - ø25mm (1") • Ball & Collar • Hammered Ball & Collar • Ball & Claw • Brass Toned



## Forged Disc

ø19mm (3/4") Inclusive Length 2mm (1/16")  
 ø25mm (1") Inclusive Length 3mm (3/16")  
 ø38mm (1 1/2") Inclusive Length 3mm (3/16")  
 ø50mm (2") Inclusive Length 4mm (3/16")



## Ball & Collar

ø19mm (3/4") Inclusive Length 55mm (2 3/16")  
 ø25mm (1") Inclusive Length 65mm (2 5/16")  
 ø38mm (1 1/2") Inclusive Length 75mm (2 5/16")  
 ø50mm (2") Inclusive Length 103mm (4 1/16")



## Hammered Ball & Collar

ø19mm (3/4") Inclusive Length 55mm (2 3/16")  
 ø25mm (1") Inclusive Length 65mm (2 5/16")



## Ribbed Ball & Collar

ø19mm (3/4") Inclusive Length 53mm (2 1/16")  
 ø25mm (1") Inclusive Length 60mm (2 3/8")



## Hammered Disc

ø19mm (3/4") Inclusive Length 2mm (1/16")  
 ø25mm (1") Inclusive Length 3mm (3/16")  
 ø38mm (1 1/2") Inclusive Length 3mm (3/16")  
 ø50mm (2") Inclusive Length 4mm (3/16")



## Crystal Ball & Collar<sup>✧</sup>

ø19mm (3/4") Inclusive Length 65mm (2 5/16")  
 ø25mm (1") Inclusive Length 75mm (2 5/16")  
 ø38mm (1 1/2") Inclusive Length 103mm (4 1/16")



## Ball & Claw

ø19mm (3/4") Inclusive Length 75mm (3")  
 ø25mm (1") Inclusive Length 90mm (3 5/16")  
 ø38mm (1 1/2") Inclusive Length 120mm (4 3/4")



## Twisted Knot

ø19mm (3/4") Inclusive Length 90mm (3 5/16")  
 ø25mm (1") Inclusive Length 95mm (3 3/4")  
 ø38mm (1 1/2") Inclusive Length 150mm (5 7/8")

Please note that due to manufacturing process's size and shape may vary slightly to images above ✧ Crystal finials should not be positioned in direct sunlight  
 For full technical information, sizes and weights please download the specification guide - [www.bradleycollection.com/specification-guides/](http://www.bradleycollection.com/specification-guides/)



# FINIALS

The true craft of the artisan is on display with these designs.

Pictured left to right - Ø25mm (1") • Tusk • Hammered • Spear • Curling Leaf • Jacobs Horn • Waxed



**Hammered Spear**

Ø19mm (3/4") Inclusive Length 122mm (4 13/16")  
Ø25mm (1") Inclusive Length 150mm (5 7/8")




**Double Ball Basket**

Ø19mm (3/4") Inclusive Length 142mm (5 5/16")  
Ø25mm (1") Inclusive Length 146mm (5 3/4")  
Ø38mm (1 1/2") Inclusive Length 205mm (8 1/16")



**Loop**

Ø19mm (3/4") Inclusive Length 115mm (4 1/2")  
Ø25mm (1") Inclusive Length 135mm (5 3/16")  
Ø38mm (1 1/2") Inclusive Length 180mm (7 1/16")

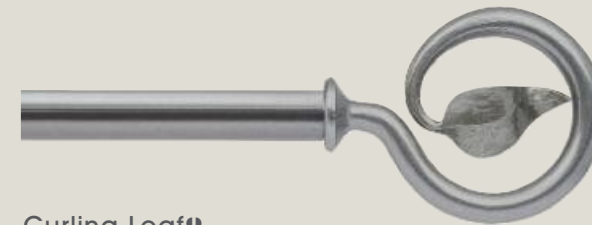

**Curling Leaf** 

Ø19mm (3/4") Inclusive Length 110mm (4 3/16")  
Ø25mm (1") Inclusive Length 140mm (5 1/2")  
Ø38mm (1 1/2") Inclusive Length 200mm (8")



**Tusk** 

Ø19mm (3/4") Inclusive Length 118mm (4 5/8")  
Ø25mm (1") Inclusive Length 141mm (5 5/16")



**Jacob's Horn** 

Ø19mm (3/4") Inclusive Length 105mm (4 1/8")  
Ø25mm (1") Inclusive Length 130mm (5 1/8")  
Ø38mm (1 1/2") Inclusive Length 180mm (7 1/16")



**Square Ram's Horn**

Ø19mm (3/4") Inclusive Length 120mm (4 3/4")  
Ø25mm (1") Inclusive Length 135mm (5 3/16")



**Reverse Square Ram's Horn** 

Ø19mm (3/4") Inclusive Length 55mm (2 3/16")  
Ø25mm (1") Inclusive Length 55mm (2 3/16")








Please note that due to manufacturing process's size and shape may vary slightly to images above  
For full technical information, sizes and weights please download the specification guide - [www.bradleycollection.com/specification-guides/](http://www.bradleycollection.com/specification-guides/)

 handed finial





BRACKETS







Single Brackets

Side	Covered Side	Diameter	Projection from wall to pole centre	Side Fixing plate size	Covered Side fixing plate size
		ø19mm (¾")	60mm (2⅜"), 100mm (4")	w20mm (1⅜") x H84mm (3⅝")	w24mm (1⅝") x H88mm (3⅞")
		ø25mm (1")	60mm (2⅜"), 100mm (4")	w25mm (1") x H102mm (4")	w29mm (1⅛") x H106mm (4⅜")
		ø38mm (1½")	100mm (4")	w30mm (1⅜") x H117mm (4⅝")	w34mm (1⅝") x H121mm (4¾")
		ø50mm (2")	100mm (4")	w30mm (1⅜") x H117mm (4⅝")	w34mm (1⅝") x H121mm (4¾")
Mid	Covered Mid	Diameter	Projection from wall to pole centre	Mid Fixing plate size	Covered Mid fixing plate size
		ø19mm (¾")	60mm (2⅜"), 100mm (4")	w55mm (2⅜") x H20mm (1⅜")	w59mm (2⅝") x H24mm (1⅝")
		ø25mm (1")	60mm (2⅜"), 100mm (4")	w60mm (2⅜") x H25mm (1")	w64mm (2½") x H29mm (1⅞")
		ø38mm (1½")	100mm (4")	w80mm (3⅞") x H30mm (1⅜")	w84mm (3⅝") x H34mm (1⅝")
		ø50mm (2")	100mm (4")	w80mm (3⅞") x H30mm (1⅜")	w84mm (3⅝") x H34mm (1⅝")
Passing	Covered Passing	Diameter	Projection from wall to pole centre	Passing Fixing plate size	Covered Passing fixing plate size
		ø19mm (¾")	60mm (2⅜"), 100mm (4")	w55mm (2⅜") x H20mm (1⅜")	w59mm (2⅝") x H24mm (1⅝")
		ø25mm (1")	60mm (2⅜"), 100mm (4")	w60mm (2⅜") x H25mm (1")	w64mm (2½") x H29mm (1⅞")
		ø38mm (1½")	100mm (4")	w80mm (3⅞") x H30mm (1⅜")	w84mm (3⅝") x H34mm (1⅝")
		ø50mm (2")	100mm (4")	w80mm (3⅞") x H30mm (1⅜")	w84mm (3⅝") x H34mm (1⅝")
Recess with ring stop		Diameter	Depth off wall	Fixing plate size	
		ø19mm (¾")	4mm (⅜")	ø42mm (1⅜")	
		ø25mm (1")	4mm (⅜")	ø50mm (2")	
		ø38mm (1½")	4mm (⅜")	ø72mm (2⅜")	
		ø50mm (2")	4mm (⅜")	ø72mm (2⅜")	

Ceiling Brackets

Ceiling	Diameter	Drop from ceiling to pole centre	Fixing plate size
	ø19mm (3/4")	60mm (2 3/8"), 100mm (4")	w55mm (2 3/16") x H20mm (1 3/16")
	ø25mm (1")	60mm (2 3/8"), 100mm (4")	w60mm (2 3/8") x H25mm (1")
	ø38mm (1 1/2")	100mm (4")	w80mm (3 1/8") x H30mm (1 3/16")
Passing	Diameter	Drop from ceiling to pole centre	Fixing plate size
	ø19mm (3/4")	60mm (2 3/8"), 100mm (4")	w55mm (2 3/16") x H20mm (1 3/16")
	ø25mm (1")	60mm (2 3/8"), 100mm (4")	w60mm (2 3/8") x H25mm (1")
	ø38mm (1 1/2")	100mm (4")	w80mm (3 1/8") x H30mm (1 3/16")

Double Brackets

Side			<b>Diameter</b> FØ25mm (1") BØ19mm (¾") FØ38mm (1½") BØ25mm (1")	<b>Projection from wall to pole centre</b> F160mm (6⅝") B60mm (2⅜") F160mm (6⅝") B60mm (2⅜")	<b>Fixing plate size</b> w25mm (1") x H102mm (4") w30mm (1⅜") x H117mm (4⅝")	
Mid			<b>Diameter</b> FØ25mm (1") BØ19mm (¾") FØ38mm (1½") BØ25mm (1")	<b>Projection from wall to pole centre</b> F160mm (6⅝") B60mm (2⅜") F160mm (6⅝") B60mm (2⅜")	<b>Fixing plate size</b> w60mm (2⅜") x H25mm (1") w80mm (3⅛") x H30mm (1⅜")	
Passing			<b>Diameter</b> FØ25mm (1") BØ19mm (¾") FØ38mm (1½") BØ25mm (1")	<b>Projection from wall to pole centre</b> F160mm (6⅝") B60mm (2⅜") F160mm (6⅝") B60mm (2⅜")	<b>Fixing plate size</b> w112mm (4⅞") x H50mm (2") w122mm (4⅞") x H60mm (2⅜")	
Adjustable Brackets						
Side			<b>Diameter</b> ø19mm (¾") ø25mm (1") ø38mm (1½")	<b>Projection from wall to pole centre</b> Min.65mm (2⅞") Max.150mm (5⅞") Min.75mm (2⅞") Max.175mm (6⅞") Min.95mm (3⅞") Max.200mm (7⅞")	<b>Fixing plate size</b> w20mm (⅞") x H84mm (3⅞") w25mm (1") x H102mm (4") w30mm (1⅞") x H117mm (4⅞")	
Mid	Passing			<b>Diameter</b> ø19mm (¾") ø25mm (1") ø38mm (1½")	<b>Projection from wall to pole centre</b> Min.65mm (2⅞") Max.150mm (5⅞") Min.75mm (2⅞") Max.175mm (6⅞") Min.95mm (3⅞") Max.200mm (7⅞")	<b>Fixing plate size</b> w55mm (2⅞") x H20mm (⅞") w60mm (2⅞") x H25mm (1") w80mm (3⅞") x H30mm (1⅞")

Drapery Arm drapery arms have been designed to work at dormer windrows, doorways & above beds

	Diameter	Fixing plate size
	ø25mm (1")	w30mm (1 3/16") x H185mm (7 1/4")



# RINGS, POLES & ACCESSORIES

## Classic Rings

Ring	Diameter	Ring drop from top of pole to bottom of ringlet
	ø19mm (3/4")	44mm (1 3/4")
	ø25mm (1")	49mm (1 5/16")
	ø38mm (1 1/2")	63mm (2 1/2")
	ø50mm (2")	82mm (3 1/4")

Passing Ring	Diameter	Ring drop from top of pole to bottom of ringlet
	ø19mm (3/4")	49mm (1 5/16")
	ø25mm (1")	54mm (2 1/8")
	ø38mm (1 1/2")	71mm (2 3/16")
	ø50mm (2")	89mm (3 1/2")



## Poles

Poles are cut, bent and curved to suit individual requirements.  
When calculating the length of your pole, remember to allow tolerance beyond the width of the frame for the curtains to draw back to the edge of the window.

Maximum pole length in one piece 4.0m (157")\*.  
Poles exceeding the recommended maximum distance between brackets, will be cut into equal parts unless otherwise specified. Pole joiners will be supplied.

Diameter	Recommended maximum distance between brackets	Recommended curtain type for pole diameter	Minimum bend radius
ø19mm (3/4")	1800mm (71")	Light to medium weight, lined & non interlined curtains	R75mm (3")
ø25mm (1")	2000mm (79")	Medium weight, lined & interlined curtains	R100mm (4")
ø38mm (1 1/2")	2200mm (87")	Medium to heavy weight, lined & interlined curtains	R255mm (10")
ø50mm (2")	2400mm (96")	Heavy weight interlined curtains	R255mm (10")

## Ombres

### Large Stud



Internal projection from wall: 125mm (4 15/16")  
Fixing plate size: ø60mm (2 3/8")


### Ball & Collar



Internal projection from wall: 125mm (4 15/16")  
Fixing plate size: ø60mm (2 3/8")

## Hold back

### Standard Stud



Internal measurement: 134mm (5 1/4")  
Fixing plate size: w20mm (1 3/16") x H56mm (2 3/16")

### Ball & Collar



## Tie Back Hook



Internal measurement: 27mm (1 1/16")  
Fixing plate size: w20mm (1 3/16") x H78mm (3 1/16")

## Draw Rods

### Standard Stud



### Ball & Collar



Draw rod length:  
1000mm (39 3/8")  
Custom lengths available to order





Pictured - Round Ø30mm (1 3/16") Gliderpole® - Corded - Wave® - Ball - Natural Silver  
Shown with: Ada & Ina - Vilgot Fabric

## GLIDERPOLE®

---

This sophisticated collection embraces simplicity of form,  
authentic materials and exceptional functionality.

Sharp, streamlined, minimal, modern.





Pictured - RoundØ50mm (1<sup>3</sup>/<sub>16</sub>" ) - RoundØ30mm (1<sup>3</sup>/<sub>16</sub>" ) Gliderpole® - Corded • Halo • Bone • Satin  
Interior design by Not So Gray Interiors - Surrey - UK





# IN DETAIL

Hand drawn	Flat pole dimension - H36mm (1 7/16")
	Round pole diameters - Ø30mm (1 3/16") • 50mm (2")
Corded	Round pole diameters - Ø30mm (1 3/16") • 50mm (2")
Electric	Round pole diameters - Ø50mm (2")

Hand drawn, corded & electric curtain control options  
 Bespoke bay service for hand drawn and corded gliderpoles  
 High strength brackets for minimal fixing points  
 Wall fixed brackets have magnetic bracket cover plates for concealed fixings  
 Flush & adjustable length ceiling brackets  
 Double gliderpole system  
 Standard and Wave® gliders and rollers



Inclusive end cap



Wave® curtain option



Bay bending & continuous curves



Brackets with magnetic cover



Recess fitting option



Double brackets



Flush ceiling brackets



Discreet cord retainer

Pictured - RoundØ50mm (1 3/16") - RoundØ30mm (1 3/16") Gliderpole® • Bone - Satin  
 Interior design by Not So Gray Interiors - Surrey - UK





Pictured from left to right -  
Flat H36mm (1 7/16") Gliderpole® - Hand Drawn • Flush Cap • Clay - Gloss  
Round ø30mm (1 1/16") Gliderpole® - Hand Drawn • Flush Cap • Millstone - Satin  
Round ø50mm (2") Gliderpole® - Hand Drawn • Flush Cap • Dove - Matte

# FINISHES

The following finishes are available on all gliderpoles and components. Coat options Matte (M) • Satin (S) • Gloss (G)



Cloud (M-S-G)



Ceramic (M-S-G)



Bone (M-S-G)



Cream (M-S-G)



Parchment (M-S-G)



Barley (M-S-G)



Dove (M-S-G)



Millstone (M-S-G)



Clay (M-S-G)



Cocoa (M-S-G)



Alabaster (M-S-G)



Dusk (M-S-G)



Granite (M-S-G)



Slate (M-S-G)



Flint (S-G)



Platinum (S-G)




Champagne (S-G)



Gold (S-G)



Cognac (S-G)



Gunmetal (S-G)



Bronzed



Natural Silver

## Gliderpole only finishes



Bright Aluminium ^

## Components only finishes



Polished Nickel+Ⓢ

Due to printing limitations colours in this brochure may not be accurate  
samples are available on request - [www.bradleycollection.com/samples/](http://www.bradleycollection.com/samples/)

M Matte finishes have a maximum section length of 2.4m (94")  
^ Not available on 50mm (2") poles

+ A finishing charge will apply  
Ⓢ Longer lead-times will apply





## FINIALS

This edit offers tight design integrity with minimalist intent.



### Flush End Cap - Included with system

Flat H36mm ( $1\frac{7}{16}"$ ) Inclusive Length 3mm ( $\frac{1}{8}"$ )

Round  $\varnothing 30\text{mm}$  ( $1\frac{3}{16}"$ ) Inclusive Length 3mm ( $\frac{1}{8}"$ )

Round  $\varnothing 50\text{mm}$  (2") Inclusive Length 3mm ( $\frac{1}{8}"$ )



### Stud

Round  $\varnothing 30\text{mm}$  ( $1\frac{3}{16}"$ ) Inclusive Length 12mm ( $\frac{1}{2}"$ )

Round  $\varnothing 50\text{mm}$  (2") Inclusive Length 18mm ( $1\frac{1}{16}"$ )



### Pebble

Round  $\varnothing 30\text{mm}$  ( $1\frac{3}{16}"$ ) Inclusive Length 42mm ( $1\frac{5}{8}"$ )

Round  $\varnothing 50\text{mm}$  (2") Inclusive Length 68mm ( $2\frac{11}{16}"$ )



### Flush Stud

Flat H36mm ( $1\frac{7}{16}"$ ) Inclusive Length 12mm ( $\frac{1}{2}"$ )

Round  $\varnothing 30\text{mm}$  ( $1\frac{3}{16}"$ ) Inclusive Length 12mm ( $\frac{1}{2}"$ )

Round  $\varnothing 50\text{mm}$  (2") Inclusive Length 18mm ( $1\frac{1}{16}"$ )



### Disc

Round  $\varnothing 30\text{mm}$  ( $1\frac{3}{16}"$ ) Inclusive Length 12mm ( $\frac{1}{2}"$ )

Round  $\varnothing 50\text{mm}$  (2") Inclusive Length 18mm ( $1\frac{1}{16}"$ )



### Ball

Round  $\varnothing 30\text{mm}$  ( $1\frac{3}{16}"$ ) Inclusive Length 66mm ( $2\frac{5}{8}"$ )

Round  $\varnothing 50\text{mm}$  (2") Inclusive Length 112mm ( $4\frac{7}{16}"$ )





Pictured - Round Ø50mm (1 3/16") - Round Ø30mm (1 1/16") Gliderpole® - Hand Drawn - Crystal Templar - Natural Silver  
Window treatments by Bryant Furnishing - Bournemouth - UK





Pictured from left to right -  
 Round  $\varnothing 30\text{mm}$  ( $1\frac{3}{16}"$ ) Gliderpole® - Hand Drawn  
 Halo • Gunmetal • Gloss • Globe • Gold • Gloss  
 Templar • Platinum • Gloss • Charm • Champagne • Gloss

## FINIALS

This design group lends Gliderpole a more flamboyant, extrovert character.

Finials can also be specified from the Simple Collection.



### Halo

$\varnothing 30\text{mm}$  ( $1\frac{3}{16}"$ ) Inclusive Length 5mm ( $\frac{3}{16}"$ )  
 $\varnothing 50\text{mm}$  (2") Inclusive Length 2mm ( $\frac{1}{16}"$ )



### Globe

$\varnothing 30\text{mm}$  ( $1\frac{3}{16}"$ ) Inclusive Length 73mm ( $2\frac{7}{8}"$ )  
 $\varnothing 50\text{mm}$  (2") Inclusive Length 114mm ( $4\frac{1}{2}"$ )



### Templar

$\varnothing 30\text{mm}$  ( $1\frac{3}{16}"$ ) Inclusive Length 79mm ( $3\frac{1}{8}"$ )  
 $\varnothing 50\text{mm}$  (2") Inclusive Length 119mm ( $4\frac{11}{16}"$ )




### Charm

$\varnothing 30\text{mm}$  ( $1\frac{3}{16}"$ ) Inclusive Length 69mm ( $2\frac{11}{16}"$ )  
 $\varnothing 50\text{mm}$  (2") Inclusive Length 117mm ( $4\frac{5}{8}"$ )



### Crystal Globe<sup>✧</sup>

$\varnothing 30\text{mm}$  ( $1\frac{3}{16}"$ ) Inclusive Length 73mm ( $2\frac{7}{8}"$ )  
 $\varnothing 50\text{mm}$  (2") Inclusive Length 114mm ( $4\frac{1}{2}"$ )

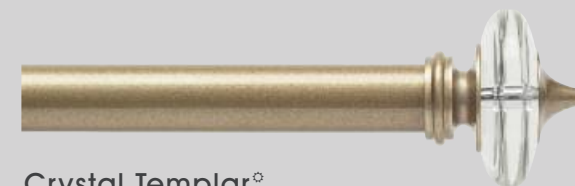

### Crystal Templar<sup>✧</sup>

$\varnothing 30\text{mm}$  ( $1\frac{3}{16}"$ ) Inclusive Length 79mm ( $3\frac{1}{8}"$ )  
 $\varnothing 50\text{mm}$  (2") Inclusive Length 119mm ( $4\frac{11}{16}"$ )

✧ Crystal finials should not be positioned in direct sunlight  
 For full technical information, sizes and weights please download the specification guide - [www.bradleycollection.com/specification-guides/](http://www.bradleycollection.com/specification-guides/)





Pictured - Round Ø50mm (2") Gliderpole® - Hand Drawn  
Stud • Dusk - Satin

## HAND DRAWN OPTIONS

Flat pole dimension - H36mm (1 7/16")

Round pole diameters - Ø30mm (1 3/16") • 50mm (2")

Unlimited system length<sup>‡</sup>

Bespoke bay service

High strength brackets for minimal fixing points

Magnetic bracket cover plates for concealed fixings

Standard and Wave® gliders and rollers



Straight & Bay Windows



Wave® brake option



Hand operated using  
draw rod

Draw Rods



Fine



Standard

Draw rod length:

1000mm (39 3/8")

Custom lengths available to order

## Gliding Options

Gliders



Drop from bottom of track:  
8mm (5/16")

Rollers\*



Drop from bottom of track:  
6mm (3/16")

Wave® gliders



Drop from bottom of track:  
6mm (3/16")

Wave® Pitch:  
80mm (3 1/8")

Wave® rollers\*



Drop from bottom of track:  
27mm (1 1/16")

Wave® Pitch:  
80mm (3 1/8")

<sup>‡</sup> supplied in sections - maximum section length 3.0m (10ft)

\*supplied as standard on systems over 3.0m (10ft) with single stack curtains

Weight restrictions apply. For full technical information please refer to the specification guide.  
[www.bradleycollection.com/specification-guides/](http://www.bradleycollection.com/specification-guides/)



# CORDED OPTIONS

Pictured - Round Ø30mm (1 1/8") Gliderpole® - Corded • Flush Stud • Dusk • Satin

Round pole diameters - Ø30mm (1 1/8") • 50mm (2")

Maximum length 6.0 Metres (20ft)<sup>‡</sup>

Bespoke bay service

High strength brackets for minimal fixing points

Magnetic bracket cover plates for concealed fixings

Standard and Wave® gliders and rollers


Internal cording mechanism with cord offset behind drapes

Concealed cord system

Control cord available in black or white on request

Twin cord system available for long or heavy applications

Metal cord retainer included as standard.



Straight & Bay Windows

## Cord Retainer




All corded tracks are supplied as standard with our metal cord retainer. This ensures that all cords are safely secured to the wall and complies with BS EN 13120:2009+A1 2014.

This will be supplied in the same finish as the system, unless advised otherwise.



Fixing plate size: Ø60mm (2 3/8")



Internal cord mechanism with hidden cord offset behind drapes



Concealed twin cord systems for heavy applications



Discreet cord retainer included as standard

## Gliding Options

### Gliders



Drop from bottom of track:  
8mm (5/16")

### Rollers\*



Drop from bottom of track:  
6mm (3/16")

### Wave® gliders



Drop from bottom of track:  
6mm (3/16")  
**Wave® Pitch:**  
80mm (3 1/8")

### Wave® rollers\*



Drop from bottom of track:  
27mm (1 1/16")  
**Wave® Pitch:**  
80mm (3 1/8")

<sup>‡</sup> supplied in sections - maximum section length 3.0m (10ft)

\*supplied as standard on systems over 3.0m (10ft) with single stack curtains

Weight restrictions apply. For full technical information please refer to the specification guide.  
[www.bradleycollection.com/specification-guides/](http://www.bradleycollection.com/specification-guides/)





Pictured - Round Ø50mm (2") Gliderpole® - Electric - Powered by Silent Gliss®  
Stud • Dusk - Satin

## ELECTRIC OPTIONS POWERED BY SILENT GLISS®

Round pole diameters - Ø50mm (2")

Maximum length 5 Metres (16.5ft)<sup>‡</sup>  
Standard rollers and Wave® gliders  
AC hidden motor  
Touch and go manual operation  
System allows manual operation during power failure  
Quiet motors, noise level at 300mm (1') <36dBA  
Integrated radio receiver  
Wireless controls  
No pre-wiring necessary



Powered by Silent Gliss®  
5190 motor



Concealed motors



Functional & decorative



Full wireless control, with  
wall mounted, hand held  
or timer options

### Gliding Options

#### Rollers



**Drop from bottom of track:**  
14mm (<sup>9</sup>/<sub>16</sub>" )

#### Wave® gliders 80mm (3<sup>1</sup>/<sub>8</sub>" ) pitch



**Drop from bottom of track:**  
20mm (<sup>13</sup>/<sub>16</sub>" )




**Wave® Pitch:**  
80mm (3<sup>1</sup>/<sub>8</sub>" )

<sup>‡</sup> Supplied in sections - maximum section length 3.0m (10ft)





Weight restrictions apply. For full technical information please refer to the specification guide.  
[www.bradleycollection.com/specification-guides/](http://www.bradleycollection.com/specification-guides/)

# BRACKETS & POLES

## Single Brackets

<b>Side</b> 	<b>Diameter</b> Flat H36mm (1 7/16") Round ø30mm (1 3/16") Round ø50mm (2")	<b>Projection from wall to gliderpole centre</b> 60mm (2 3/8"), 100mm (4") 60mm (2 3/8"), 100mm (4") 60mm (2 3/8"), 100mm (4")	<b>Fixing plate size</b> w32mm (1 1/4") x H70mm (2 3/4") w32mm (1 1/4") x H70mm (2 3/4") w32mm (1 1/4") x H70mm (2 3/4")
<b>Mid</b> 	<b>Diameter</b> Flat H36mm (1 7/16") Round ø30mm (1 3/16") Round ø50mm (2")	<b>Projection from wall to gliderpole centre</b> 60mm (2 3/8"), 100mm (4") 60mm (2 3/8"), 100mm (4") 60mm (2 3/8"), 100mm (4")	<b>Fixing plate size</b> w32mm (1 1/4") x H38mm (1 1/2") w32mm (1 1/4") x H38mm (1 1/2") w32mm (1 1/4") x H38mm (1 1/2")
<b>Recess with hook stop</b> 	<b>Diameter</b> Flat H36mm (1 7/16") Round ø30mm (1 3/16") Round ø50mm (2")	<b>Depth off wall</b> 14mm (9/16") 14mm (9/16") 14mm (9/16")	<b>Fixing plate size</b> w31mm (1 1/4") x H36mm (1 7/16") w40mm (1 9/16") x H31mm (1 1/4") w64mm (1 1/2") x H51mm (2")



## Ceiling Brackets

<b>Flush Light Duty</b> 	<b>Diameter</b> Flat H36mm (1 7/16") Round ø30mm (1 3/16")	<b>Drop from ceiling to top of gliderpole</b> 3mm (1/8") 3mm (1/8")	<b>Fixing plate size</b> w20mm (13/16") x L50mm (2") w20mm (13/16") x L50mm (2")
<b>Flush Heavy Duty</b> 	<b>Diameter</b> Flat H36mm (1 7/16") Round ø30mm (1 3/16") Round ø50mm (2")	<b>Drop from ceiling to top of gliderpole</b> 3mm (1/8") 3mm (1/8") 3mm (1/8")	<b>Fixing plate size</b> w40mm (1 9/16") x L59mm (2 5/16") w40mm (1 9/16") x L59mm (2 5/16") w40mm (1 9/16") x L59mm (2 5/16")
<b>Stand Off</b> 	<b>Diameter</b> Flat H36mm (1 7/16") Round ø30mm (1 3/16") Round ø50mm (2")	<b>Drop from ceiling to top of gliderpole</b> Min.30mm (1 3/16") Max.40mm (1 9/16") Min.30mm (1 3/16") Max.40mm (1 9/16") Min.30mm (1 3/16") Max.40mm (1 9/16")	<b>Fixing plate size</b> ø16mm (5/8") ø16mm (5/8") ø16mm (5/8")
<b>Adjustable</b> 	<b>Diameter</b> Flat H36mm (1 7/16") Round ø30mm (1 3/16") Round ø50mm (2")	<b>Drop from ceiling to top of gliderpole</b> Min.40mm (1 9/16") Max.200mm (8") Min.40mm (1 9/16") Max.200mm (8") Min.40mm (1 9/16") Max.200mm (8")	<b>Fixing plate size</b> ø65mm (2 5/16") ø65mm (2 5/16") ø65mm (2 5/16")

## Double Brackets

<b>Side</b> 	<b>Diameter</b> Flat H36mm (1 7/16") Round ø30mm (1 3/16") Round ø50mm (2")	<b>Projection from wall to gliderpole centre</b> F140mm (5 1/2") B adjustable F140mm (5 1/2") B adjustable F140mm (5 1/2") B adjustable	<b>Fixing plate size</b> w32mm (1 1/4") x H70mm (2 3/4") w32mm (1 1/4") x H70mm (2 3/4") w32mm (1 1/4") x H70mm (2 3/4")
<b>Mid</b> 	<b>Diameter</b> Flat H36mm (1 7/16") Round ø30mm (1 3/16") Round ø50mm (2")	<b>Projection from wall to gliderpole centre</b> F140mm (5 1/2") B adjustable F140mm (5 1/2") B adjustable F140mm (5 1/2") B adjustable	<b>Fixing plate size</b> w32mm (1 1/4") x H38mm (1 1/2") w32mm (1 1/4") x H38mm (1 1/2") w32mm (1 1/4") x H38mm (1 1/2")


## Adjustable Brackets

<b>Side</b> 	<b>Diameter</b> Flat H36mm (1 7/16") Round ø30mm (1 3/16") Round ø50mm (2")	<b>Projection from wall to gliderpole centre</b> Min.80mm (3 1/8") Max.130mm (5 1/8") Min.80mm (3 1/8") Max.130mm (5 1/8") Min.80mm (3 1/8") Max.130mm (5 1/8")	<b>Fixing plate size</b> w32mm (1 1/4") x H70mm (2 3/4") w32mm (1 1/4") x H70mm (2 3/4") w32mm (1 1/4") x H70mm (2 3/4")
<b>Mid</b> 	<b>Diameter</b> Flat H36mm (1 7/16") Round ø30mm (1 3/16") Round ø50mm (2")	<b>Projection from wall to gliderpole centre</b> Min.80mm (3 1/8") Max.130mm (5 1/8") Min.80mm (3 1/8") Max.130mm (5 1/8") Min.80mm (3 1/8") Max.130mm (5 1/8")	<b>Fixing plate size</b> w32mm (1 1/4") x H38mm (1 1/2") w32mm (1 1/4") x H38mm (1 1/2") w32mm (1 1/4") x H38mm (1 1/2")

## Poles

Poles are cut, bent and curved to suit individual requirements.  
When calculating the length of your pole, remember to allow tolerance beyond the width of the frame for the curtains to stack back to the edge of the window.

Maximum pole length in one piece 3.0m (118")\*.  
Poles exceeding the maximum length will be cut into equal parts unless otherwise specified.  
A pole joiner will be supplied.

		
<b>Size</b> Flat H36mm (1 7/16") Hand Round ø30mm (1 3/16") Hand Round ø50mm (2") Hand Round ø30mm (1 3/16") Corded Round ø50mm (2") Corded Round ø50mm (2") Electric	<b>Maximum distance between brackets</b> 1500mm (60") 1500mm (60") 1500mm (60") 1500mm (60") 1500mm (60") 1500mm (60")	<b>Minimum bend radius</b> R200mm (8") R300mm (12") R500mm (20") R300mm (12") R600mm (24") n/a





Pictured: ø25mm (1") - 19mm (1 1/4") Double Pole • Stud • Clay • Satin  
Shown with: James Hare - Simla Silk Fabric

# SIMPLE

---

Simple has a pleasing economy of line in design.

The sharp, modern form which results from this design intent is relaxed and brought to life by the application of contemporary coated finishes.

## SOFTENED EDGES

The distinctive hard-edged and linear styling of the Simple collection is pleasingly softened by coated finishes tuned in to modern interiors.

Pictured:  $\varnothing 30\text{mm}$  (1 $\frac{3}{16}$ " ) Pole • Ball • Flint • Satin





Pictured: ø38mm (1 1/2") pole • Flush Stud • Flint - Satin

## IN DETAIL

Pole diameters - Ø19mm (3/4") • 25mm (1") • 30mm (1 3/16") • 38mm (1 1/2") • 50mm (2")

Unlimited system length ◇

Easy install, drop-in brackets with magnetic cover plate

Lined rings

Passing system

Bespoke bending and curving service




Custom bending



Ceiling brackets



Passing System



Double brackets



Drapery arm  
See page 60

◇ Supplied in sections - Maximum section length 4.0m (157") - Section lengths over 2.4m (94") will incur a handling charge


# FINISHES

Simple has an unparalleled selection of subtle colour coats, which can be specified in matte\*, satin or gloss finishes.

For more glamorous projects, metallic coats are featured in both satin and gloss.

Coat options Matte (M) • Satin (S) • Gloss (G)

Pictured left to right: ø25mm (1") pole • Stud • Bone - Satin • Dove - Satin  
Parchment - Satin • Millstone - Satin • Clay - Satin • Cocoa - Satin  
Slate - Satin • Flint - Satin

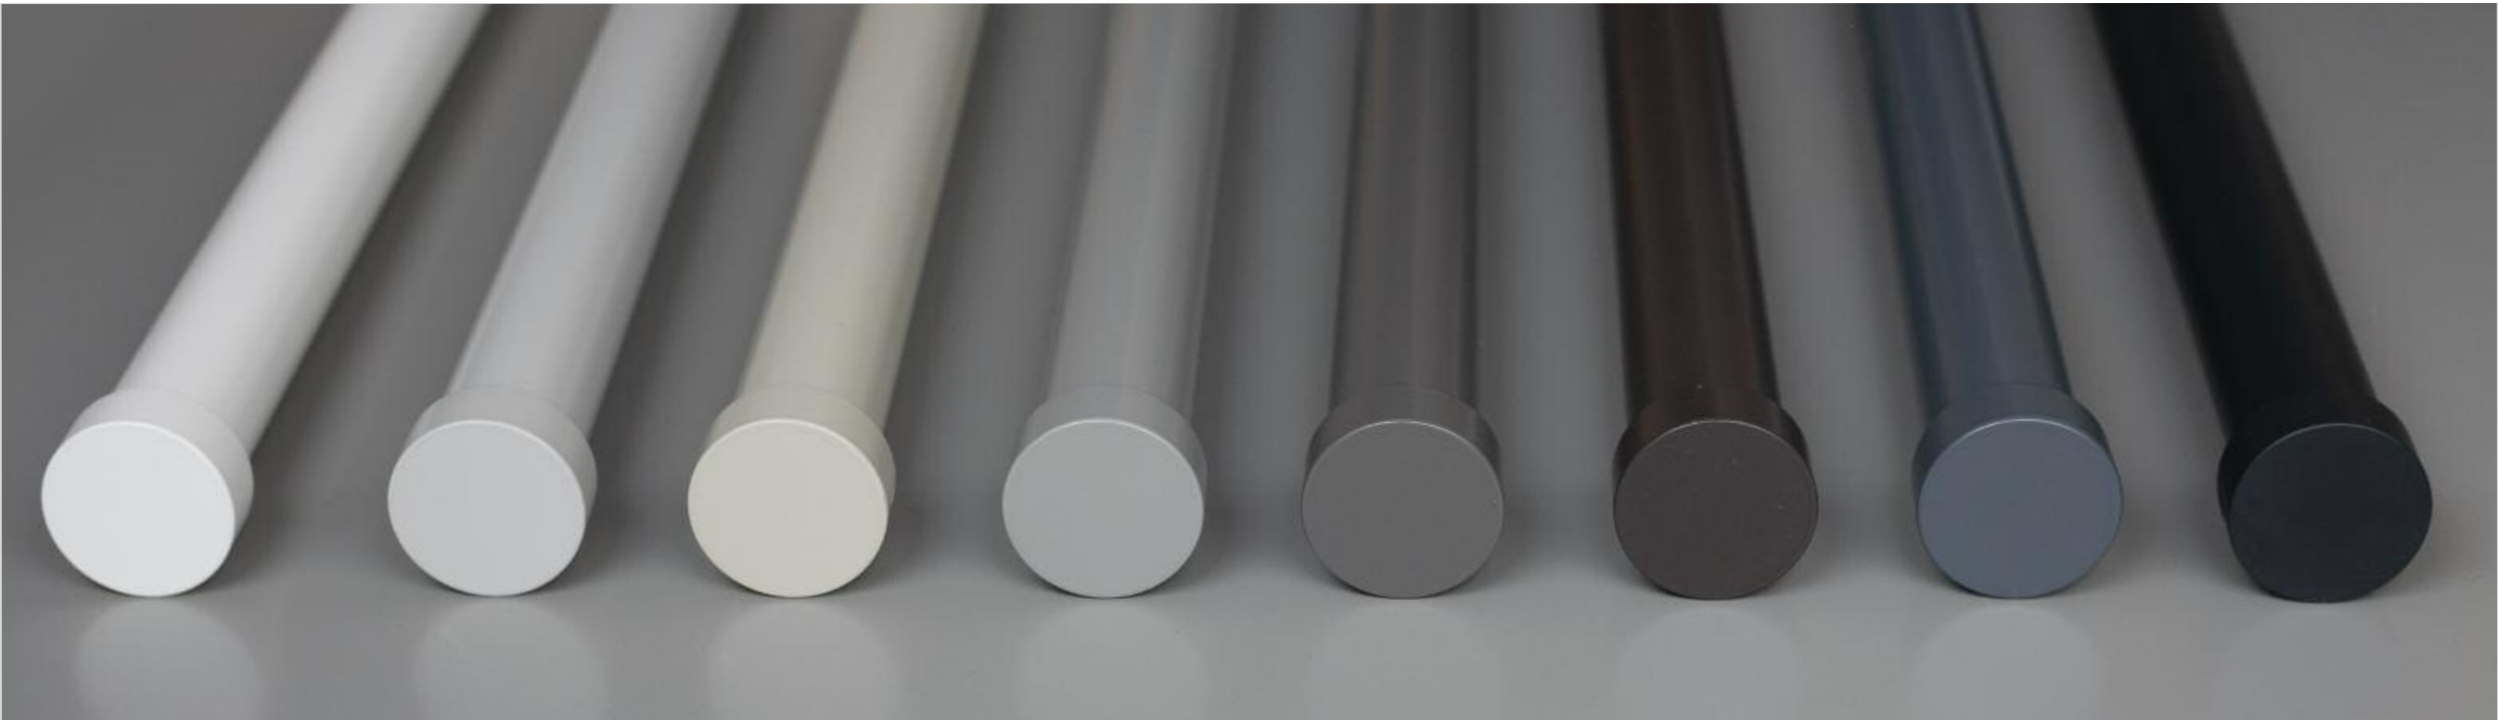

Cloud (M-S-G)



Ceramic (M-S-G)



Bone (M-S-G)



Cream (M-S-G)



Parchment (M-S-G)



Barley (M-S-G)



Dove (M-S-G)



Millstone (M-S-G)



Clay (M-S-G)



Cocoa (M-S-G)



Alabaster (M-S-G)



Dusk (M-S-G)



Granite (M-S-G)




Slate (M-S-G)



Flint (S-G)



Platinum (S-G)




Champagne (S-G)




Gold (S-G)



Cognac (S-G)



Gunmetal (S-G)



Bronzed



Polished Nickel+Ⓢ

Due to printing limitations colours in this brochure may not be accurate  
Samples are available on request - [www.bradleycollection.com/samples/](http://www.bradleycollection.com/samples/)

M Matte finishes have a maximum section length of 2.4m (94")  
\* Matte finish not available on Flint

+ A finishing charge will apply

Ⓢ Longer lead-times will apply



# FINIALS

Sharp, modern design softened by the use of contemporary coated finishes.



## Flush Stud

ø19mm (3/4") Inclusive Length 6mm (1/4")  
 ø25mm (1") Inclusive Length 6mm (1/4")  
 ø30mm (1 3/16") Inclusive Length 6mm (1/4")  
 ø38mm (1 1/2") Inclusive Length 8mm (5/16")  
 ø50mm (2") Inclusive Length 8mm (5/16")



## Stud

ø19mm (3/4") Inclusive Length 2mm (1/16")  
 ø25mm (1") Inclusive Length 3mm (3/8")  
 ø30mm (1 3/16") Inclusive Length 3mm (3/8")  
 ø38mm (1 1/2") Inclusive Length 3mm (3/8")  
 ø50mm (2") Inclusive Length 4mm (3/16")



## Disc

ø19mm (3/4") Inclusive Length 2mm (1/16")  
 ø25mm (1") Inclusive Length 3mm (3/8")  
 ø30mm (1 3/16") Inclusive Length 3mm (3/8")  
 ø38mm (1 1/2") Inclusive Length 3mm (3/8")  
 ø50mm (2") Inclusive Length 4mm (3/16")



## Large Disc

ø19mm (3/4") Inclusive Length 4mm (3/16")  
 ø25mm (1") Inclusive Length 4mm (3/16")  
 ø30mm (1 3/16") Inclusive Length 4mm (3/16")  
 ø38mm (1 1/2") Inclusive Length 6mm (1/4")  
 ø50mm (2") Inclusive Length 6mm (1/4")



## Pebble

ø19mm (3/4") Inclusive Length 25mm (1")  
 ø25mm (1") Inclusive Length 34mm (1 5/16")  
 ø30mm (1 3/16") Inclusive Length 39mm (1 9/16")  
 ø38mm (1 1/2") Inclusive Length 50mm (1 15/16")  
 ø50mm (2") Inclusive Length 66mm (2 7/16")



## Ball

ø19mm (3/4") Inclusive Length 50mm (2")  
 ø25mm (1") Inclusive Length 63mm (2 1/2")  
 ø30mm (1 3/16") Inclusive Length 62mm (2 7/16")  
 ø38mm (1 1/2") Inclusive Length 83mm (3 1/4")  
 ø50mm (2") Inclusive Length 104mm (4 1/8")



## Crystal Element<sup>☆</sup>

ø30mm (1 3/16") Inclusive Length 87mm (3 7/16")  
 ø50mm (2") Inclusive Length 126mm (4 15/16")



## Crystal Ball<sup>☆</sup>

ø19mm (3/4") Inclusive Length 55mm (3 3/16")  
 ø25mm (1") Inclusive Length 66mm (2 5/8")  
 ø30mm (1 3/16") Inclusive Length 66mm (2 5/8")  
 ø38mm (1 1/2") Inclusive Length 85mm (3 3/8")  
 ø50mm (2") Inclusive Length 108mm (4 1/4")







## Cut Crystal Ball<sup>☆</sup>

ø19mm (3/4") Inclusive Length 55mm (3 3/16")  
 ø25mm (1") Inclusive Length 66mm (2 5/8")  
 ø30mm (1 3/16") Inclusive Length 66mm (2 5/8")  
 ø38mm (1 1/2") Inclusive Length 85mm (3 3/8")  
 ø50mm (2") Inclusive Length 108mm (4 1/4")



Pictured left to right: ø38mm (1 1/2") pole • Pebble • Dusk - Satin • Disc • Dusk - Gloss Ball • Dusk - Matte

# BRACKETS




## Single Brackets

<div>Side</div> 	<div>Diameter</div> <div>ø19mm (3⁄4")</div> <div>ø25mm (1")</div> <div>ø30mm (1 3⁄16")</div> <div>ø38mm (1 1⁄2")</div> <div>ø50mm (2")</div>	<div>Projection from wall to pole centre</div> <div>60mm (2 3⁄8"), 100mm (4")</div> <div>60mm (2 3⁄8"), 100mm (4")</div> <div>100mm (4")</div> <div>100mm (4")</div> <div>100mm (4")</div>	<div>Fixing plate size</div> <div>w34mm (1 5⁄16") x h70mm (2 3⁄4")</div> <div>w34mm (1 5⁄16") x h70mm (2 3⁄4")</div> <div>w34mm (1 5⁄16") x h70mm (2 3⁄4")</div> <div>w52mm (2 1⁄16") x h104mm (4 1⁄8")</div> <div>w52mm (2 1⁄16") x h104mm (4 1⁄8")</div>
<div>Mid</div> 	<div>Diameter</div> <div>ø19mm (3⁄4")</div> <div>ø25mm (1")</div> <div>ø30mm (1 3⁄16")</div> <div>ø38mm (1 1⁄2")</div> <div>ø50mm (2")</div>	<div>Projection from wall to pole centre</div> <div>60mm (2 3⁄8"), 100mm (4")</div> <div>60mm (2 3⁄8"), 100mm (4")</div> <div>100mm (4")</div> <div>100mm (4")</div> <div>100mm (4")</div>	<div>Fixing plate size</div> <div>w70mm (2 3⁄4") x h34mm (1 5⁄16")</div> <div>w70mm (2 3⁄4") x h34mm (1 5⁄16")</div> <div>w70mm (2 3⁄4") x h34mm (1 5⁄16")</div> <div>w104mm (4 1⁄8") x h52mm (2 1⁄16")</div> <div>w104mm (4 1⁄8") x h52mm (2 1⁄16")</div>
<div>Passing</div> 	<div>Diameter</div> <div>ø19mm (3⁄4")</div> <div>ø25mm (1")</div> <div>ø30mm (1 3⁄16")</div> <div>ø38mm (1 1⁄2")</div> <div>ø50mm (2")</div>	<div>Projection from wall to pole centre</div> <div>60mm (2 3⁄8"), 100mm (4")</div> <div>60mm (2 3⁄8"), 100mm (4")</div> <div>100mm (4")</div> <div>100mm (4")</div> <div>100mm (4")</div>	<div>Fixing plate size</div> <div>w70mm (2 3⁄4") x h34mm (1 5⁄16")</div> <div>w70mm (2 3⁄4") x h34mm (1 5⁄16")</div> <div>w70mm (2 3⁄4") x h34mm (1 5⁄16")</div> <div>w104mm (4 1⁄8") x h52mm (2 1⁄16")</div> <div>w104mm (4 1⁄8") x h52mm (2 1⁄16")</div>
<div>Recess with ring stop</div> 	<div>Diameter</div> <div>ø19mm (3⁄4")</div> <div>ø25mm (1")</div> <div>ø30mm (1 3⁄16")</div> <div>ø38mm (1 1⁄2")</div> <div>ø50mm (2")</div>	<div>Depth off wall</div> <div>7mm (1⁄4")</div> <div>8mm (5⁄16")</div> <div>10mm (3⁄8")</div> <div>12mm (1⁄2")</div> <div>15mm (9⁄16")</div>	<div>Fixing plate size</div> <div>ø26mm (1")</div> <div>ø34mm (1 5⁄16")</div> <div>ø40mm (1 9⁄16")</div> <div>ø49mm (1 15⁄16")</div> <div>ø64mm (2 1⁄2")</div>



## Ceiling Brackets

<div>Ceiling</div> 	<div>Diameter</div> <div>ø19mm (3⁄4")</div> <div>ø25mm (1")</div> <div>ø30mm (1 3⁄16")</div> <div>ø38mm (1 1⁄2")</div> <div>ø50mm (2")</div>	<div>Drop from ceiling to pole centre</div> <div>60mm (2 3⁄8"), 100mm (4")</div> <div>60mm (2 3⁄8"), 100mm (4")</div> <div>100mm (4")</div> <div>100mm (4")</div> <div>100mm (4")</div>	<div>Fixing plate size</div> <div>w70mm (2 3⁄4") x h34mm (1 5⁄16")</div> <div>w70mm (2 3⁄4") x h34mm (1 5⁄16")</div> <div>w70mm (2 3⁄4") x h34mm (1 5⁄16")</div> <div>w104mm (4 1⁄8") x h52mm (2 1⁄16")</div> <div>w104mm (4 1⁄8") x h52mm (2 1⁄16")</div>
<div>Passing</div> 	<div>Diameter</div> <div>ø19mm (3⁄4")</div> <div>ø25mm (1")</div> <div>ø30mm (1 3⁄16")</div> <div>ø38mm (1 1⁄2")</div> <div>ø50mm (2")</div>	<div>Drop from ceiling to pole centre</div> <div>60mm (2 3⁄8"), 100mm (4")</div> <div>60mm (2 3⁄8"), 100mm (4")</div> <div>100mm (4")</div> <div>100mm (4")</div> <div>100mm (4")</div>	<div>Fixing plate size</div> <div>w70mm (2 3⁄4") x h34mm (1 5⁄16")</div> <div>w70mm (2 3⁄4") x h34mm (1 5⁄16")</div> <div>w70mm (2 3⁄4") x h34mm (1 5⁄16")</div> <div>w104mm (4 1⁄8") x h52mm (2 1⁄16")</div> <div>w104mm (4 1⁄8") x h52mm (2 1⁄16")</div>

## Double Brackets

<div>Side</div> 	<div>Diameter</div> <div>Fø25mm (1") Bø19mm (3⁄4")</div> <div>Fø50mm (2") Bø25mm (1")</div>	<div>Projection from wall to pole centre</div> <div>F160mm (6 5⁄16") B60mm (2 3⁄8")</div> <div>F200mm (8") B60mm (2 3⁄8")</div>	<div>Fixing plate size</div> <div>w34mm (1 5⁄16") x h70mm (2 3⁄4")</div> <div>w52mm (2 1⁄16") x h104mm (4 1⁄8")</div>
<div>Mid</div> 	<div>Diameter</div> <div>Fø25mm (1") Bø19mm (3⁄4")</div> <div>Fø50mm (2") Bø25mm (1")</div>	<div>Projection from wall to pole centre</div> <div>F160mm (6 5⁄16") B60mm (2 3⁄8")</div> <div>F200mm (8") B60mm (2 3⁄8")</div>	<div>Fixing plate size</div> <div>w70mm (2 3⁄4") x h34mm (1 5⁄16")</div> <div>w104mm (4 1⁄8") x h52mm (2 1⁄16")</div>
<div>Passing</div> 	<div>Diameter</div> <div>Fø25mm (1") Bø19mm (3⁄4")</div> <div>Fø50mm (2") Bø25mm (1")</div>	<div>Projection from wall to pole centre</div> <div>F160mm (6 5⁄16") B60mm (2 3⁄8")</div> <div>F200mm (8") B60mm (2 3⁄8")</div>	<div>Fixing plate size</div> <div>w72mm (2 13⁄16") x h59mm (2 5⁄16")</div> <div>w52mm (2 1⁄16") x h104mm (4 1⁄8")</div>

## Adjustable Brackets

<div>Side</div> 	<div>Diameter</div> <div>ø19mm (3⁄4")</div> <div>ø25mm (1")</div> <div>ø30mm (1 3⁄16")</div> <div>ø38mm (1 1⁄2")</div> <div>ø50mm (2")</div>	<div>Projection from wall to pole centre</div> <div>Min.60mm (2 3⁄8") Max.170mm (6 11⁄16")</div> <div>Min.60mm (2 3⁄8") Max.170mm (6 11⁄16")</div> <div>Min.100mm (4") Max.170mm (6 11⁄16")</div> <div>Min.100mm (4") Max.170mm (6 11⁄16")</div> <div>Min.100mm (4") Max.170mm (6 11⁄16")</div>	<div>Fixing plate size</div> <div>w34mm (1 5⁄16") x h70mm (2 3⁄4")</div> <div>w34mm (1 5⁄16") x h70mm (2 3⁄4")</div> <div>w34mm (1 5⁄16") x h70mm (2 3⁄4")</div> <div>w52mm (2 1⁄16") x h104mm (4 1⁄8")</div> <div>w52mm (2 1⁄16") x h104mm (4 1⁄8")</div>
<div>Passing</div> 	<div>Diameter</div> <div>ø19mm (3⁄4")</div> <div>ø25mm (1")</div> <div>ø30mm (1 3⁄16")</div> <div>ø38mm (1 1⁄2")</div> <div>ø50mm (2")</div>	<div>Projection from wall to pole centre</div> <div>Min.60mm (2 3⁄8") Max.170mm (6 11⁄16")</div> <div>Min.60mm (2 3⁄8") Max.170mm (6 11⁄16")</div> <div>Min.100mm (4") Max.170mm (6 11⁄16")</div> <div>Min.100mm (4") Max.170mm (6 11⁄16")</div> <div>Min.100mm (4") Max.170mm (6 11⁄16")</div>	<div>Fixing plate size</div> <div>w34mm (1 5⁄16") x h70mm (2 3⁄4")</div> <div>w34mm (1 5⁄16") x h70mm (2 3⁄4")</div> <div>w34mm (1 5⁄16") x h70mm (2 3⁄4")</div> <div>w52mm (2 1⁄16") x h104mm (4 1⁄8")</div> <div>w52mm (2 1⁄16") x h104mm (4 1⁄8")</div>

## Drapery Arm



Drapery arms have been designed to work at dormer windrows, doorways & above beds

	<div>Diameter</div> <div>ø25mm (1")</div>	<div>Fixing plate size</div> <div>w34mm (1 5⁄16") x h156mm (6 1⁄8")</div>
---	---	---



# RINGS, POLES & ACCESSORIES




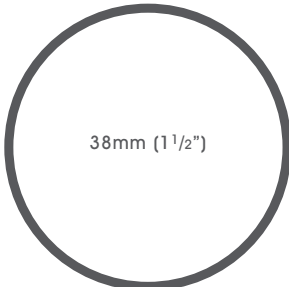
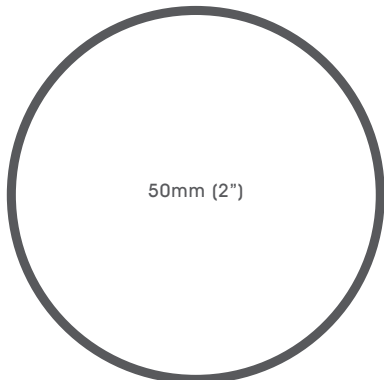
## Lined Rings

Ring	Diameter	Ring drop from top of pole to bottom of ringlet
	ø19mm (3/4")	46mm (1 13/16")
	ø25mm (1")	51mm (2")
	ø30mm (1 3/16")	51mm (2")
	ø38mm (1 1/2")	66mm (2 5/8")
	ø50mm (2")	80mm (3 1/8")
Passing Ring	Diameter	Ring drop from top of pole to bottom of ringlet
	ø19mm (3/4")	46mm (1 13/16")
	ø25mm (1")	51mm (2")
	ø30mm (1 3/16")	51mm (2")
	ø38mm (1 1/2")	66mm (2 5/8")
	ø50mm (2")	80mm (3 1/8")



## Poles

Poles are cut, bent and curved to suit individual requirements.  
When calculating the length of your pole, remember to allow tolerance beyond the width of the frame for the curtains to draw back to the edge of the window.


Maximum pole length in one piece 4.0m (157")\*.  
Poles exceeding the recommended maximum distance between brackets, will be cut into equal parts unless otherwise specified. Pole joiners will be supplied.

				
19mm (3/4")	25mm (1")	30mm (1 3/16")	38mm (1 1/2")	50mm (2")
Diameter	Recommended maximum distance between brackets	Recommended curtain type for pole diameter		Minimum bend radius
ø19mm (3/4")	1800mm (71")	Light to medium weight, lined & non interlined curtains		R75mm (3")
ø25mm (1")	2000mm (79")	Medium weight, lined & interlined curtains		R100mm (4")
ø30mm (1 3/16")	2100mm (83")	Medium weight, lined & interlined curtains		R255mm (10")
ø38mm (1 1/2")	2200mm (87")	Medium to heavy weight, lined & interlined curtains		R255mm (10")
ø50mm (2")	2400mm (96")	Heavy weight interlined curtains		R255mm (10")


## Ombres

Small	Large
	
Internal projection from wall: 150mm (5 7/8") Fixing plate size: ø19mm (3/4")	Internal projection from wall: 150mm (5 7/8") Fixing plate size: ø25mm (1")



## Hold back


Internal measurement: 137mm (5 3/8") Fixing plate size: ø44mm (1 3/4")

## Tie Back Hook


Projection: 29mm (1 1/8") Fixing plate size: w25mm (1") x h74mm (2 5/8")

## Draw Rods

Fine	Standard
	
Draw rod length: 1000mm (39 3/8") Custom lengths available to order	



Pictured - ø50mm (2") Pole • Stud • Brushed Stainless  
Interior design by Bayon Design Studio Inc - California - USA

# STAINLESS

The modernist stainless collection is a perfect example of form following function. the design language is pure and simple, with sharp linear forms resulting from the machining process.

The brushed and mirrored surface finishes, combined with subtle tinting technology emphasise the innate qualities of the high grade stainless steel used throughout.



# REFINED AND RESILIENT

High grade stainless steel in this collection works for wet rooms, coastal settings and outdoors.

Pictured - ø38mm (1½") Pole • Squat Disc • Brushed Carbon Tint  
Shown with: Lewis & Wood - Skittery Linen





Pictured - ø25mm (1") Pole • Octagon Stud • Brushed Brass Tint  
Shown with: Lewis & Wood - Linen Taffeta

# IN DETAIL

Pole diameters - Ø19mm (¾") • 25mm (1") • 38mm (1½") • 50mm (2")

- Unlimited system length◇
- Easy install, drop-in brackets with magnetic cover plate
- Lined rings in stainless steel on all diameters
- Passing system
- Bespoke bending and curving service
- Can be specified for wet room/outdoor use



Ceiling brackets



Double brackets



Passing system



Drapery arm  
See page 74



Custom bending

◇ Supplied in sections - Maximum section per length 2.4m (94")





## FINISHES

The renowned qualities of authentic stainless steel are emphasised by either a brushed or polished surface treatment, while a unique tinting process brings exciting new opportunities for modern design schemes.

Pictured left to right - Ø25mm (1") • Stud • Brushed Stainless • Brushed Brass Tint • Brushed Copper Tint • Brushed Rose Tint • Brushed Bronze Tint • Brushed Carbon Tint • Mirrored Stainless • Mirrored Brass Tint • Mirrored Copper Tint • Mirrored Rose Tint • Mirrored Bronze Tint • Mirrored Carbon Tint



Brushed Stainless



Brushed Brass Tint<sup>Ⓢ</sup>



Brushed Copper Tint<sup>Ⓢ</sup>



Brushed Rose Tint<sup>Ⓢ</sup>



Brushed Bronze Tint<sup>Ⓢ</sup>




Brushed Carbon Tint<sup>Ⓢ</sup>



Mirrored Stainless<sup>Ⓢ</sup>



Mirrored Brass Tint<sup>Ⓢ</sup>



Mirrored Copper Tint<sup>Ⓢ</sup>



Mirrored Rose Tint<sup>Ⓢ</sup>



Mirrored Bronze Tint<sup>Ⓢ</sup>



Mirrored Carbon Tint<sup>Ⓢ</sup>

Due to printing limitations colours in this brochure may not be accurate  
Samples are available on request - [www.bradleycollection.com/samples/](http://www.bradleycollection.com/samples/)

Ⓢ Longer lead-times will apply



# FINIALS


Modern, linear forms presented in brushed and mirrored finishes.

Pictured left to right - ø25mm (1") • Disc • Brushed Stainless • Octagon Stud • Brushed Carbon Tint  
Knurled Stud • Brushed Brass Tint • Large Disc • Brushed Copper Tint • Faceted Disc • Mirrored Stainless  
Ball • Brushed Bronze Tint • Squat Disc • Mirrored Brass Tint • Stud • Brushed Rose Tint



## Stud

- ø19mm (3/4") Inclusive Length 2mm (1/16")
- ø25mm (1") Inclusive Length 3mm (3/8")
- ø38mm (1 1/2") Inclusive Length 3mm (3/8")
- ø50mm (2") Inclusive Length 4mm (3/16")



## Knurled Stud

- ø19mm (3/4") Inclusive Length 5mm (3/16")
- ø25mm (1") Inclusive Length 7mm (1/4")
- ø38mm (1 1/2") Inclusive Length 7mm (1/4")
- ø50mm (2") Inclusive Length 9mm (3/8")



## Octagon Stud

- ø19mm (3/4") Inclusive Length 7mm (1/4")
- ø25mm (1") Inclusive Length 10mm (3/8")
- ø38mm (1 1/2") Inclusive Length 11mm (7/16")
- ø50mm (2") Inclusive Length 14mm (9/16")



## Squat Disc

- ø19mm (3/4") Inclusive Length 17mm (11/16")
- ø25mm (1") Inclusive Length 23mm (7/8")
- ø38mm (1 1/2") Inclusive Length 33mm (1 5/16")
- ø50mm (2") Inclusive Length 44mm (1 3/4")



## Disc

- ø19mm (3/4") Inclusive Length 2mm (1/16")
- ø25mm (1") Inclusive Length 3mm (3/8")
- ø38mm (1 1/2") Inclusive Length 3mm (3/8")
- ø50mm (2") Inclusive Length 4mm (3/16")



## Large Disc

- ø19mm (3/4") Inclusive Length 4mm (3/16")
- ø25mm (1") Inclusive Length 4mm (3/16")
- ø38mm (1 1/2") Inclusive Length 6mm (1/4")
- ø50mm (2") Inclusive Length 6mm (1/4")



## Faceted Disc

- ø19mm (3/4") Inclusive Length 21mm (13/16")
- ø25mm (1") Inclusive Length 28mm (1 1/8")
- ø38mm (1 1/2") Inclusive Length 41mm (1 5/8")
- ø50mm (2") Inclusive Length 54mm (2 1/8")







## Ball

- ø19mm (3/4") Inclusive Length 50mm (2")
- ø25mm (1") Inclusive Length 63mm (2 1/2")
- ø38mm (1 1/2") Inclusive Length 83mm (3 1/4")
- ø50mm (2") Inclusive Length 104mm (4 1/16")





# BRACKETS




## Single Brackets

<div>Side</div> 	<div>Diameter</div> <div>ø19mm (3/4")</div> <div>ø25mm (1")</div> <div>ø38mm (1 1/2")</div> <div>ø50mm (2")</div>	<div>Projection from wall to pole centre</div> <div>60mm (2 3/8"), 100mm (4")</div> <div>60mm (2 3/8"), 100mm (4")</div> <div>100mm (4")</div> <div>100mm (4")</div>	<div>Fixing plate size</div> <div>w34mm (1 5/16") x h70mm (2 3/4")</div> <div>w34mm (1 5/16") x h70mm (2 3/4")</div> <div>w52mm (2 1/16") x h104mm (4 1/8")</div> <div>w52mm (2 1/16") x h104mm (4 1/8")</div>
<div>Mid</div> 	<div>Diameter</div> <div>ø19mm (3/4")</div> <div>ø25mm (1")</div> <div>ø38mm (1 1/2")</div> <div>ø50mm (2")</div>	<div>Projection from wall to pole centre</div> <div>60mm (2 3/8"), 100mm (4")</div> <div>60mm (2 3/8"), 100mm (4")</div> <div>100mm (4")</div> <div>100mm (4")</div>	<div>Fixing plate size</div> <div>w70mm (2 3/4") x h34mm (1 5/16")</div> <div>w70mm (2 3/4") x h34mm (1 5/16")</div> <div>w104mm (4 1/8") x h52mm (2 1/16")</div> <div>w104mm (4 1/8") x h52mm (2 1/16")</div>
<div>Passing</div> 	<div>Diameter</div> <div>ø19mm (3/4")</div> <div>ø25mm (1")</div> <div>ø38mm (1 1/2")</div> <div>ø50mm (2")</div>	<div>Projection from wall to pole centre</div> <div>60mm (2 3/8"), 100mm (4")</div> <div>60mm (2 3/8"), 100mm (4")</div> <div>100mm (4")</div> <div>100mm (4")</div>	<div>Fixing plate size</div> <div>w70mm (2 3/4") x h34mm (1 5/16")</div> <div>w70mm (2 3/4") x h34mm (1 5/16")</div> <div>w104mm (4 1/8") x h52mm (2 1/16")</div> <div>w104mm (4 1/8") x h52mm (2 1/16")</div>
<div>Recess with ring stop</div> 	<div>Diameter</div> <div>ø19mm (3/4")</div> <div>ø25mm (1")</div> <div>ø38mm (1 1/2")</div> <div>ø50mm (2")</div>	<div>Depth off wall</div> <div>7mm (1/4")</div> <div>8mm (5/16")</div> <div>12mm (1/2")</div> <div>15mm (9/16")</div>	<div>Fixing plate size</div> <div>ø26mm (1")</div> <div>ø34mm (1 5/16")</div> <div>ø49mm (1 15/16")</div> <div>ø64mm (2 1/2")</div>



## Ceiling Brackets

<div>Ceiling</div> 	<div>Diameter</div> <div>ø19mm (3/4")</div> <div>ø25mm (1")</div> <div>ø38mm (1 1/2")</div> <div>ø50mm (2")</div>	<div>Drop from ceiling to pole centre</div> <div>60mm (2 3/8"), 100mm (4")</div> <div>60mm (2 3/8"), 100mm (4")</div> <div>100mm (4")</div> <div>100mm (4")</div>	<div>Fixing plate size</div> <div>w70mm (2 3/4") x h34mm (1 5/16")</div> <div>w70mm (2 3/4") x h34mm (1 5/16")</div> <div>w104mm (4 1/8") x h52mm (2 1/16")</div> <div>w104mm (4 1/8") x h52mm (2 1/16")</div>
<div>Passing</div> 	<div>Diameter</div> <div>ø19mm (3/4")</div> <div>ø25mm (1")</div> <div>ø38mm (1 1/2")</div> <div>ø50mm (2")</div>	<div>Drop from ceiling to pole centre</div> <div>60mm (2 3/8"), 100mm (4")</div> <div>60mm (2 3/8"), 100mm (4")</div> <div>100mm (4")</div> <div>100mm (4")</div>	<div>Fixing plate size</div> <div>w70mm (2 3/4") x h34mm (1 5/16")</div> <div>w70mm (2 3/4") x h34mm (1 5/16")</div> <div>w104mm (4 1/8") x h52mm (2 1/16")</div> <div>w104mm (4 1/8") x h52mm (2 1/16")</div>

## Double Brackets

<div>Side</div> 	<div>Diameter</div> <div>Fø25mm (1") Bø19mm (3/4")</div> <div>Fø50mm (2") Bø25mm (1")</div>	<div>Projection from wall to pole centre</div> <div>F160mm (6 5/16") B60mm (2 3/8")</div> <div>F200mm (8") B60mm (2 3/8")</div>	<div>Fixing plate size</div> <div>w34mm (1 5/16") x h70mm (2 3/4")</div> <div>w52mm (2 1/16") x h104mm (4 1/8")</div>
<div>Mid</div> 	<div>Diameter</div> <div>Fø25mm (1") Bø19mm (3/4")</div> <div>Fø50mm (2") Bø25mm (1")</div>	<div>Projection from wall to pole centre</div> <div>F160mm (6 5/16") B60mm (2 3/8")</div> <div>F200mm (8") B60mm (2 3/8")</div>	<div>Fixing plate size</div> <div>w70mm (2 3/4") x h34mm (1 5/16")</div> <div>w104mm (4 1/8") x h52mm (2 1/16")</div>
<div>Passing</div> 	<div>Diameter</div> <div>Fø25mm (1") Bø19mm (3/4")</div> <div>Fø50mm (2") Bø25mm (1")</div>	<div>Projection from wall to pole centre</div> <div>F160mm (6 5/16") B60mm (2 3/8")</div> <div>F200mm (8") B60mm (2 3/8")</div>	<div>Fixing plate size</div> <div>w72mm (2 13/16") x h59mm (2 5/16")</div> <div>w52mm (2 1/16") x h104mm (4 1/8")</div>

## Adjustable Brackets

<div>Side</div> 	<div>Diameter</div> <div>ø19mm (3/4")</div> <div>ø25mm (1")</div> <div>ø38mm (1 1/2")</div> <div>ø50mm (2")</div>	<div>Projection from wall to pole centre</div> <div>Min.60mm (2 3/8") Max.170mm (6 11/16")</div> <div>Min.60mm (2 3/8") Max.170mm (6 11/16")</div> <div>Min.100mm (4") Max.170mm (6 11/16")</div> <div>Min.100mm (4") Max.170mm (6 11/16")</div>	<div>Fixing plate size</div> <div>w34mm (1 5/16") x h70mm (2 3/4")</div> <div>w34mm (1 5/16") x h70mm (2 3/4")</div> <div>w52mm (2 1/16") x h104mm (4 1/8")</div> <div>w52mm (2 1/16") x h104mm (4 1/8")</div>
<div>Passing</div> 	<div>Diameter</div> <div>ø19mm (3/4")</div> <div>ø25mm (1")</div> <div>ø38mm (1 1/2")</div> <div>ø50mm (2")</div>	<div>Projection from wall to pole centre</div> <div>Min.60mm (2 3/8") Max.170mm (6 11/16")</div> <div>Min.60mm (2 3/8") Max.170mm (6 11/16")</div> <div>Min.100mm (4") Max.170mm (6 11/16")</div> <div>Min.100mm (4") Max.170mm (6 11/16")</div>	<div>Fixing plate size</div> <div>w34mm (1 5/16") x h70mm (2 3/4")</div> <div>w34mm (1 5/16") x h70mm (2 3/4")</div> <div>w52mm (2 1/16") x h104mm (4 1/8")</div> <div>w52mm (2 1/16") x h104mm (4 1/8")</div>


## Drapery Arm


Drapery arms have been designed to work at dormer windrows, doorways & above beds

	<div>Diameter</div> <div>ø25mm (1")</div>	<div>Fixing plate size</div> <div>w34mm (1 5/16") x h156mm (6 1/8")</div>
---	---	---

# RINGS, POLES & ACCESSORIES

## Lined Rings

Ring	Diameter	Ring drop from top of pole to bottom of ringlet
	ø19mm (3/4")	47mm (1 7/8")
	ø25mm (1")	55mm (2 3/16")
	ø38mm (1 1/2")	66mm (2 5/8")
	ø50mm (2")	80mm (3 1/8")

Passing Ring	Diameter	Ring drop from top of pole to bottom of ringlet
	ø19mm (3/4")	47mm (1 7/8")
	ø25mm (1")	55mm (2 3/16")
	ø38mm (1 1/2")	66mm (2 5/8")
	ø50mm (2")	80mm (3 1/8")





## Poles

Poles are cut, bent and curved to suit individual requirements.  
When calculating the length of your pole, remember to allow tolerance beyond the width of the frame for the curtains to draw back to the edge of the window.


Maximum pole length in one piece 2.4m (96").  
Poles exceeding the recommended maximum distance between brackets, will be cut into equal parts unless otherwise specified. Pole joiners will be supplied.

Diameter	Recommended maximum distance between brackets	Recommended curtain type for pole diameter	Minimum bend radius
ø19mm (3/4")	1800mm (71")	Light to medium weight, lined & non interlined curtains	R75mm (3")
ø25mm (1")	2000mm (79")	Medium weight, lined & interlined curtains	R100mm (4")
ø38mm (1 1/2")	2200mm (87")	Medium to heavy weight, lined & interlined curtains	R255mm (10")
ø50mm (2")	2400mm (96")	Heavy weight interlined curtains	R255mm (10")


## Ombres

Small	Large
	
Internal projection from wall: 150mm (5 7/8") Fixing plate size: ø19mm (3/4")	Internal projection from wall: 150mm (5 7/8") Fixing plate size: ø25mm (1")



## Hold back


Internal measurement: 137mm (5 3/8") Fixing plate size: ø44mm (1 3/4")

## Tie Back Hook


Projection: 29mm (1 1/8") Fixing plate size: w25mm (1") x h74mm (2 15/16")

## Draw Rods

Fine	Standard
	
Draw rod length: 1000mm (39 3/8") Custom lengths available to order	





Pictured - ø38mm (1 1/2") Classic Coverpole • Stud • Polished Brass Tint  
Project by Gallagher London - London SW7 - UK

# ECLIPSE

Peerless and opulent, this collection truly has no rival.

A rare, luxurious aesthetic and freedom of expression in design are balanced with the final word in functionality and control.

The world's finest.





Pictured: - ø38mm (1 1/2") Classic Coverpole • Stud • Polished Brass Tint  
Project by Gallagher London - London SW7 - UK



# CLASSIC STEEL



The intrinsic quality of steel is expressed through translucent coated finishes and soft, traditional styling cues.

Pictured -  $\varnothing 38\text{mm}$  (1½") Classic Coverpole • Stud • Polished



## FINIALS

A subtle softness of hand is the signature of this edit. Classic rounded cues counterpoint a more contemporary streamlining of scale.



### Stud

$\varnothing 30\text{mm}$  (1¾") Inclusive Length 8mm ( $\frac{5}{16}$ ")  
 $\varnothing 38\text{mm}$  (1½") Inclusive Length 9mm ( $\frac{3}{8}$ ")  
 $\varnothing 50\text{mm}$  (2") Inclusive Length 10mm ( $\frac{3}{8}$ ")



### Large Stud

$\varnothing 30\text{mm}$  (1¾") Inclusive Length 8mm ( $\frac{5}{16}$ ")  
 $\varnothing 38\text{mm}$  (1½") Inclusive Length 9mm ( $\frac{3}{8}$ ")  
 $\varnothing 50\text{mm}$  (2") Inclusive Length 10mm ( $\frac{3}{8}$ ")



### Button Stud

$\varnothing 30\text{mm}$  (1¾") Inclusive Length 44mm (1⅞")  
 $\varnothing 38\text{mm}$  (1½") Inclusive Length 58mm (2⅝")  
 $\varnothing 50\text{mm}$  (2") Inclusive Length 69mm (2⅞")



### Ball

$\varnothing 30\text{mm}$  (1¾") Inclusive Length 54mm (2⅞")  
 $\varnothing 38\text{mm}$  (1½") Inclusive Length 65mm (2⅞")  
 $\varnothing 50\text{mm}$  (2") Inclusive Length 86mm (3⅞")

## FINISHES

The purity of the signature polished steel finish is complemented by a palette of tints developed to emphasise the intrinsic quality of authentic steel.

Other coated finishes may also be specified on request.

Coat options Satin (s) • Gloss (g)



Polished



Polished Brass Tint



Polished Copper Tint



Polished Bronze Tint



Waxed



Polished Rose Tint



Flint (s-g)

Due to printing limitations colours in this brochure may not be accurate  
 Samples are available on request - [www.bradleycollection.com/samples/](http://www.bradleycollection.com/samples/)

# PROGRESSIVE STAINLESS STEEL



This contemporary design grouping emphasises and enhances the sharp, architectural nature of stainless steel.

Pictured -  $\varnothing 30\text{mm}$  (1 $\frac{3}{16}$ " ) Progressive Coverpole • Disc • Brushed Stainless



## FINIALS

A leading-edge design edit, characterised by detailing which is sharp and purposeful but remains understated.



### Stud

$\varnothing 30\text{mm}$  (1 $\frac{3}{16}$ " ) Inclusive Length 6mm (1 $\frac{1}{4}$ " )  
 $\varnothing 38\text{mm}$  (1 $\frac{1}{2}$ " ) Inclusive Length 7mm (1 $\frac{1}{4}$ " )  
 $\varnothing 50\text{mm}$  (2" ) Inclusive Length 8mm (5 $\frac{1}{16}$ " )



### Disc

$\varnothing 30\text{mm}$  (1 $\frac{3}{16}$ " ) Inclusive Length 6mm (1 $\frac{1}{4}$ " )  
 $\varnothing 38\text{mm}$  (1 $\frac{1}{2}$ " ) Inclusive Length 7mm (1 $\frac{1}{4}$ " )  
 $\varnothing 50\text{mm}$  (2" ) Inclusive Length 8mm (5 $\frac{1}{16}$ " )



### Contrast Stud

$\varnothing 30\text{mm}$  (1 $\frac{3}{16}$ " ) Inclusive Length 17mm (1 $\frac{1}{16}$ " )  
 $\varnothing 38\text{mm}$  (1 $\frac{1}{2}$ " ) Inclusive Length 20mm (1 $\frac{3}{16}$ " )  
 $\varnothing 50\text{mm}$  (2" ) Inclusive Length 23mm (7 $\frac{1}{8}$ " )



### Ball

$\varnothing 30\text{mm}$  (1 $\frac{3}{16}$ " ) Inclusive Length 52mm (2 $\frac{1}{16}$ " )  
 $\varnothing 38\text{mm}$  (1 $\frac{1}{2}$ " ) Inclusive Length 65mm (2 $\frac{7}{16}$ " )  
 $\varnothing 50\text{mm}$  (2" ) Inclusive Length 86mm (3 $\frac{3}{8}$ " )

## FINISHES

A group of unique metal tints serves to reveal rather than obscure the machined qualities and personality of the stainless steel.

Other coated finishes may also be specified on request.

Coat options Matte (M) • Satin (S) • Gloss (G)



Brushed Stainless




Brushed Brass Tint




Brushed Copper Tint



Brushed Rose Tint



Brushed Bronze Tint



Brushed Carbon Tint



Cloud (M-S-G)




Dove (M-S-G)



Millstone (M-S-G)



Slate (M-S-G)



Flint (S-G)

Due to printing limitations colours in this brochure may not be accurate  
 Samples are available on request - [www.bradleycollection.com/samples/](http://www.bradleycollection.com/samples/)

M Matte finishes have a maximum section length of 2.4m (94")






Pictured - ø38mm (1½") Classic Coverpole • Hand Drawn • Stud • Polished

# HAND DRAWN OPTIONS



Round Ø30mm (1⅜") • 38mm (1½") • 50mm (2")

- Unlimited system length
- Bespoke bay service
- High strength brackets for minimal fixing points
- Magnetic bracket cover plates for concealed fixings
- Standard and Wave® gliders and rollers

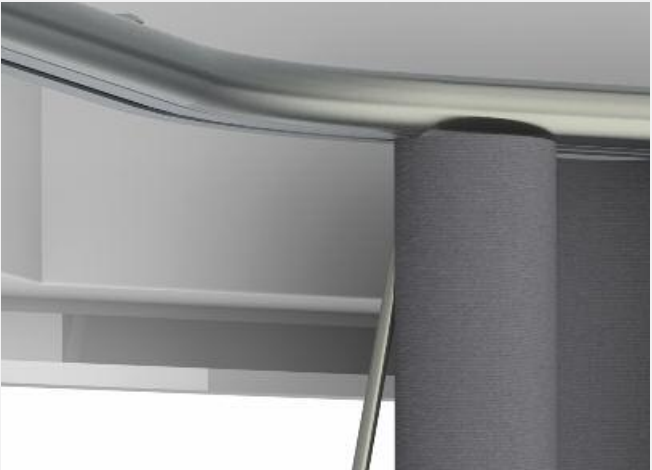

Hand operated using draw rod

## Draw Rods



Fine Standard

Draw rod length:  
1000mm (39⅜")  
Custom lengths available to order

## Gliding Options

### Gliders



Drop from bottom of track:  
20mm (13/16")

### Rollers\*




Drop from bottom of track:  
20mm (13/16")

### Wave® gliders



Drop from bottom of track:  
20mm (13/16")  
**Wave® Pitch:**  
80mm (3 1/8")

### Wave® rollers\*



Drop from bottom of track:  
20mm (13/16")  
**Wave® Pitch:**  
80mm (3 1/8")

### Ripplefold® rollers



Drop from bottom of track:  
20mm (13/16")  
**Ripplefold® Fullness:**  
80% • 100% • 120%

Supplied in sections - maximum section length 2.9m (9.5ft)  
\* Supplied as standard on systems over 2.9m (9.5ft) with single stack curtains

Weight restrictions apply. For full technical information please refer to the specification guide.  
[www.bradleycollection.com/specification-guides/](http://www.bradleycollection.com/specification-guides/)



Pictured - Ø38mm (1 1/2") Classic Coverpole • Rotary Drive • Ball • Polished

## ROTARY DRIVE OPTIONS



Round Ø30mm (1 3/16") • 38mm (1 1/2") • 50mm (2")

Unique new Rotary Drive system (patent applied for), eliminates child safety concerns

Geared system for rapid curtain operation

Large, heavy curtains move with minimal user effort

Custom length Rotary Drive handle for user comfort

Free spinning system protects from accidental damage

Suitable for large expanse, interlined and heavy curtains

Sleeve guard protects curtain fabric

Straight poles maximum length 15 Metres (49ft)<sup>‡</sup>

Bespoke bay service

Standard and Wave® gliders and rollers

Ripplefold rollers



Geared rotary solution that removes the need for cording



Concealed control rod



Folding handle spins freely when curtains are manually opened.



Sleeve Guard designed to protect drapes


### Gliding Options

#### Gliders



Drop from bottom of track:  
20mm (13/16")

#### Rollers\*




Drop from bottom of track:  
20mm (13/16")

#### Wave® gliders




Drop from bottom of track:  
20mm (13/16")  
**Wave® Pitch:**  
80mm (3 1/8")

#### Wave® rollers\*



Drop from bottom of track:  
20mm (13/16")  
**Wave® Pitch:**  
80mm (3 1/8")

#### Ripplefold® rollers



Drop from bottom of track:  
20mm (13/16")  
**Ripplefold® Fullness:**  
80% • 100% • 120%

<sup>‡</sup> Supplied in sections - maximum section length 2.9m (9.5ft)

\* Supplied as standard on systems over 2.9m (9.5ft) with single stack curtains

Weight restrictions apply. For full technical information please refer to the specification guide.  
[www.bradleycollection.com/specification-guides/](http://www.bradleycollection.com/specification-guides/)



# ELECTRIC OPTIONS POWERED BY SILENT GLISS®

Round Ø30mm (1 3⁄16") • 38mm (1 1⁄2") • 50mm (2")

- Straight poles maximum length 15 Metres (49ft)⌘
- Bespoke bay service
- Standard and Wave® gliders and rollers
- DC & AC hidden motor options
- Touch and go manual operation
- System allows manual operation during power failure
- Quiet motors, noise level at 300mm (1') <36dBA
- Wireless controls or home automation



Powered by Silent Gliss®  
9060 motor



Concealed motors



Remote control through  
modular radio receiver  
and 9940 remote



Control through Silent  
Gliss® - Move app«

## Gliding Options

### Gliders




Drop from bottom of track:  
20mm (13⁄16")

### Rollers\*



Drop from bottom of track:  
20mm (13⁄16")

### Wave® gliders



Drop from bottom of track:  
20mm (13⁄16")  
**Wave® Pitch:**  
80mm (31⁄8")

### Wave® rollers\*



Drop from bottom of track:  
20mm (13⁄16")  
**Wave® Pitch:**  
80mm (31⁄8")

⌘ Supplied in sections - maximum section length 2.9m (9.5ft)  
\* Supplied as standard on systems over 2.9m (9.5ft) with single stack curtains  
« Move server set 9960 is required for use with this app

Weight restrictions apply. For full technical information please refer to the specification guide.  
[www.bradleycollection.com/specification-guides/](http://www.bradleycollection.com/specification-guides/)



Pictured - ø38mm (1 1⁄2") Classic Coverpole • Electric - Powered by Silent Gliss® • Large Stud • Polished



## ELECTRIC OPTIONS POWERED BY LUTRON®

Round Ø38mm (1 1/2") • 50mm (2")


Straight poles maximum length 9.0 Metres (29.5ft)<sup>‡</sup>  
 Bespoke bay service  
 Standard and Ripplefold® rollers  
 Low voltage concealed motors  
 Three motor ratings for differing curtain weights  
 Quiet motors, noise level at 1000mm (3') <44dBA  
 Fully compatible with Lutron® QS Home Automation systems  
 Stand-alone remote control options



Powered by Lutron®



Concealed motors



Remote control through QS  
wireless dongle & Pico  
remote



Control through QS home  
automation systems

### Gliding Options

#### Rollers



**Drop from bottom of track:**  
12mm (7/16")

#### Ripplefold® rollers



**Drop from bottom of track:**  
20mm (13/16")  
**Ripplefold® Fullness:**  
80% • 100% • 120%

<sup>‡</sup> Supplied in sections - maximum section length 2.9m (9.5ft)


Weight restrictions apply. For full technical information please refer to the specification guide.  
[www.bradleycollection.com/specification-guides/](http://www.bradleycollection.com/specification-guides/)



Pictured - Ø38mm (1 1/2") Classic Coverpole • Electric - Powered by Lutron® • Button Stud • Polished



BRACKETS

Single Brackets

Side	Diameter	Projection from wall to track centre	Fixing plate size
	ø30mm (1 3⁄16")	100mm (4")	w34mm (1 5⁄16") x H70mm (2 3⁄4")
	ø38mm (1 1⁄2")	100mm (4")	w52mm (2 1⁄16") x H104mm (4 1⁄8")
	ø50mm (2")	100mm (4")	w52mm (2 1⁄16") x H104mm (4 1⁄8")

Mid	Mid - Joining	Diameter	Projection from wall to track centre	Fixing plate size
		ø30mm (1 3⁄16")	100mm (4")	w70mm (2 3⁄4") x H34mm (1 5⁄16")
		ø38mm (1 1⁄2")	100mm (4")	w104mm (4 1⁄8") x H52mm (2 1⁄16")
		ø50mm (2")	100mm (4")	w104mm (4 1⁄8") x H52mm (2 1⁄16")

Ceiling Brackets

Flush	Flush - Joining	Diameter	Drop from ceiling to top of pole	Fixing plate size
		ø30mm (1 3⁄16")	3mm (1⁄8")	w70mm (2 3⁄4") x H34mm (1 5⁄16")
		ø38mm (1 1⁄2")	3mm (1⁄8")	w70mm (2 3⁄4") x H34mm (1 5⁄16")
		ø50mm (2")	3mm (1⁄8")	w70mm (2 3⁄4") x H34mm (1 5⁄16")


Double Brackets

Side	Diameter	Projection from wall to track centre	Fixing plate size
	Fø38mm (1 1⁄2") Bø30mm (1 3⁄16")	F160mm (6 5⁄16") B60mm (2 3⁄8")	w52mm (2 1⁄16") x H104mm (4 1⁄8")
	Fø50mm (2") Bø30mm (1 3⁄16")	F160mm (6 5⁄16") B60mm (2 3⁄8")	w52mm (2 1⁄16") x H104mm (4 1⁄8")

Mid	Mid - Joining	Diameter	Projection from wall to track centre	Fixing plate size
		Fø38mm (1 1⁄2") Bø30mm (1 3⁄16")	F160mm (6 5⁄16") B60mm (2 3⁄8")	w104mm (4 1⁄8") x H52mm (2 1⁄16")
		Fø50mm (2") Bø30mm (1 3⁄16")	F160mm (6 5⁄16") B60mm (2 3⁄8")	w104mm (4 1⁄8") x H52mm (2 1⁄16")

Poles are cut and bent to suit individual requirements.  
When calculating the length of your pole, remember to allow tolerance beyond the width of the frame for the curtains to stack back to the edge of the window.

Maximum Coverpole length in one piece 2.9m (114")\*.  
Poles exceeding the maximum length will be cut into equal parts unless otherwise specified.  
A joining bracket will need to be specified.

		
Size	Maximum distance between brackets	Minimum bend radius
Round ø30mm (1 3⁄16") Hand Drawn/Rotary/Electric - Silent Gliss	1500mm (60")	R275mm (10 13⁄16")
Round ø38mm (1 1⁄2") Hand Drawn/Rotary/Electric - Silent Gliss	1500mm (60")	R275mm (10 13⁄16")
Round ø50mm (2") Hand Drawn/Rotary/Electric - Silent Gliss	1500mm (60")	R275mm (10 13⁄16")
Round ø38mm (1 1⁄2") Electric - Lutron	1500mm (60")	R275mm (10 13⁄16")
Round ø50mm (2") Electric - Lutron	1500mm (60")	R275mm (10 13⁄16")

Bay options



**Bay bend**  
Coverpole and track may be bent to shape, allowing the gliders or rollers to travel through the bend.



**Mitred corner**  
Coverpole and track may be mitred for a sharper look on Hand drawn, although gliders and rollers cannot travel through the mitre. For Rotary Drive and Electric options only the coverpole can be mitred.



Pictured - ø25mm (1") Classic French pole • Flint - Satin

# FRENCH

A simple and sophisticated way to adorn windows, french poles follow the traditional returning curve of antique French hardware.





# FRENCH CURVES

Simplicity can be stunning

Pictured - ø25mm (1") Modern French pole with return bends • Waxed  
Interior design by Nelson Design Limited - London - UK

# IN DETAIL

Pole diameters - Ø25mm (1")

- Unlimited system length◇
- Choice of classic and modern bracket styles
- Modern offset bracket design for fitting close to ceiling
- Projection options - 100mm (4") • 140mm (5½")
- Centre & passing brackets available for long runs
- Double pole option - **F**Ø25mm (1") • **B**Ø19mm (¾")
- Lined ring & passing ring
- Can be used for bay applications



Single bracket with classic design



Single bracket with modern offset design option



Double pole option



100mm (4") & 140mm (5½") projection options



Mid brackets for longer lengths



Passing system



Bay applications

◇ Supplied in sections - Maximum section per length 4.0m (157")  
Lengths over 2.4m (94") will incur a handling charge

For minimum projections, technical information, sizes and weights please download the specification guide - [www.bradleycollection.com/specification-guides/](http://www.bradleycollection.com/specification-guides/)

# FINISHES

Coat options Matte (M) • Satin (S) • Gloss (G)



Cloud (M-S-G)



Ceramic (M-S-G)



Bone (M-S-G)



Cream (M-S-G)



Parchment (M-S-G)



Barley (M-S-G)



Dove (M-S-G)



Millstone (M-S-G)



Clay (M-S-G)



Cocoa (M-S-G)



Alabaster (M-S-G)




Dusk (M-S-G)



Granite (M-S-G)



Slate (M-S-G)



Flint (S-G)



Platinum (S-G)




Champagne (S-G)




Gold (S-G)



Cognac (S-G)



Gunmetal (S-G)



Waxed



Polished



Brass Toned



Polished Copper Tint



Bronzed



Oil Rubbed



Polished Nickel+Ⓢ

Due to printing limitations colours in this brochure may not be accurate  
samples are available on request - [www.bradleycollection.com/samples/](http://www.bradleycollection.com/samples/)

M Matte finishes have a maximum section length of 2.4m (94")

+ A finishing charge will apply  
Ⓢ Longer lead-times will apply






# BRACKETS

## Single Brackets





Classic End	Modern End	Diameter	Projection from wall to pole centre	Classic fixing plate size	Modern fixing plate size
		ø25mm (1")	100mm (4"), 140mm (5½")	w30mm (1¾") x H80mm (3⅛")	w26mm (1") x H80mm (3⅛")
Classic Mid	Modern Mid	Diameter	Projection from wall to pole centre	Classic fixing plate size	Modern fixing plate size
		ø25mm (1")	100mm (4"), 140mm (5½")	w60mm (2⅜") x H25mm (1")	w85mm (3⅜") x H33mm (1⅝")
Classic Passing	Modern Passing	Diameter	Projection from wall to pole centre	Classic fixing plate size	Modern fixing plate size
		ø25mm (1")	100mm (4"), 140mm (5½")	w60mm (2⅜") x H25mm (1")	w85mm (3⅜") x H33mm (1⅝")

## Double Brackets

End	Diameter	Projection from wall to pole centre	Fixing plate size
	Fø25mm (1") Bø19mm (¾")	F160mm (6⅝") B60mm (2⅜")	w63mm (2½") x H138mm (5⅞")
Mid	Diameter	Projection from wall to pole centre	Fixing plate size
	Fø25mm (1") Bø19mm (¾")	F160mm (6⅝") B60mm (2⅜")	w85mm (3⅜") x H33mm (1⅝")
Passing	Diameter	Projection from wall to pole centre	Fixing plate size
	Fø25mm (1") Bø19mm (¾")	F160mm (6⅝") B60mm (2⅜")	w85mm (3⅜") x H58mm (2¼")

# RINGS, POLES & ACCESSORIES

## Rings

Classic	Lined	Diameter	Classic ring drop from top of pole to bottom of ringlet	Lined ring drop from top of pole to bottom of ringlet
		ø19mm (¾") ø25mm (1")	44mm (1¾") 49mm (1⅞")	46mm (1⅓⅝") 51mm (2")
Classic Passing	Lined Passing	Diameter	Classic ring drop from top of pole to bottom of ringlet	Lined ring drop from top of pole to bottom of ringlet
		ø19mm (¾") ø25mm (1")	49mm (1⅞⅝") 54mm (2⅞")	46mm (1⅓⅝") 51mm (2")

## Poles

Poles are cut, bent and curved to suit individual requirements. When calculating the length of your pole, remember to allow tolerance beyond the width of the frame for the curtains to draw back to the edge of the window.

Maximum pole length in one piece 4.0m (157")\*. Poles exceeding the recommended maximum distance between brackets, will be cut into equal parts unless otherwise specified. Pole joiners will be supplied.

Diameter	Recommended maximum distance between brackets	Recommended curtain type for pole diameter	Minimum pole projection	Minimum bend radius
ø19mm (¾") ø25mm (1")	1800mm (71") 2000mm (79")	Light to medium weight, lined & non interlined curtains Medium weight, lined & interlined curtains	n/a 100mm (4")	Back pole only R50mm (2")

\*Section lengths over 2.4m (96") will incur a handling charge



Pictured - ø50mm (2") Pole • Templar • Clay • Gloss

# ELYSIAN

Elysian bridges the gap between two very different aesthetics, combining pared down modernist style with decorative sensibility.

Offered in an inspirational palette of solid and metallic finishes, Elysian is designed to perform in residential, hospitality and contract settings.



# DESIGN FUSION

Elysian delivers on functionality, whilst elevating drapery hardware to the level of high-end design statement

Pictured -  $\varnothing 30\text{mm}$  ( $1\frac{1}{16}"$ ) Pole • Charm • Flint • Gloss  
Shown with: James Hare • Simla Silk Fabric





Pictured - Ø30mm (1 3/16") Pole • Globe • Flint - Gloss  
Shown with: James Hare - Simla Silk Fabric

# IN DETAIL

Pole diameters - Ø30mm (1 3/16") • 50mm (2")

- Unlimited system length◇
- Easy install, drop-in brackets with magnetic cover plate
- Lined rings
- Passing system
- Bespoke bending service




Custom bending



Bracket design



Ombre



Draw rod



Transitional styling

◇ Supplied in sections - Maximum section length 4.0m (157") - Section lengths over 2.4m (94") will incur a handling charge



## FINISHES

An unparalleled selection of coated and plated finishes, allows Elysian to express emotions ranging from the sober and understated to the glamorous and flamboyant.

Coat options Matte (M) • Satin (S) • Gloss (G)



Cloud (M-S-G)



Ceramic (M-S-G)



Bone (M-S-G)



Cream (M-S-G)



Parchment (M-S-G)



Barley (M-S-G)




Dove (M-S-G)



Millstone (M-S-G)



Clay (M-S-G)



Cocoa (M-S-G)




Alabaster (M-S-G)




Dusk (M-S-G)



Granite (M-S-G)



Slate (M-S-G)



Flint (S-G)



Platinum (S-G)



Champagne (S-G)




Gold (S-G)



Cognac (S-G)



Gunmetal (S-G)



Polished Nickel<sup>+</sup>®

Pictured from left to right - ø50mm (2") • Templar • Champagne - Gloss • Gunmetal - Gloss • Gold - Gloss • Platinum - Gloss • Cognac - Gloss

Due to printing limitations colours in this brochure may not be accurate  
Samples are available on request - [www.bradleycollection.com/samples/](http://www.bradleycollection.com/samples/)

M Matte finishes have a maximum section length of 2.4m (94")

+ A finishing charge will apply  
® Longer lead-times will apply



Pictured - ø50mm (2") • Crystal Templar • Champagne - Gloss

## FINIALS

Traditional styling cues have been streamlined to suit modern living, resulting in the distinctive curvilinear character of Elysian.



### Halo

ø30mm (1<sup>3</sup>/<sub>16</sub>") Inclusive Length 5mm (3/<sub>16</sub>")  
ø50mm (2") Inclusive Length 2mm (1/<sub>16</sub>")



### Globe

ø30mm (1<sup>3</sup>/<sub>16</sub>") Inclusive Length 73mm (2<sup>7</sup>/<sub>8</sub>")  
ø50mm (2") Inclusive Length 114mm (4<sup>1</sup>/<sub>2</sub>")



### Templar

ø30mm (1<sup>3</sup>/<sub>16</sub>") Inclusive Length 79mm (3<sup>1</sup>/<sub>8</sub>")  
ø50mm (2") Inclusive Length 119mm (4<sup>11</sup>/<sub>16</sub>")



### Charm

ø30mm (1<sup>3</sup>/<sub>16</sub>") Inclusive Length 69mm (2<sup>11</sup>/<sub>16</sub>")  
ø50mm (2") Inclusive Length 117mm (4<sup>5</sup>/<sub>8</sub>")



### Crystal Globe<sup>✧</sup>

ø30mm (1<sup>3</sup>/<sub>16</sub>") Inclusive Length 73mm (2<sup>7</sup>/<sub>8</sub>")  
ø50mm (2") Inclusive Length 114mm (4<sup>1</sup>/<sub>2</sub>")



### Crystal Templar<sup>✧</sup>





ø30mm (1<sup>3</sup>/<sub>16</sub>") Inclusive Length 79mm (3<sup>1</sup>/<sub>8</sub>")  
ø50mm (2") Inclusive Length 119mm (4<sup>11</sup>/<sub>16</sub>")

✧ Crystal finials should not be positioned in direct sunlight  
For full technical information, sizes and weights please download the specification guide - [www.bradleycollection.com/specification-guides/](http://www.bradleycollection.com/specification-guides/)





# BRACKETS




## Single Brackets

<b>Side</b>	<b>Diameter</b> ø30mm (1 3/16") ø50mm (2")	<b>Projection from wall to pole centre</b> 100mm (4") 100mm (4")	<b>Fixing plate size</b> w40mm (1 9/16") x H86mm (3 3/8") w50mm (2") x H105mm (4 1/8")
			
<b>Mid</b>	<b>Diameter</b> ø30mm (1 3/16") ø50mm (2")	<b>Projection from wall to pole centre</b> 100mm (4") 100mm (4")	<b>Fixing plate size</b> w86mm (3 3/8") x H40mm (1 9/16") w105mm (4 1/8") x H50mm (2")
			
<b>Passing</b>	<b>Diameter</b> ø30mm (1 3/16") ø50mm (2")	<b>Projection from wall to pole centre</b> 100mm (4") 100mm (4")	<b>Fixing plate size</b> w86mm (3 3/8") x H40mm (1 9/16") w105mm (4 1/8") x H50mm (2")
			
<b>Recess with ring stop</b>	<b>Diameter</b> ø30mm (1 3/16") ø50mm (2")	<b>Depth off wall</b> 10mm (3/8") 15mm (9/16")	<b>Fixing plate size</b> ø40mm (1 9/16") ø64mm (2 1/2")
			




## Ceiling Brackets

<b>Ceiling</b>	<b>Diameter</b> ø30mm (1 3/16") ø50mm (2")	<b>Drop from ceiling to pole centre</b> 100mm (4") 100mm (4")	<b>Fixing plate size</b> w86mm (3 3/8") x H40mm (1 9/16") w105mm (4 1/8") x H50mm (2")
			
<b>Passing</b>	<b>Diameter</b> ø30mm (1 3/16") ø50mm (2")	<b>Drop from ceiling to pole centre</b> 100mm (4") 100mm (4")	<b>Fixing plate size</b> w86mm (3 3/8") x H40mm (1 9/16") w105mm (4 1/8") x H50mm (2")
			

## Double Brackets


<b>Side</b>	<b>Diameter</b> Fø50mm (2") Bø30mm (1 3/16")	<b>Projection from wall to pole centre</b> F200mm (8") B60mm (2 3/8")	<b>Fixing plate size</b> w50mm (2") x H105mm (4 1/8")
			
<b>Mid</b>	<b>Diameter</b> Fø50mm (2") Bø30mm (1 3/16")	<b>Projection from wall to pole centre</b> F200mm (8") B60mm (2 3/8")	<b>Fixing plate size</b> w105mm (4 1/8") x H50mm (2")
			
<b>Passing</b>	<b>Diameter</b> Fø50mm (2") Bø30mm (1 3/16")	<b>Projection from wall to pole centre</b> F200mm (8") B60mm (2 3/8")	<b>Fixing plate size</b> w105mm (4 1/8") x H73mm (2 7/8")
			


## Adjustable Brackets

<b>Side</b>	<b>Diameter</b> ø30mm (1 3/16") ø50mm (2")	<b>Projection from wall to pole centre</b> Min. 100mm (4") Max. 170mm (6 11/16") Min. 100mm (4") Max. 170mm (6 11/16")	<b>Fixing plate size</b> w40mm (1 9/16") x H86mm (3 3/8") w50mm (2") x H105mm (4 1/8")
			
<b>Mid</b>	<b>Diameter</b> ø30mm (1 3/16") ø50mm (2")	<b>Projection from wall to pole centre</b> Min. 100mm (4") Max. 170mm (6 11/16") Min. 100mm (4") Max. 170mm (6 11/16")	<b>Fixing plate size</b> w86mm (3 3/8") x H40mm (1 9/16") w105mm (4 1/8") x H50mm (2")
			
<b>Passing</b>	<b>Diameter</b> ø30mm (1 3/16") ø50mm (2")	<b>Projection from wall to pole centre</b> Min. 100mm (4") Max. 170mm (6 11/16") Min. 100mm (4") Max. 170mm (6 11/16")	<b>Fixing plate size</b> w86mm (3 3/8") x H40mm (1 9/16") w105mm (4 1/8") x H50mm (2")
			

# RINGS, POLES & ACCESSORIES

## Lined Rings

Ring	Diameter	Ring drop from top of pole to bottom of ringlet
	ø30mm (1 3/16")	51mm (2")
	ø50mm (2")	80mm (3 1/8")

Passing Ring	Diameter	Ring drop from top of pole to bottom of ringlet
	ø30mm (1 3/16")	51mm (2")
	ø50mm (2")	80mm (3 1/8")

## Poles

Poles are cut, bent and curved to suit individual requirements.  
When calculating the length of your pole, remember to allow tolerance beyond the width of the frame for the curtains to draw back to the edge of the window.

Maximum pole length in one piece 4.0m (157")\*.  
Poles exceeding the recommended maximum distance between brackets, will be cut into equal parts unless otherwise specified. Pole joiners will be supplied.

Diameter	Recommended maximum distance between brackets	Recommended curtain type for pole diameter	Minimum bend radius
ø30mm (1 3/16")	2100mm (83")	Medium weight, lined & interlined curtains	⌀255mm (10")
ø50mm (2")	2400mm (96")	Heavy weight interlined curtains	⌀255mm (10")

## Ombres



Internal projection from wall: 150mm (7 7/8")  
Fixing plate size: ø68mm (2 11/16")

## Hold back





Internal measurement: 137mm (5 3/8")  
Fixing plate size: ø44mm (1 3/4")

## Tie Back Hook



Projection: 29mm (1 1/8")  
Fixing plate size: w25mm (1") x h74mm (2 15/16")

## Draw Rods

Fine	Standard
	

Draw rod length:  
1000mm (39 3/8")  
Custom lengths available to order





Pictured - ø50mm (2") Pole • Jacobean Oak • Ribbed Spheret • Aged Brass  
Interior design by Susan Corson Designs - Massachusetts - USA •  
Photo © Danielle Robertson

# BAROCO

Baroco delivers the dramatic and ornate on a grand scale, with exquisite classical styling, hand crafting of traditional materials and hand finishing throughout.

For full details of the collection visit  
[www.bradleycollection.com/baroco](http://www.bradleycollection.com/baroco)



**Web** [www.bradleycollection.com](http://www.bradleycollection.com)

**Email** [info@bradleycollection.com](mailto:info@bradleycollection.com)

**Follow us on**



**Visit us** The Silk Gallery • Ground Floor • Centre Dome • Design Centre - Chelsea Harbour  
Lots Road • London • SW10 0XE  
Telephone +44 (0)20 7351 1790

#### **World**

**The Bradley Collection Ltd** • Lion Barn • Maitland Road • Needham Market • Suffolk • IP6 8NS • UK  
Telephone +44 (0)1449 722 724 Fax +44 (0)1449 722 728

#### **USA & Canada**


**The Bradley Collection Inc.** • 3625 Hayden Avenue, #E • Culver City • CA • 90232 • USA  
Telephone +1 (310) 815 8255 Fax +1 (310) 815 9255

Thanks to James Hare • Lewis & Wood

Specialised fixings for mounting brackets will be required in certain situations and are not provided as standard.  
Steel items are not recommended for damp conditions such as shower rooms. • Crystal finials should not be positioned in direct sunlight.

The Bradley Collection reserves the right to modify design and materials without prior notice as part of a process of continual product improvement.  
Due to printing limitations, colours in this brochure may not be accurate.

Products are protected by Design Rights, under provisions of Copyright, Designs & Patents Act 1988.

Bradley®, The Bradley Collection® and  Logo are registered Community trademarks of The Bradley Collection Ltd. in Europe and registered trademarks of the Bradley Collection, Inc. in the USA.