



## CONTACT

Web [www.bradleycollection.com](http://www.bradleycollection.com)

Email [info@bradleycollection.com](mailto:info@bradleycollection.com)

Follow     

## WORLD

**The Bradley Collection Ltd**

Lion Barn • Maitland Road

Needham Market • Suffolk

IP6 8NS • UK

Telephone +44 (0)1449 722 72

Fax +44 (0)1449 722 728

## USA & Canada

**The Bradley Collection Inc.**

3625 Hayden Avenue, Suite E

Culver City • CA • 90232 • USA

Telephone 1 (310) 815 8255

Fax 1 (310) 815 9255

the**bradley**collection

STAINLESS

EDITION SEVEN

19|20

Specialised fixings for mounting brackets will be required in certain situations and are not provided as standard.  
Steel items are not recommended for damp conditions such as shower rooms.  
Crystal finials and acrylic poles should not be positioned in direct sunlight, and are not suitable for use in conservatories.  
Brass items are supplied unlacquered and will tarnish over time.

The Bradley Collection reserves the right to modify design and materials without prior notice as part of a process of continual product improvement. Due to printing limitations, colours in this brochure may not be accurate.

Products are protected by Design Rights, under provisions of Copyright, Designs & Patents Act 1988.

Bradley®, The Bradley Collection® and  Logo are registered Community trademarks of The Bradley Collection Ltd. In Europe and registered trademarks of the Bradley Collection, Inc. in the USA.

Printed 0819 • Copyright © The Bradley Collection Ltd. 2019



**Pictured:** ø50mm (2") Pole • Stud • Brushed Stainless  
**Interior design:** Bayon Design Studio Inc - California - USA

# STAINLESS

The modernist stainless collection is a perfect example of form following function. the design language is pure and simple, with sharp linear forms resulting from the machining process.

The brushed and mirrored surface finishes, combined with subtle tinting technology emphasise the innate qualities of the high grade stainless steel used throughout.

# REFINED AND RESILIENT

High grade stainless steel in this collection works for wet rooms, coastal settings and outdoors.

Pictured: ø38mm (1 1/2") Pole • Squat Disc • Brushed Carbon Tint  
Shown with: Lewis & Wood - Skittery Linen





**Pictured:** ø25mm (1") Pole • Octagon Stud • Brushed Brass Tint  
**Shown with:** Lewis & Wood - Linen Taffeta

## IN DETAIL

Pole diameters - Ø19mm (¾") • 25mm (1") • 38mm (1½") • 50mm (2")  
 Acrylic pole diameters - Ø50mm (2")


- Unlimited system length ◊
- Easy install, drop-in brackets with magnetic cover plate
- Lined rings in stainless steel on all diameters
- Passing system
- Bespoke bending and curving service
- Can be specified for wet room/outdoor use ☼
- 50mm (2") Acrylic pole option ☼

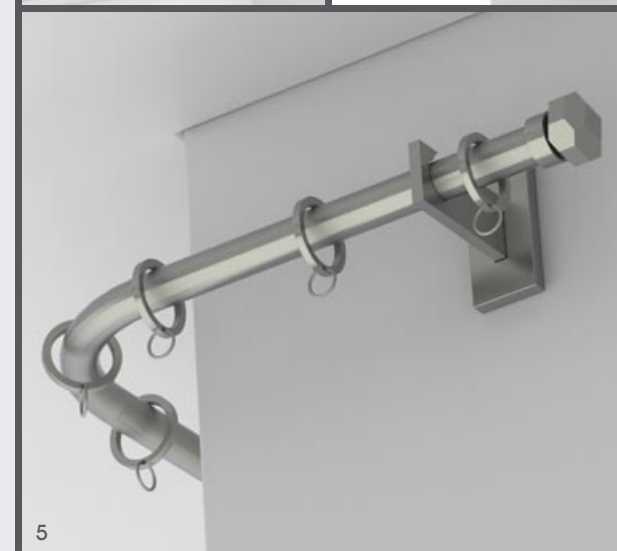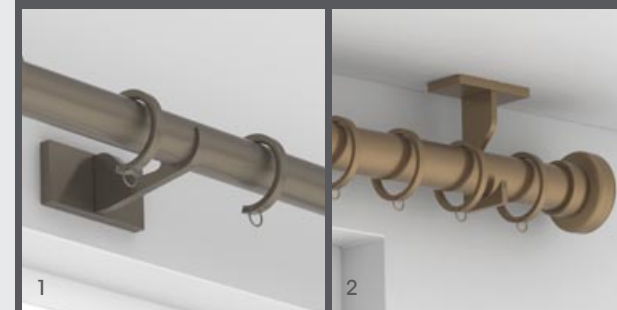

- 1 Passing system
- 2 Ceiling brackets
- 3 Double brackets
- 4 Drapery arm
- 5 Custom bending
- 6 Acrylic pole option

◊ Supplied in sections - Maximum section per length 2.4m (94")  
 ☼ Acrylic poles should not be positioned in direct sunlight, and are not suitable for use in conservatories or outdoors

# FINISHES

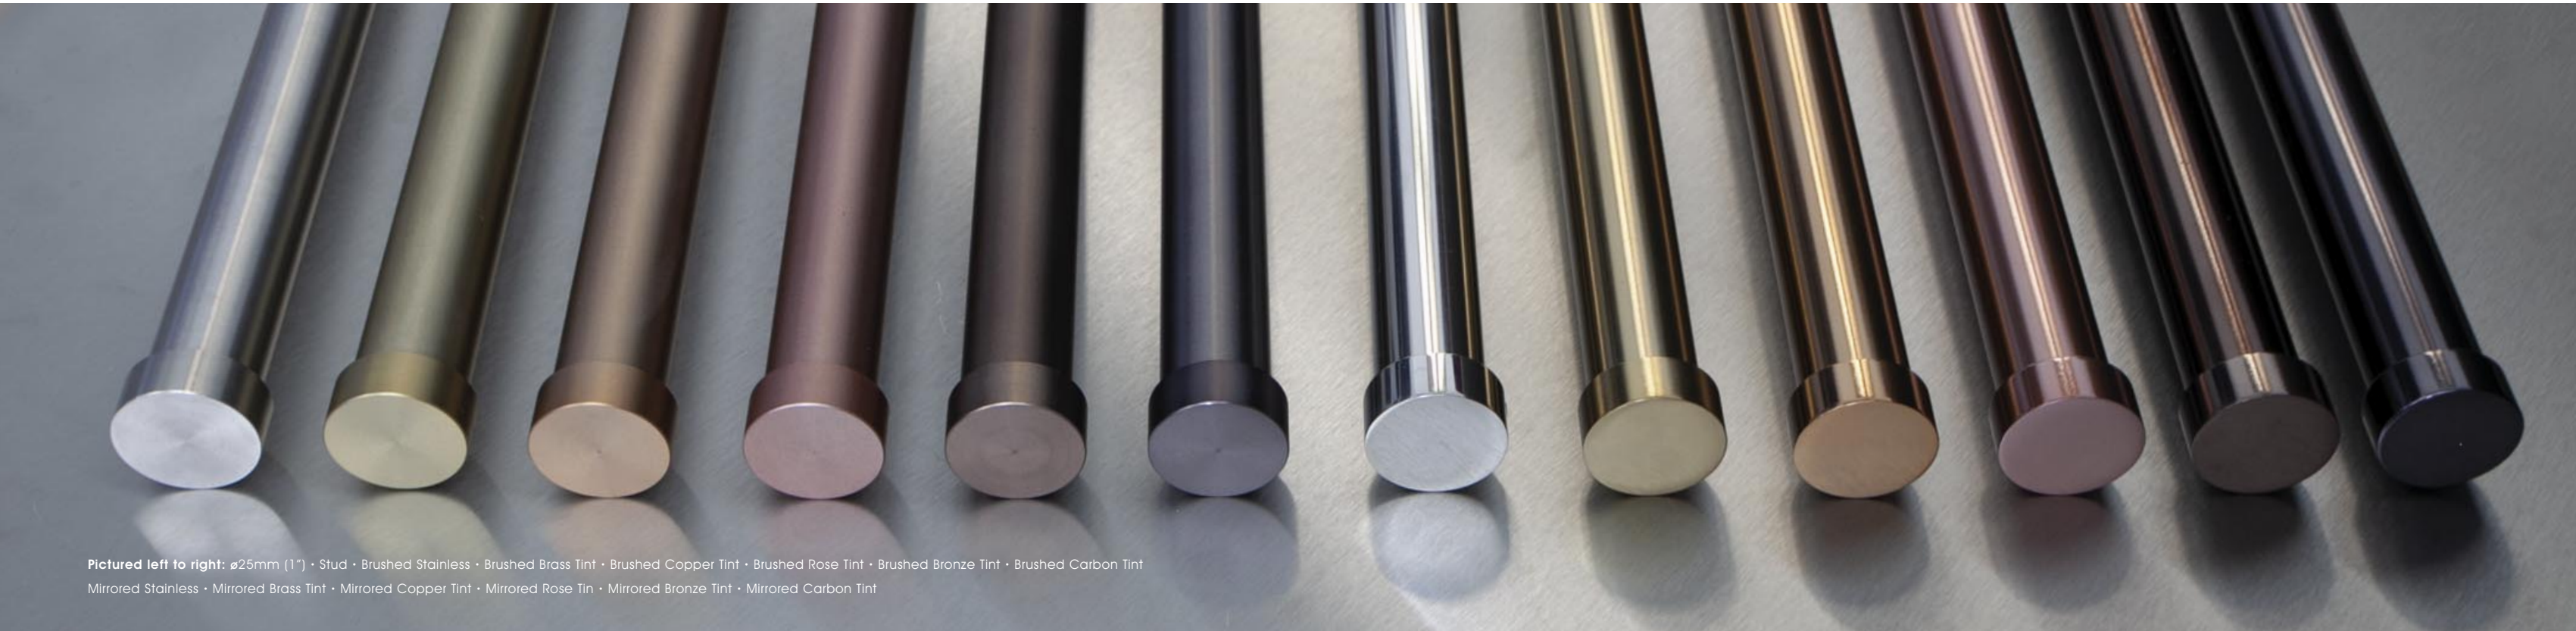


**Pictured left to right:** ø25mm (1") • Stud • Brushed Stainless • Brushed Brass Tint • Brushed Copper Tint • Brushed Rose Tint • Brushed Bronze Tint • Brushed Carbon Tint  
Mirrored Stainless • Mirrored Brass Tint • Mirrored Copper Tint • Mirrored Rose Tint • Mirrored Bronze Tint • Mirrored Carbon Tint


The renowned qualities of authentic stainless steel are emphasised by either a brushed or polished surface treatment, while a unique tinting process brings exciting new opportunities for modern design schemes.

An acrylic pole is now available, to be specified with stainless components.


## Brushed

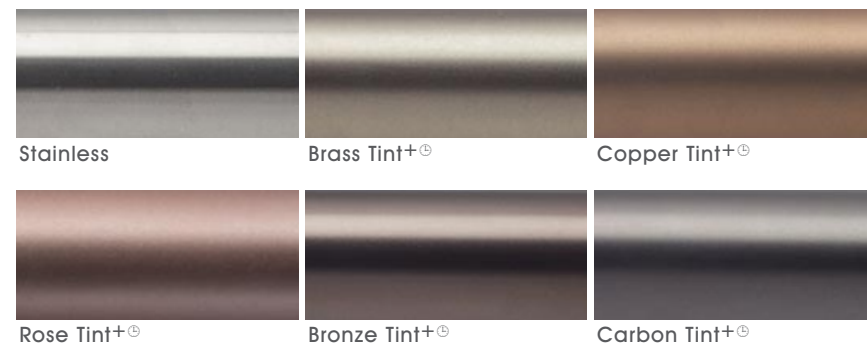

## Mirrored

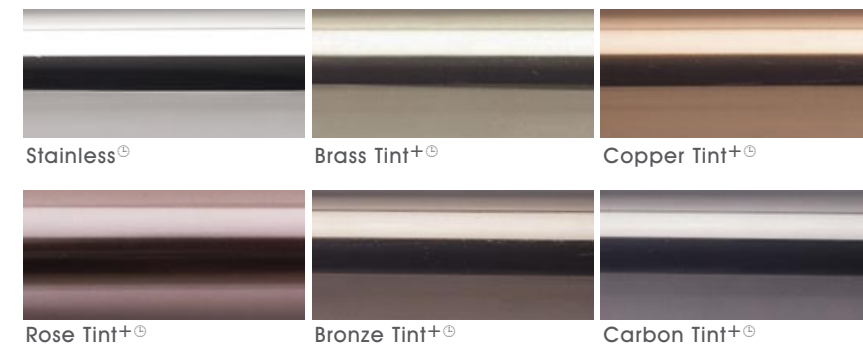

## Acrylic Pole



Due to printing limitations colours in this brochure may not be accurate  
Samples are available on request - [www.bradleycollection.com/samples/](http://www.bradleycollection.com/samples/)

+ A finishing charge will apply    ⊕ Longer lead-times will apply    ⊗ Acrylic poles should not be positioned in direct sunlight, and are not suitable for use in conservatories or outdoors

# FINIALS

Modern, linear forms presented in brushed and mirrored finishes.

Pictured left to right: ø25mm (1") • Disc • Brushed Stainless • Octagon Stud • Brushed Carbon Tint Knurled Stud • Brushed Brass Tint • Large Disc • Brushed Copper Tint • Faceted Disc • Mirrored Stainless Ball • Brushed Bronze Tint • Squat Disc • Mirrored Brass Tint • Stud • Brushed Rose Tint



## Stud

- ø19mm (3/4") Inclusive Length 2mm (1/16")
- ø25mm (1") Inclusive Length 3mm (1/8")
- ø38mm (1 1/2") Inclusive Length 3mm (1/8")
- ø50mm (2") Inclusive Length 4mm (3/16")



## Knurled Stud

- ø19mm (3/4") Inclusive Length 5mm (3/16")
- ø25mm (1") Inclusive Length 7mm (1/4")
- ø38mm (1 1/2") Inclusive Length 7mm (1/4")
- ø50mm (2") Inclusive Length 9mm (3/8")



## Octagon Stud

- ø19mm (3/4") Inclusive Length 7mm (1/4")
- ø25mm (1") Inclusive Length 10mm (3/8")
- ø38mm (1 1/2") Inclusive Length 11mm (7/16")
- ø50mm (2") Inclusive Length 14mm (9/16")



## Squat Disc

- ø19mm (3/4") Inclusive Length 17mm (11/16")
- ø25mm (1") Inclusive Length 23mm (7/8")
- ø38mm (1 1/2") Inclusive Length 33mm (1 5/16")
- ø50mm (2") Inclusive Length 44mm (1 3/4")



## Disc

- ø19mm (3/4") Inclusive Length 2mm (1/16")
- ø25mm (1") Inclusive Length 3mm (1/8")
- ø38mm (1 1/2") Inclusive Length 3mm (1/8")
- ø50mm (2") Inclusive Length 4mm (3/16")



## Large Disc

- ø19mm (3/4") Inclusive Length 4mm (3/16")
- ø25mm (1") Inclusive Length 4mm (3/16")
- ø38mm (1 1/2") Inclusive Length 6mm (1/4")
- ø50mm (2") Inclusive Length 6mm (1/4")



## Faceted Disc

- ø19mm (3/4") Inclusive Length 21mm (13/16")
- ø25mm (1") Inclusive Length 28mm (1 1/8")
- ø38mm (1 1/2") Inclusive Length 41mm (1 5/8")
- ø50mm (2") Inclusive Length 54mm (2 1/8")







## Ball



- ø19mm (3/4") Inclusive Length 50mm (2")
- ø25mm (1") Inclusive Length 63mm (2 1/2")
- ø38mm (1 1/2") Inclusive Length 83mm (3 1/4")
- ø50mm (2") Inclusive Length 104mm (4 1/16")

## BRACKETS




## Single Brackets

<b>Side</b> 	<b>Diameter</b> ø19mm (3/4") ø25mm (1") ø38mm (1 1/2") ø50mm (2")	<b>Projection from wall to pole centre</b> 60mm (2 3/8"), 100mm (4") 60mm (2 3/8"), 100mm (4") 100mm (4") 100mm (4")	<b>Fixing plate size</b> w34mm (1 5/16") x h70mm (2 3/4") w34mm (1 5/16") x h70mm (2 3/4") w52mm (2 1/8") x h104mm (4 1/8") w52mm (2 1/8") x h104mm (4 1/8")
<b>Mid</b> 	<b>Diameter</b> ø19mm (3/4") ø25mm (1") ø38mm (1 1/2") ø50mm (2")	<b>Projection from wall to pole centre</b> 60mm (2 3/8"), 100mm (4") 60mm (2 3/8"), 100mm (4") 100mm (4") 100mm (4")	<b>Fixing plate size</b> w70mm (2 3/4") x h34mm (1 5/16") w70mm (2 3/4") x h34mm (1 5/16") w104mm (4 1/8") x h52mm (2 1/8") w104mm (4 1/8") x h52mm (2 1/8")
<b>Passing</b> 	<b>Diameter</b> ø19mm (3/4") ø25mm (1") ø38mm (1 1/2") ø50mm (2")	<b>Projection from wall to pole centre</b> 60mm (2 3/8"), 100mm (4") 60mm (2 3/8"), 100mm (4") 100mm (4") 100mm (4")	<b>Fixing plate size</b> w70mm (2 3/4") x h34mm (1 5/16") w70mm (2 3/4") x h34mm (1 5/16") w104mm (4 1/8") x h52mm (2 1/8") w104mm (4 1/8") x h52mm (2 1/8")
<b>Recess with ring stop</b> 	<b>Diameter</b> ø19mm (3/4") ø25mm (1") ø38mm (1 1/2") ø50mm (2")	<b>Depth off wall</b> 7mm (1/4") 8mm (5/16") 12mm (1/2") 15mm (9/16")	<b>Fixing plate size</b> ø26mm (1") ø34mm (1 5/16") ø49mm (1 15/16") ø64mm (2 1/2")



## Ceiling Brackets

<b>Ceiling</b> 	<b>Diameter</b> ø19mm (3/4") ø25mm (1") ø38mm (1 1/2") ø50mm (2")	<b>Drop from ceiling to pole centre</b> 60mm (2 3/8"), 100mm (4") 60mm (2 3/8"), 100mm (4") 100mm (4") 100mm (4")	<b>Fixing plate size</b> w70mm (2 3/4") x h34mm (1 5/16") w70mm (2 3/4") x h34mm (1 5/16") w104mm (4 1/8") x h52mm (2 1/8") w104mm (4 1/8") x h52mm (2 1/8")
<b>Passing</b> 	<b>Diameter</b> ø19mm (3/4") ø25mm (1") ø38mm (1 1/2") ø50mm (2")	<b>Drop from ceiling to pole centre</b> 60mm (2 3/8"), 100mm (4") 60mm (2 3/8"), 100mm (4") 100mm (4") 100mm (4")	<b>Fixing plate size</b> w70mm (2 3/4") x h34mm (1 5/16") w70mm (2 3/4") x h34mm (1 5/16") w104mm (4 1/8") x h52mm (2 1/8") w104mm (4 1/8") x h52mm (2 1/8")

## Double Brackets

<b>Side</b> 	<b>Diameter</b> Fø25mm (1") Bø19mm (3/4") Fø50mm (2") Bø25mm (1")	<b>Projection from wall to pole centre</b> F160mm (6 5/16") B60mm (2 3/8") F200mm (8") B60mm (2 3/8")	<b>Fixing plate size</b> w34mm (1 5/16") x h70mm (2 3/4") w52mm (2 1/8") x h104mm (4 1/8")
<b>Mid</b> 	<b>Diameter</b> Fø25mm (1") Bø19mm (3/4") Fø50mm (2") Bø25mm (1")	<b>Projection from wall to pole centre</b> F160mm (6 5/16") B60mm (2 3/8") F200mm (8") B60mm (2 3/8")	<b>Fixing plate size</b> w70mm (2 3/4") x h34mm (1 5/16") w104mm (4 1/8") x h52mm (2 1/8")
<b>Passing</b> 	<b>Diameter</b> Fø25mm (1") Bø19mm (3/4") Fø50mm (2") Bø25mm (1")	<b>Projection from wall to pole centre</b> F160mm (6 5/16") B60mm (2 3/8") F200mm (8") B60mm (2 3/8")	<b>Fixing plate size</b> w72mm (2 13/16") x h59mm (2 5/16") w52mm (2 1/8") x h104mm (4 1/8")

## Adjustable Brackets

<b>Side</b> 	<b>Diameter</b> ø19mm (3/4") ø25mm (1") ø38mm (1 1/2") ø50mm (2")	<b>Projection from wall to pole centre</b> Min.60mm (2 3/8") Max.170mm (6 11/16") Min.60mm (2 3/8") Max.170mm (6 11/16") Min.100mm (4") Max.170mm (6 11/16") Min.100mm (4") Max.170mm (6 11/16")	<b>Fixing plate size</b> w34mm (1 5/16") x h70mm (2 3/4") w34mm (1 5/16") x h70mm (2 3/4") w52mm (2 1/8") x h104mm (4 1/8") w52mm (2 1/8") x h104mm (4 1/8")
<b>Passing</b> 	<b>Diameter</b> ø19mm (3/4") ø25mm (1") ø38mm (1 1/2") ø50mm (2")	<b>Projection from wall to pole centre</b> Min.60mm (2 3/8") Max.170mm (6 11/16") Min.60mm (2 3/8") Max.170mm (6 11/16") Min.100mm (4") Max.170mm (6 11/16") Min.100mm (4") Max.170mm (6 11/16")	<b>Fixing plate size</b> w34mm (1 5/16") x h70mm (2 3/4") w34mm (1 5/16") x h70mm (2 3/4") w52mm (2 1/8") x h104mm (4 1/8") w52mm (2 1/8") x h104mm (4 1/8")


## Drapery Arm Drapery arms have been designed to work at dormer windows, doorways &amp; above beds

	<b>Diameter</b> ø25mm (1")	<b>Fixing plate size</b> w34mm (1 5/16") x h156mm (6 1/8")
---	-------------------------------	---

# RINGS, POLES & ACCESSORIES

## Lined Rings

Ring	Diameter	Ring drop from top of pole to bottom of ringlet
	ø19mm (3/4")	47mm (1 7/8")
	ø25mm (1")	55mm (2 1/8")
	ø38mm (1 1/2")	66mm (2 5/8")
	ø50mm (2")	80mm (3 1/8")


Passing Ring	Diameter	Ring drop from top of pole to bottom of ringlet
	ø19mm (3/4")	47mm (1 7/8")
	ø25mm (1")	55mm (2 1/8")
	ø38mm (1 1/2")	66mm (2 5/8")
	ø50mm (2")	80mm (3 1/8")



## Poles

Poles are cut, bent and curved to suit individual requirements. When calculating the length of your pole, remember to allow tolerance beyond the width of the frame for the curtains to draw back to the edge of the window.

Maximum pole length in one piece 2.4m (96"). Poles exceeding the recommended maximum distance between brackets, will be cut into equal parts unless otherwise specified. Pole joiners will be supplied.

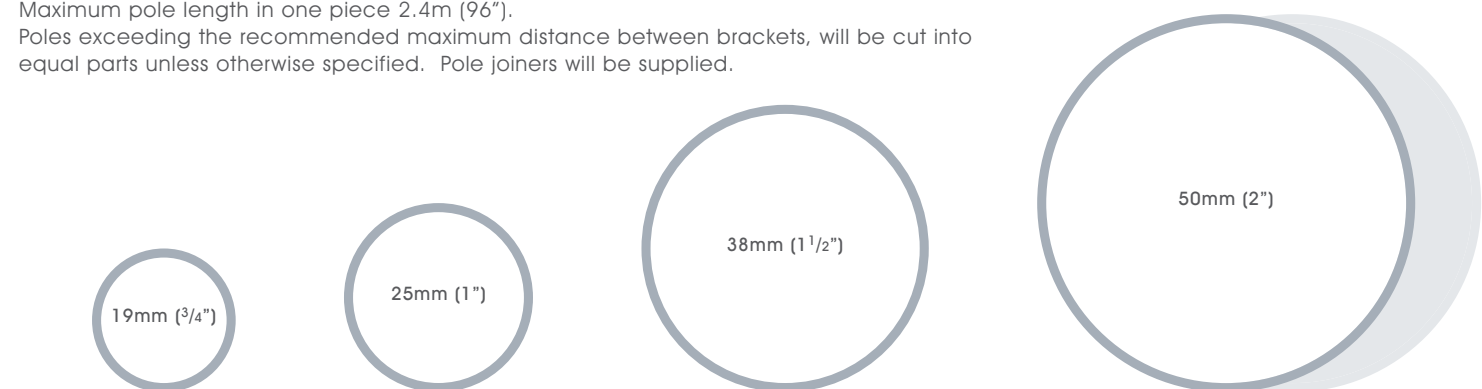

Diameter	Recommended maximum distance between brackets	Recommended curtain type for pole diameter	Minimum bend radius
ø19mm (3/4")	1800mm (71")	Light to medium weight, lined & non interlined curtains	R75mm (3")
ø25mm (1")	2000mm (79")	Medium weight, lined & interlined curtains	R100mm (4")
ø38mm (1 1/2")	2200mm (87")	Medium to heavy weight, lined & interlined curtains	R255mm (10")
ø50mm (2")	2400mm (96")	Heavy weight interlined curtains	R255mm (10")
ø50mm (2") Acrylic pole	1500mm (59")	Medium weight, lined & interlined curtains	R200mm (8")

## Ombres

### Small



Internal projection from wall: 150mm (5 7/8")  
Fixing plate size: ø19mm (3/4")

### Large



Internal projection from wall: 150mm (5 7/8")  
Fixing plate size: ø25mm (1")

## Hold back



Internal measurement: 137mm (5 3/8")  
Fixing plate size: ø44mm (1 3/4")

## Tie Back Hook



Projection: 29mm (1 1/8")  
Fixing plate size: w25mm (1") x h74mm (2 9/16")

## Draw Rods

### Fine



Draw rod length:  
1000mm (39 3/8")

### Standard



Custom lengths available to order

Acrylic poles should not be positioned in direct sunlight, and are not suitable for use in conservatories or outdoors. For full technical information, sizes and weights please download the specification guide - [www.bradleycollection.com/specification-guides/](http://www.bradleycollection.com/specification-guides/)