CONTACT

www.bradleycollection.com





UK & REST OF THE WORLD

← 44 (0)1449 722 724

√ info@bradleycollection.com

USA & CANADA

CEDIA MEMBER

thebradleycollection

Specialised fixings for mounting brackets will be required in certain situations and are not provided as standard. Steel items are not recommended for damp conditions such as shower rooms. Crystal finials and acrylic poles should not be positioned in direct sunlight, and are not suitable for use in conservatories. Fluid Metal items are supplied unlacquered and will tarnish over time.

The Bradley Collection reserves the right to modify design and materials without prior notice as part of a process of continual product improvement. Due to printing limitations, colours in this brochure may not be accurate.

Products are protected by Design Rights, under provisions of Copyright, Designs & Patents Act 1988. Bradley®, The Bradley Collection® and 🙆 Logo are registered Community trademarks of The Bradley Collection Ltd. in Europe and registered trademarks of the Bradley Collection, Inc. in the USA.

The Bradley Collection Ltd Lion Barn • Maitland Road • Needham Market • Suffolk • IP6 8NS • UK

Printed: 1122 • Copyright © The Bradley Collection Ltd. 2022





ELYSIAN

Elysian bridges the gap between two very different aesthetics, combining pared down modernist style with decorative sensibility.

Offered in an inspirational palette of solid and metallic finishes, Elysian is also now available in a wider selection of sizes.


Pictured: ø50mm (2") Pole · Templar · Clay - Gloss

ELYSIAN

DETAIL

Thoughtfully designed accessories improve functionality. of the system without compromising the aesthetic.





SCALE

Now available in three pole diameters Ø30mm ($1^{3}/_{16}$ ") • 38mm ($1^{1}/_{2}$ ") • 50mm (2"). Each component is carefully designed and scaled to reflect the design intent.



FUNCTION

A range of bracket options have been designed to allow easy installation. All wall & ceiling brackets have a magnetic cover plate to hide screw fixings. Brackets can also be supplied to custom lengths and designs.




LENGTH

Elysian can be cut to any length. Passing brackets & rings allow drapes to travel the full system length.



Elysian offers a bespoke bay bending and curving service to fit any bay window.



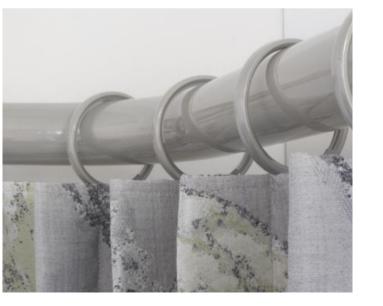

FINISHES

An unparalleled selection of coated and plated finishes, allows Elysian to express emotions ranging from the sober and understated to the glamorous and flamboyant.

Coat Options









FINISHES

FLUID METAL™

Light Bronze ⊕ ② ⊕ ●

Technology and aesthetics meet with Fluid Metals. A first for drapery hardware, this innovative specialist finishing technique allows authentic metal coatings to be applied onto any substrate. Elysian designs look stunning in these new metal coats.



Bronze Art ⊕ ② 🗗 🖤

ARCHITECTURAL METALLICS



 \odot A finishing charge will apply \odot Longer lead-times will apply \odot Fluid Metal finishes are supplied unlacquered and will tarnish over time, a clear lacquer may be applied on request as a custom finish

Fluid Metal finishes are hand produced, finish may vary.

78



FINIALS

Traditional styling cues have been streamlined to suit modern living, resulting in the distinctive curvilinear character of Elysian.



Halo

ø30mm (1³/₁₆") Inclusive Length 5mm (³/₁₆") ø38mm (11/2") Inclusive Length 2mm (1/16")

ø50mm (2") Inclusive Length 2mm (1/16")



For full technical information, sizes and weights please download the specification guide - www.bradleycollection.com/specification-guides/

Charm

ø30mm (1³/₁₆") Inclusive Length 69mm (2¹¹/₁₆") ø38mm (1¹/₂") Inclusive Length 85mm (3³/₈") ø50mm (2") Inclusive Length 117mm (4⁵/₈")

Pictured Top: ø50mm (2") • Charm • Champagne - Gloss Halo • Gold - Gloss • Squat Globe • Bronzed - Gloss Crystal Globe • Gunmetal - Gloss • Templar • Antique Brass - Gloss Flute • Pewter - Gloss • Globe • Platinum - Gloss Crystal Templar • Cognac - Gloss



Globe

 \emptyset 30mm (1³/₁₆") Inclusive Length 73mm (2⁷/₈") ø38mm (11/2") Inclusive Length 92mm (35/8") ø50mm (2") Inclusive Length 114mm (41/2")



Templar

ø30mm (1³/₁₆") Inclusive Length 79mm (3¹/₈") ø38mm (11/2") Inclusive Length 92mm (35/8") ø50mm (2") Inclusive Length 119mm (411/16")



Squat Globe

ø30mm (1³/16") Inclusive Length 53mm (2¹/16") ø38mm (11/2") Inclusive Length 63mm (21/2") ø50mm (2") Inclusive Length 81mm (3³/₁₆")



Crystal Globe*

ø30mm (1³/₁₆") Inclusive Length 73mm (2⁷/₈") ø38mm (1¹/₂") Inclusive Length 92mm (3⁵/₈") ø50mm (2") Inclusive Length 114mm (41/2")



Crystal Templar*

ø30mm (1³/₁₆") Inclusive Length 79mm (3¹/₈") ø38mm (1¹/₂") Inclusive Length 92mm (3⁵/₈") ø50mm (2") Inclusive Length 119mm (411/16")



Flute

ø30mm ($1^{3}/_{16}$ ") Inclusive Length 73mm ($2^{7}/_{8}$ ") ø38mm ($1^{1}/2^{"}$) Inclusive Length 69mm ($2^{11}/16^{"}$)

ø50mm (2") Inclusive Length 114mm (41/2")



Ribbed Globe

 \emptyset 30mm (1³/₁₆") Inclusive Length 73mm (2⁷/₈") ø38mm (11/2") Inclusive Length 92mm (35/8") ø50mm (2") Inclusive Length 114mm (41/2")



ø50mm (2") Inclusive Length 119mm (411/16")

SINGLE BRACKETS

Diameter ø30mm (13/16") ø38mm (11/2") ø50mm (2")

Projection from wall to pole centre 100mm (4") 100mm (4") 100mm (4")

Fixing plate size

w40mm (1°/₁₆") x **H**86mm (3³/₈") w50mm (2") x H105mm (41/8") w50mm (2") x H105mm (41/8")

Passing

Passina

Diameter ø30mm (13/16") ø38mm (11/2") ø50mm (2")

Diameter

ø30mm (13/16")

ø38mm (11/2")

ø50mm (2")

Projection from wall to pole centre

100mm (4") 100mm (4") Fixing plate size

w86mm (3³/₈") x H40mm (1⁹/₁₆") **w**105mm $(4^{1}/8'')$ x **H**50mm (2'') $w105mm (4^{1}/8") \times H50mm (2")$

Ceilina

Drop from ceiling to pole centre

100mm (4") 100mm (4") 100mm (4")

Depth off wall

Fixing plate size

w86mm (3³/₈") x **H**40mm (1⁹/₁₆") **w**105mm $(4^{1}/8'')$ x **H**50mm (2'')

w105mm $(4^{1}/8")$ x $\mu50$ mm (2")

RECESS BRACKETS

Recess with ring stop



Diameter

ø30mm (13/16") ø38mm (11/2") ø50mm (2")

10mm (3/8") 12mm (1/2") 15mm (⁹/₁₆")

ø49mm (115/16") ø64mm (21/2")

ø40mm (19/16")

Fixing plate size

ADJUSTABLE BRACKETS



Diameter

ø30mm (13/16") ø38mm (11/2") ø50mm (2")

Projection from wall to pole centre

Min. 100mm (4") Max. 170mm ($6^{11}/_{16}$ ") Min. 100mm (4") Max. 170mm (611/16") Min. 100mm (4") Max. 170mm (611/16")

Fixing plate size

w40mm (1°/16") x **H**86mm (33/8") **w**50mm (2") \times **H**105mm (4 $^{1}/_{8}$ ") **w**50mm (2") \times **H**105mm (4 $^{1}/_{8}$ ")

Passing



Diameter

ø30mm (13/16") ø38mm (11/2") ø50mm (2")

Min. 100mm (4") Max. 170mm (611/16") Min. 100mm (4") Max. 170mm (611/16") Min. 100mm (4") Max. 170mm (611/16")

Projection from wall to pole centre

Fixing plate size

w86mm ($3^3/8''$) x **H**40mm ($1^9/16''$) **w**105mm $(4^{1}/8'')$ x **H**50mm (2'')

w105mm $(4^{1}/8'')$ x **H**50mm (2'')

DOUBLE BRACKETS



Passina



Fø38mm (11/2")

Diameter

Projection from wall to pole centre Fø38mm (11/2") F200mm (8") Bø30mm (13/16")

B60mm (2³/₈") Fø50mm (2") F200mm (8") вø30mm (1³/16") **B**60mm (2³/₈")

Diameter Projection from wall to pole centre

вø30mm (1³/16") Fø50mm (2")

B60mm (2³/₈") F200mm (8") **B**60mm (2³/₈")

F200mm (8")

Mid Fixing plate size

Fixing plate size

w50mm (2") x н105mm (4¹/₈")

w50mm (2"). x

 $H105mm (4^{1}/8")$

 $w105mm (4^{1}/8") x$ н50mm (2")

w105mm (41/8") x н50mm (2")

Passing Fixing plate size w105mm (41/8") x.

w105mm (4¹/₈") x H73mm (2⁷/₈")

H73mm (27/8")

CUSTOM BRACKETS

Special projection brackets and specialist designs can be produced for awkward or unusual installations.









Custom Fixing Plate Relevant where space is restricted or weight is a concern.



Helps negotiate cornice and similar architectural features.



Angled Brackets The solution for tight and awkward locations

LINED RINGS

Ring

Passing Ring



sing Diameter

ø30mm (1³/₁₆") ø38mm (1¹/₂")

ø50mm (2")

Ring drop from top of pole to bottom of ringlet

51mm (2") 66mm (2⁵/₈)

80mm (31/8")

POLES

Poles are cut, bent and curved to suit individual requirements.


When calculating the length of your pole, remember to allow tolerance beyond the width of the frame for the curtains to draw back to the edge of the window.

Maximum pole length in one piece 4.0m (157"). ⊕

Poles exceeding the recommended maximum distance between brackets,

will be cut into equal parts unless otherwise specified.

Pole joiners will be supplied.

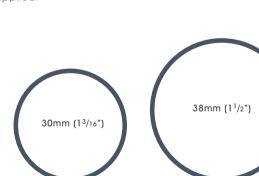

50mm (2")

Diameter

Recommended maximum distance between brackets 2100mm (83") 2200mm (87")

2400mm (96")

ø30mm (1³/16") ø38mm (1¹/2") ø50mm (2") Recommended curtain type for pole diameter

Medium weight, lined & interlined curtains

Medium to heavy weight, lined & interlined curtains

Heavy weight interlined curtains

Minimum bend radius R255mm (10") R255mm (10") R255mm (10")

ACCESSORIES

Ombres



Internal projection from wall: 150mm (5¹⁵/16")

Fixing plate size: ø68mm (2¹¹/16")

Hold back



Internal measurement: 137mm ($5^3/8''$) Fixing plate size: $\emptyset 44$ mm ($1^3/4''$)


Tie Back Hook



Projection: 29mm ($1^{1}/8^{n}$) **Fixing plate size:** w25mm (1^{n}) x μ 74mm ($2^{15}/18^{n}$)

Not recommended for use with passing rings.

Draw Rods®

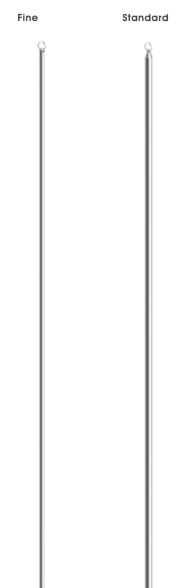

Draw rod length: 1000mm (39³/₈")

Custom lengths available to order