

CONTACT

www.bradleycollection.com



UK & REST OF THE WORLD

+44 (0)1449 722 724

info@bradleycollection.com

USA & CANADA

+1 (310) 815 8255

info.us@bradleycollection.com



CEDIA
MEMBER

the**bradley**collection

Specialised fixings for mounting brackets will be required in certain situations and are not provided as standard. Steel items are not recommended for damp conditions such as shower rooms. Crystal finials and acrylic poles should not be positioned in direct sunlight, and are not suitable for use in conservatories. Fluid Metal items are supplied unlacquered and will tarnish over time.

The Bradley Collection reserves the right to modify design and materials without prior notice as part of a process of continual product improvement. Due to printing limitations, colours in this brochure may not be accurate.

Products are protected by Design Rights, under provisions of Copyright, Designs & Patents Act 1988. Bradley®, The Bradley Collection® and  Logo are registered Community trademarks of The Bradley Collection Ltd. in Europe and registered trademarks of the Bradley Collection, Inc. in the USA.

The Bradley Collection Ltd Lion Barn • Maitland Road • Needham Market • Suffolk • IP6 8NS • UK

Printed: 0623 • Copyright © The Bradley Collection Ltd. 2023

EDITION 8
21 | 23

8 | THE BRADLEY COLLECTION

INSPIRING

Take a wander through our Look Book, to see some inspirational schemes from our clients around the world. All created using our unrivalled finish palette.

Then pause to enjoy a pivotal moment for high end curtain poles as luxury Fluid Metal finishes are unveiled.

This is truly transformative, as authentic real metal coatings may now be applied to any base material.

The creative opportunities are limitless.

LOOK BOOK
Page:1-24

GLIDERPOLE
Page:25-38

STEEL
Page:39-52

MIO
Page:53-68

ELYSIAN
Page:69-82

CONTOUR
Page:83-92

⚡ | ECLIPSE
Page:93-110

CONTOUR

Pictured: 50mm (2") Ribbed Ball • Bronze Art



GLIDERPOLE

Pictured: Round ø50mm (2") Gliderpole® - Hand Drawn - Squat Globe - Pewter - Gloss
Interior design: Susan Clark Interiors - UK www.susanclarkinteriors.com
Photography: Chris Snook • @snookphotography - www.chrissnookphotography.co.uk

STEEL

Pictured: ø25mm (1") Pole • Button Stud • Waxed
Interior design: Tanya Leech - BLID Interior Designer
Photography: Anya Rice

SOFT FOCUS

Stunning angles are enhanced by sharp lines of hardware but then are dressed softly with fine, fluid drapes.

A tranquil place.

GLIDERPOLE

Pictured: Round Ø30mm (1 1/16") Gliderpole® - Hand Drawn • End Cap • Millstone - Matte

Interior design: Jim Davis Designs - USA www.jimdavisdesigns.com





GLIDERPOLE

Pictured: Round ø50mm (2") Gliderpole® - Hand Drawn • Halo • Champagne - Satin

Window treatments: Bryant Furnishing - Bournemouth - UK

Photography: Harbour View Photography



ECLIPSE
Pictured: ø38mm (1½") Coverpole • Standard Stud • Brass Toned
Project by: Gallagher London - London SW7 - UK



GLIDERPOLE

Pictured: Round ø30mm (1 1/8") Gliderpole® - Hand Drawn - Charm - Gold - Gloss

Interior design: EMR Architecture - London - UK

Curtain design: Ma Maison Design • @ma_maison_design - London - UK



TONAL

Carefully layered colours create harmony and calm.

A gorgeous bay window becomes a haven; a place to live.

The curtain pole is subtle and perfectly understated.



MIO

Pictured: ø38mm (1 1/2") • Disc • Barley - Matte

Curtain design: Village Blinds • @villageblindslondon - London - UK

Photography: Chris Snook • @snookphotography - www.chrissnookphotography.co.uk



GLIDERPOLE

Pictured: Round Ø50mm (2") - Round Ø30mm (1 1/4") Gliderpole® - Hand Drawn • Flush Stud • Gunmetal • Satin
Rocco Forte • The Balmoral - Glamis Suite

MINIMAL

A perimeter of glass bringing the outside in.

A symbiosis.

But we still need cool in the heat, warmth in the winter and privacy all year round.

GLIDERPOLE

Pictured: Flat #36mm (1 7/16") Gliderpole® - Hand Drawn - Flush End Cap - Bone - Satin
Curtain design: Erik Bruce - @erikbrucestudio - New York - USA





MIO

Pictured: ø25mm (1") Pole • Brushed Stainless
Curtain design: Erik Bruce • @erikbrucestudio - New York - USA
Design/Architect: Steven Learner Studio
Photography: Tam Powel



GLIDERPOLE

Pictured: Round ø30mm (1 1/8") Gliderpole - Hand Drawn - Flush Stud - Flint - Satin
Interior Design: Pelham Design
Soft Furnishings: SZH Interiors



ELEGANT CURVES

Stunning architectural details sometimes present challenges.

Here, perfectly curved hardware has been created to accentuate the elegant curves of the room, whilst allowing the light to flood in.



STEEL

Pictured: ø25mm (1") Pole • Pebble • Brass Toned

Designer: Katie Sloan Interiors, Edinburgh - UK



GLIDERPOLE®

This sophisticated collection is the epitome of modern living. The design is sharp, streamlined and purposeful, whilst the choice of colour and finish ensures a truly individual result.

Pictured: Round ø50mm (2") Gliderpole® - Corded • Flush End Cap • Gold - Gloss

Interior styling & decoration: Dilly Orme @dillyorme

Photography: David Parmiter @davidparmiterphotography

HAND DRAWN

The smooth running hand drawn option is available in four styles; Square • Flat • Ø30mm (1 3/16") • 50mm (2"). All benefit from the new thoughtful detailing of concealed end stops.



CORDED

The innovative, embedded cording solution is available in three options, Square • Ø30mm (1 3/16") • 50mm (2"). All options allow a single or a twin cord which sits discreetly behind the curtain. A colour coordinated metal cord retainer is supplied as standard, for child safety.




LENGTH

Gliderpole can be supplied to any length[©] allowing the curtains to travel freely across even the longest systems.




WAVE®

The ubiquitous Wave® heading is accommodated through all Gliderpole options.

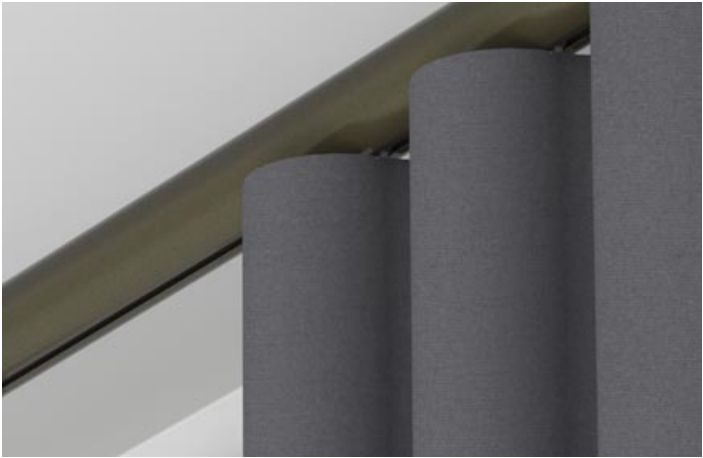


HEAVY DUTY

New Heavy Duty face fixed brackets and improved adjustable brackets have been added to allow easy installation even in challenging situations. Wall brackets have a magnetic cover plate for hidden fixings. Brackets can also be supplied to custom lengths and designs.

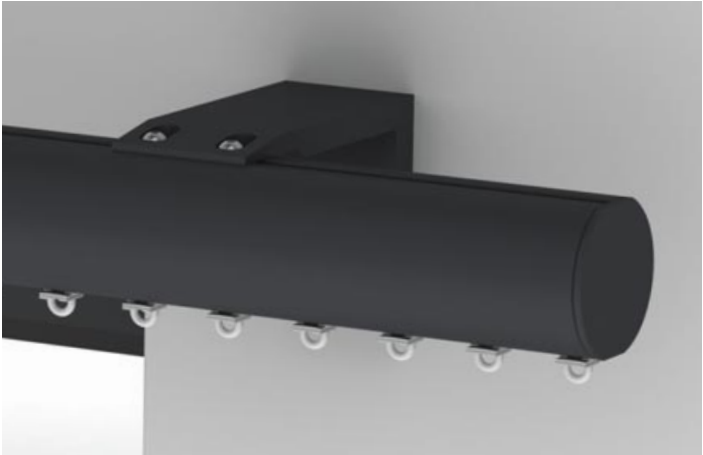

BENT TO SHAPE

Gliderpole is the optimal solution for bends and curves. Precision bending and smooth running gliding systems combine to provide superb functionality.

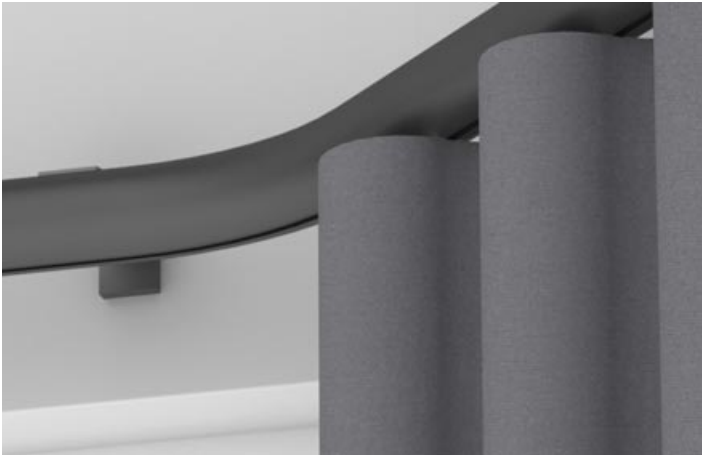



Pictured left to right:
Round ø50mm (2") Gliderpole® - Hand Drawn • Flush End Cap • Millstone Matte
Round ø30mm (1 1/16") Gliderpole® - Hand Drawn • Flush End Cap • Dove - Matte
Square H27mm (1 1/16") Gliderpole® - Hand Drawn • Flush End Cap • Mineral - Matte
Flat H36mm (1 1/16") Gliderpole® - Hand Drawn • Flush End Cap • Bone - Matte

FINISHES

This stunning palette of colours and finishes is available on all Gliderpoles and components, with a choice of coat options throughout.

Coat Options



Cloud M S G	Barley M S G	Bone M S G	Cream M S G	Parchment M S G
Mineral M S G	Dove M S G	Millstone M S G	Clay M S G	Cocoa M S G
Alabaster M S G	Dusk M S G	Ceramic M S G	Slate M S G	Flint M S G
Damson M S G	Moss M S G	Smoke M S G	Frame Grey M S G	Raven M S G
Platinum S G	Champagne S G	Gold S G	Cognac S G	Gunmetal S G
Pewter S G	Antique Brass S G	Bronzed S G	Natural Silver	

Due to printing limitations colours in this brochure may not be accurate
Samples are available on request - www.bradleycollection.com/samples/



Pictured: Round Ø50mm (2") Gliderpole® - Hand Drawn • Flush Stud • Old Brass

Due to printing limitations colours in this brochure may not be accurate.
Samples are available on request - www.bradleycollection.com/samples/


FINISHES

FLUID METAL™

At the cutting edge of metal finishing sits Fluid Metal. A first for drapery hardware, this innovative specialist finishing technique allows authentic metal coatings to be applied onto any substrate. For the first time, a brass or bronze coated Gliderpole becomes a reality.



Old Silver ⊕⊕⊕👤 Old Pewter ⊕⊕⊕👤 Old Brass ⊕⊕⊕👤




Light Bronze ⊕⊕⊕👤 Bronze Art ⊕⊕⊕👤

ARCHITECTURAL METALLICS



Dawn Mist Sunset



Night Sky Midnight

POLE ONLY FINISH



Bright Aluminium ⊕⊗

FINIAL & BRACKET ONLY FINISH



Polished Nickel ⊕⊕

⊕ A finishing charge will apply ⊗ Longer lead-times will apply ⊗ Not available on Square or 50mm (2") poles
⊕ Fluid Metal finishes are supplied unlacquered and will tarnish over time, a clear lacquer may be applied on request as a custom finish 👤 Fluid Metal finishes are hand produced, finish may vary.

FINIALS

This design edit allows Gliderpole to express different personalities, from the minimalist to the flamboyant.

For even greater choice, finial designs from the Mio Collection may also be specified.



Flush End Cap - Supplied as standard

Square H27mm (1 1/16") Inclusive Length 3mm (1/8")
Flat H36mm (1 7/16") Inclusive Length 3mm (1/8")
Round ø30mm (1 3/16") Inclusive Length 3mm (1/8")
Round ø50mm (2") Inclusive Length 3mm (1/8")




Stud

Round ø30mm (1 3/16") Inclusive Length 12mm (1/2")
Round ø50mm (2") Inclusive Length 18mm (1 1/16")



Pebble

Round ø30mm (1 3/16") Inclusive Length 42mm (1 5/8")
Round ø50mm (2") Inclusive Length 68mm (2 11/16")



Flush Stud

Square H27mm (1 1/16") Inclusive Length 12mm (1/2")
Flat H36mm (1 7/16") Inclusive Length 12mm (1/2")
Round ø30mm (1 3/16") Inclusive Length 12mm (1/2")
Round ø50mm (2") Inclusive Length 18mm (1 1/16")



Disc

Round ø30mm (1 3/16") Inclusive Length 12mm (1/2")
Round ø50mm (2") Inclusive Length 18mm (1 1/16")



Ball

Round ø30mm (1 3/16") Inclusive Length 66mm (2 5/8")
Round ø50mm (2") Inclusive Length 112mm (4 7/16")



Halo

ø30mm (1 3/16") Inclusive Length 5mm (3/16")
ø50mm (2") Inclusive Length 2mm (1/16")



Globe

ø30mm (1 3/16") Inclusive Length 73mm (2 7/8")
ø50mm (2") Inclusive Length 114mm (4 1/2")




Ribbed Globe

ø30mm (1 3/16") Inclusive Length 73mm (2 7/8")
ø50mm (2") Inclusive Length 114mm (4 1/2")



Templar

ø30mm (1 3/16") Inclusive Length 79mm (3 1/8")
ø50mm (2") Inclusive Length 119mm (4 11/16")

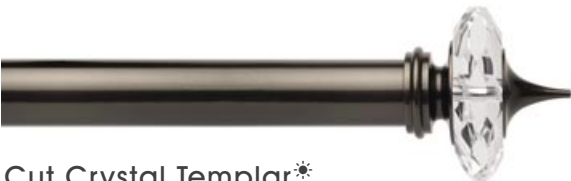

Cut Crystal Templar*

ø50mm (2") Inclusive Length 119mm (4 11/16")



Squat Globe

ø30mm (1 3/16") Inclusive Length 53mm (2 1/8")
ø50mm (2") Inclusive Length 81mm (3 3/16")



Crystal Globe*

ø30mm (1 3/16") Inclusive Length 73mm (2 7/8")
ø50mm (2") Inclusive Length 114mm (4 1/2")



Flute

ø30mm (1 3/16") Inclusive Length 73mm (2 7/8")
ø50mm (2") Inclusive Length 114mm (4 1/2")



Crystal Templar*

ø30mm (1 3/16") Inclusive Length 79mm (3 1/8")
ø50mm (2") Inclusive Length 119mm (4 11/16")







Charm


ø30mm (1 3/16") Inclusive Length 69mm (2 11/16")
ø50mm (2") Inclusive Length 117mm (4 5/8")


*: Crystal Finials should not be positioned in direct sunlight

SINGLE BRACKETS


Side	Mid	Diameter	Projection from wall to pole centre	Side Fixing plate size	Mid Fixing plate size
		Square H27mm (1 1/16")	60mm (2 3/8"), 100mm (4")	w32mm (1 1/4") x H70mm (2 3/4")	w32mm (1 1/4") x H38mm (1 1/2")
		Flat H36mm (1 7/16")	60mm (2 3/8"), 100mm (4")	w32mm (1 1/4") x H70mm (2 3/4")	w32mm (1 1/4") x H38mm (1 1/2")
		Round ø30mm (1 3/16")	60mm (2 3/8"), 100mm (4")	w32mm (1 1/4") x H70mm (2 3/4")	w32mm (1 1/4") x H38mm (1 1/2")
		Round ø50mm (2")	60mm (2 3/8"), 100mm (4")	w32mm (1 1/4") x H70mm (2 3/4")	w32mm (1 1/4") x H38mm (1 1/2")

Side Heavy Duty	Mid Heavy Duty	Diameter	Projection from wall to pole centre	Side Fixing plate size	Mid Fixing plate size
		Square H27mm (1 1/16")	100mm (4"), 140mm (5 1/2")	w47mm (1 7/8") x H76mm (3")	w47mm (1 7/8") x H36mm (1 7/16")
		Flat H36mm (1 7/16")	100mm (4"), 140mm (5 1/2")	w47mm (1 7/8") x H76mm (3")	w47mm (1 7/8") x H36mm (1 7/16")
		Round ø30mm (1 3/16")	100mm (4"), 140mm (5 1/2")	w47mm (1 7/8") x H76mm (3")	w47mm (1 7/8") x H36mm (1 7/16")
		Round ø50mm (2")	100mm (4"), 140mm (5 1/2")	w47mm (1 7/8") x H76mm (3")	w47mm (1 7/8") x H36mm (1 7/16")



Flush Light Duty	Diameter	Drop from ceiling to top of pole	Fixing plate size
	Square H27mm (1 1/16")	3mm (1/8")	w20mm (1 3/16") x L50mm (2")
	Flat H36mm (1 7/16")	3mm (1/8")	w20mm (1 3/16") x L50mm (2")
	Round ø30mm (1 3/16")	3mm (1/8")	w20mm (1 3/16") x L50mm (2")

Flush Heavy Duty	Diameter	Drop from ceiling to top of pole	Fixing plate size
	Square H27mm (1 1/16")	3mm (1/8")	w40mm (1 9/16") x L59mm (2 9/16")
	Flat H36mm (1 7/16")	3mm (1/8")	w40mm (1 9/16") x L59mm (2 9/16")
	Round ø30mm (1 3/16")	3mm (1/8")	w40mm (1 9/16") x L59mm (2 9/16")
	Round ø50mm (2")	3mm (1/8")	w40mm (1 9/16") x L59mm (2 9/16")



RECESS BRACKETS

Recess with hook stop	Diameter	Depth off wall	Fixing plate size
	Square H27mm (1 1/16")	14mm (9/16")	w42mm (1 11/16") x H27mm (1 1/16")
	Flat H36mm (1 7/16")	14mm (9/16")	w31mm (1 1/4") x H36mm (1 7/16")
	Round ø30mm (1 3/16")	14mm (9/16")	w40mm (1 9/16") x H31mm (1 1/4")
	Round ø50mm (2")	14mm (9/16")	w64mm (1 1/2") x H51mm (2")

ADJUSTABLE BRACKETS

Side	Mid	Diameter	Projection from wall to pole centre	Side Fixing plate size	Mid Fixing plate size
		Square H27mm (1 1/16")	Min.80mm (3 1/8") Max.130mm (5 1/8")	w47mm (1 7/8") x H76mm (3")	w47mm (1 7/8") x H36mm (1 7/16")
		Flat H36mm (1 7/16")	Min.80mm (3 1/8") Max.130mm (5 1/8")	w47mm (1 7/8") x H76mm (3")	w47mm (1 7/8") x H36mm (1 7/16")
		Round ø30mm (1 3/16")	Min.80mm (3 1/8") Max.130mm (5 1/8")	w47mm (1 7/8") x H76mm (3")	w47mm (1 7/8") x H36mm (1 7/16")
		Round ø50mm (2")	Min.80mm (3 1/8") Max.130mm (5 1/8")	w47mm (1 7/8") x H76mm (3")	w47mm (1 7/8") x H36mm (1 7/16")

DOUBLE BRACKETS





Side	Mid	Diameter	Projection from wall to pole centre	Side Fixing plate size	Mid Fixing plate size
		Square H27mm (1 1/16")	F140mm (5 1/2") B adjustable	w47mm (1 7/8") x H76mm (3")	w47mm (1 7/8") x H36mm (1 7/16")
		Flat H36mm (1 7/16")	F140mm (5 1/2") B adjustable	w47mm (1 7/8") x H76mm (3")	w47mm (1 7/8") x H36mm (1 7/16")
		Round ø30mm (1 3/16")	F140mm (5 1/2") B adjustable	w47mm (1 7/8") x H76mm (3")	w47mm (1 7/8") x H36mm (1 7/16")
		Round ø50mm (2")	F140mm (5 1/2") B adjustable	w47mm (1 7/8") x H76mm (3")	w47mm (1 7/8") x H36mm (1 7/16")

CUSTOM BRACKETS

A bespoke design service is offered to ensure solutions in even the most challenging installations.

				
Custom Projection	Custom Fixing Plate	Uplift	Ceiling Brackets	Angled Brackets
Specify the exact projection needed.	Relevant where space is restricted or weight is a concern.	Helps negotiate cornice and similar architectural features.	Specify exact projection required from ceiling.	The solution for tight and awkward locations.

GLIDING OPTIONS

2C Gliders	Rollers®	Wave® 2C gliders	Wave® rollers®
			
Drop from bottom of track: 8mm (5/16")	Drop from bottom of track: 8mm (5/16")	Drop from bottom of track: 8mm (5/16") Wave® Pitch: 60mm (2 3/8") • 80mm (3 1/8")	Drop from bottom of track: 27mm (1 1/16") Wave® Pitch: 80mm (3 1/8")

POLES

Poles are cut, bent and curved to suit individual requirements.
When calculating the length of your pole, remember to allow tolerance beyond the width of the frame for the curtains to stack back to the edge of the window.

Maximum pole length in one piece 4.0m (157").Ⓢ

Poles exceeding the maximum length will be cut into equal parts unless otherwise specified.
A pole joiner will be supplied.

Twin cord systems are always supplied in an even number of parts & will be supplied in a minimum of two sections.


Size	Control Type	Maximum distance between brackets	Minimum bend radius
Square H27mm (1 1/16")	Hand Drawn	1000mm (39")	R300mm (12")
	Corded	1000mm (39")	n/a
Flat H36mm (1 7/16")	Hand Drawn	1000mm (39")	R200mm (8")
Round Ø30mm (1 3/16")	Hand Drawn	1000mm (39")	R300mm (12")
	Corded	1000mm (39")	R300mm (12")
Round Ø50mm (2")	Hand Drawn	1000mm (39")	R600mm (24")
	Corded	1000mm (39")	R670mm (26")

ACCESSORIES

Draw Rods

Fine

Standard

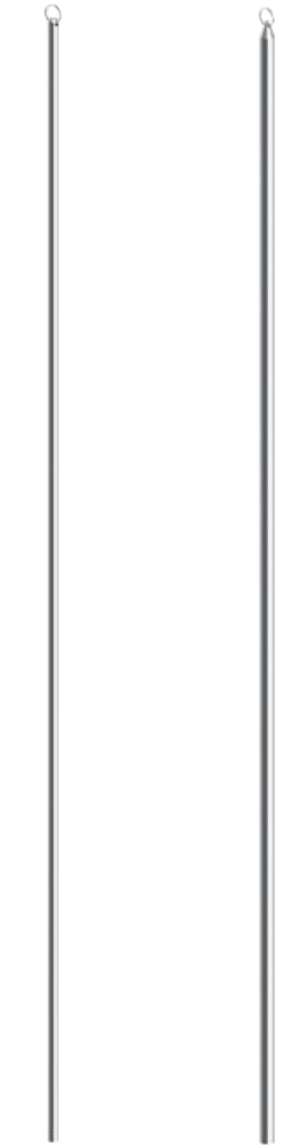

Draw rod length:
1000mm (39 3/8")
Custom lengths available to order

Cord Retainer



All corded tracks are supplied as standard with a metal cord retainer. This ensures that all cords are safely secured to the wall and complies with BS EN 13120:2009+A12014.

This will be supplied in the same finish as the system, unless advised otherwise.



Fixing plate size:
Ø46mm (1 13/16")

Ⓢ Supplied in sections - Section lengths over 3.0m (118") will incur a handling charge Ⓢ Supplied as standard on systems over 3.0m (10ft) with single stack curtains
For full technical information, sizes and weights please download the specification guide - www.bradleycollection.com/specification-guides/



STEEL

The Steel Collection remains a byword in elegance. Historical design cues, high quality materials and traditional artisan skills are all on display in this timeless classic.

Pictured: ø25mm (1") Pole • Flared Disc • Brass Toned
Interior design: Georgia Victoria - Edinburgh - UK

STEEL

CRAFTED IN SUFFOLK

A picture of elegance, the Steel Collection blends innovative design with quality craftsmanship,



PURE FORM

The original Steel collection is available in four pole diameters Ø19mm (¾") • 25mm (1") • 38mm (1½") • 50mm (2"). Each component has been carefully scaled to maintain the aesthetic of the Collection.



FUNCTION

Brackets are designed for easy installation, with an optional magnetic cover plate.
Brackets can be supplied to custom lengths and designs.



BENT TO SHAPE

A bespoke bay bending and curving service is available on all diameters to allow the perfect shaped pole to fit any bay window.



LENGTH

Poles can be cut to any length.Ⓒ On longer systems, the use of passing brackets & rings will allow uninterrupted travel of the drapes along the full length of the system.



FRENCH POLES

The French pole from the Steel Collection is an iconic design favourite. A simple and sophisticated way to adorn windows.




FINISHES

Signature translucent finishes of the Steel Collection allow the beauty of steel to shine through.



Polished




Natural Steel




Brass Toned ☉☉☉



Matte Brass Toned ☉☉☉




Bronzed ☉



Oil Rubbed



Waxed



Flint ☉

Pictured left to right: ø25mm (1") Pole • Hammered Ball & Collar
Polished Steel • Natural Steel • Brass Toned • Matte Brass toned
Bronzed - Satin • Waxed • Oil Rubbed • Flint - Satin

Antique Brass has been added to Steel Collection for the 21|23 season



Antique Brass ☉

FINIALS

Simplicity is the watchword for this grouping of stud, disc and ball designs.



Standard Stud

ø19mm (3/4") Inclusive Length 6mm (1/4")
ø25mm (1") Inclusive Length 8mm (5/16")
ø38mm (1 1/2") Inclusive Length 10mm (3/8")
ø50mm (2") Inclusive Length 12mm (1/2")



Large Stud

ø19mm (3/4") Inclusive Length 6mm (1/4")
ø25mm (1") Inclusive Length 8mm (5/16")
ø38mm (1 1/2") Inclusive Length 10mm (3/8")
ø50mm (2") Inclusive Length 12mm (1/2")



Button Stud

ø19mm (3/4") Inclusive Length 26mm (1")
ø25mm (1") Inclusive Length 40mm (1 5/16")
ø38mm (1 1/2") Inclusive Length 59mm (2 3/16")
ø50mm (2") Inclusive Length 69mm (2 11/16")



Flared Stud

ø19mm (3/4") Inclusive Length 12mm (1/2")
ø25mm (1") Inclusive Length 14mm (9/16")
ø38mm (1 1/2") Inclusive Length 26mm (1")



Medium Stud

ø19mm (3/4") Inclusive Length 6mm (1/4")
ø25mm (1") Inclusive Length 8mm (5/16")
ø38mm (1 1/2") Inclusive Length 10mm (3/8")
ø50mm (2") Inclusive Length 12mm (1/2")



Hammered Stud

ø19mm (3/4") Inclusive Length 10mm (3/8")
ø25mm (1") Inclusive Length 12mm (1/2")
ø38mm (1 1/2") Inclusive Length 16mm (5/8")
ø50mm (2") Inclusive Length 20mm (13/16")



Pebble

ø19mm (3/4") Inclusive Length 27mm (1 1/16")
ø25mm (1") Inclusive Length 31mm (1 1/4")
ø38mm (1 1/2") Inclusive Length 48mm (1 7/8")



Flared Disc

ø19mm (3/4") Inclusive Length 17mm (1 1/16")
ø25mm (1") Inclusive Length 21mm (7/8")
ø38mm (1 1/2") Inclusive Length 34mm (1 5/16")



Forged Disc

ø19mm (3/4") Inclusive Length 2mm (1/16")
ø25mm (1") Inclusive Length 3mm (3/16")
ø38mm (1 1/2") Inclusive Length 3mm (3/16")
ø50mm (2") Inclusive Length 4mm (3/16")



Ball & Collar

ø19mm (3/4") Inclusive Length 55mm (2 3/16")
ø25mm (1") Inclusive Length 65mm (2 5/16")
ø38mm (1 1/2") Inclusive Length 75mm (2 15/16")
ø50mm (2") Inclusive Length 103mm (4 1/16")



Hammered Ball & Collar

ø19mm (3/4") Inclusive Length 55mm (2 3/16")
ø25mm (1") Inclusive Length 65mm (2 5/16")



Ribbed Ball & Collar

ø19mm (3/4") Inclusive Length 53mm (2 1/16")
ø25mm (1") Inclusive Length 60mm (2 3/8")



Hammered Disc

ø19mm (3/4") Inclusive Length 2mm (1/16")
ø25mm (1") Inclusive Length 3mm (3/16")
ø38mm (1 1/2") Inclusive Length 3mm (3/16")
ø50mm (2") Inclusive Length 4mm (3/16")



Crystal Ball & Collar

ø19mm (3/4") Inclusive Length 65mm (2 5/16")
ø25mm (1") Inclusive Length 75mm (2 15/16")
ø38mm (1 1/2") Inclusive Length 103mm (4 1/16")



Ball & Claw

ø19mm (3/4") Inclusive Length 75mm (3")
ø25mm (1") Inclusive Length 90mm (3 5/16")
ø38mm (1 1/2") Inclusive Length 120mm (4 3/4")



Twisted Knot

ø19mm (3/4") Inclusive Length 90mm (3 5/16")
ø25mm (1") Inclusive Length 95mm (3 7/8")
ø38mm (1 1/2") Inclusive Length 150mm (5 7/8")

FINIALS

The true craft of the artisan is on display with these designs.

Pictured left to right: ø25mm (1") • Jacobs Horn • Waxed Curling Leaf • Bronzed - Satin • Loop • Antique Brass - Satin Buffon Stud • Matte Brass Toned • Pebble • Natural Steel

STEEL



Hammered Spear 🖐

ø19mm (3/4") Inclusive Length 122mm (4 13/16")
ø25mm (1") Inclusive Length 150mm (5 7/8")



Double Ball Basket 🖐

ø19mm (3/4") Inclusive Length 142mm (5 5/16")
ø25mm (1") Inclusive Length 146mm (5 3/4")
ø38mm (1 1/2") Inclusive Length 205mm (8 1/16")



Loop 🖐

ø19mm (3/4") Inclusive Length 115mm (4 1/2")
ø25mm (1") Inclusive Length 135mm (5 3/16")
ø38mm (1 1/2") Inclusive Length 180mm (7 1/16")



Curling Leaf 🖐👉

ø19mm (3/4") Inclusive Length 110mm (4 3/16")
ø25mm (1") Inclusive Length 140mm (5 1/2")
ø38mm (1 1/2") Inclusive Length 200mm (8")



Tusk 🖐👉

ø19mm (3/4") Inclusive Length 118mm (4 5/8")
ø25mm (1") Inclusive Length 141mm (5 5/16")



Jacob's Horn 🖐👉

ø19mm (3/4") Inclusive Length 105mm (4 1/8")
ø25mm (1") Inclusive Length 130mm (5 1/8")
ø38mm (1 1/2") Inclusive Length 180mm (7 1/16")



Square Ram's Horn 🖐


ø19mm (3/4") Inclusive Length 120mm (4 3/4")
ø25mm (1") Inclusive Length 135mm (5 3/16")





Reverse Square Ram's Horn 🖐👉


ø19mm (3/4") Inclusive Length 55mm (2 3/16")
ø25mm (1") Inclusive Length 55mm (2 3/16")

SINGLE BRACKETS


Side		Diameter	Projection from wall to pole centre	Fixing plate size	Covered Fixing plate size
		ø19mm (3⁄4")	60mm (2³⁄₈"), 100mm (4")	w20mm (1³⁄₁₆") x H84mm (3⁵⁄₁₆")	w55mm (2³⁄₁₆") x H20mm (1³⁄₁₆")
		ø25mm (1")	60mm (2³⁄₈"), 100mm (4")	w25mm (1") x H102mm (4")	w60mm (2³⁄₈") x H25mm (1")
		ø38mm (1 ½")	100mm (4")	w30mm (1³⁄₁₆") x H117mm (4⁵⁄₈")	w80mm (3¹⁄₈") x H30mm (1³⁄₁₆")
		ø50mm (2")	100mm (4")	w30mm (1³⁄₁₆") x H117mm (4⁵⁄₈")	w80mm (3¹⁄₈") x H30mm (1³⁄₁₆")
Mid	Passing	Diameter	Projection from wall to pole centre	Fixing plate size	Covered fixing plate size
 		ø19mm (3⁄4")	60mm (2³⁄₈"), 100mm (4")	w55mm (2³⁄₁₆") x H20mm (1³⁄₁₆")	w59mm (2⁵⁄₁₆") x H24mm (1⁵⁄₁₆")
		ø25mm (1")	60mm (2³⁄₈"), 100mm (4"), 140mm (5½")Ⓢ	w60mm (2³⁄₈") x H25mm (1")	w64mm (2½") x H29mm (1½")
		ø38mm (1 ½")	100mm (4")	w80mm (3¹⁄₈") x H30mm (1³⁄₁₆")	w84mm (3⁵⁄₁₆") x H34mm (1⁵⁄₁₆")
		ø50mm (2")	100mm (4")	w80mm (3¹⁄₈") x H30mm (1³⁄₁₆")	w84mm (3⁵⁄₁₆") x H34mm (1⁵⁄₁₆")

Ceiling	Passing	Diameter	Drop from ceiling to pole centre	Fixing plate size
 		ø19mm (3⁄4")	60mm (2³⁄₈"), 100mm (4")	w55mm (2³⁄₁₆") x H20mm (1³⁄₁₆")
		ø25mm (1")	60mm (2³⁄₈"), 100mm (4")	w60mm (2³⁄₈") x H25mm (1")
		ø38mm (1 ½")	100mm (4")	w80mm (3¹⁄₈") x H30mm (1³⁄₁₆")




RECESS BRACKETS

Recess with ring stop	Diameter	Depth off wall	Fixing plate size
	ø19mm (3⁄4")	4mm (3⁄₁₆")	ø42mm (1⁵⁄₈")
	ø25mm (1")	4mm (3⁄₁₆")	ø50mm (2")
	ø38mm (1 ½")	4mm (3⁄₁₆")	ø72mm (2³⁄₁₆")
	ø50mm (2")	4mm (3⁄₁₆")	ø72mm (2³⁄₁₆")




FRENCH BRACKETS

French - End	Diameter	Projection from wall to pole centre	Fixing plate size
	ø25mm (1")	100mm (4"), 140mm (5½")Ⓢ	w30mm (1³⁄₁₆") x H80mm (3¹⁄₈")

ADJUSTABLE BRACKETS


Side		Diameter	Projection from wall to pole centre	Fixing plate size
		ø19mm (3⁄4")	Min.65mm (2⁹⁄₁₆") Max.150mm (5⁷⁄₈")	w20mm (1³⁄₁₆") x H84mm (3⁵⁄₁₆")
		ø25mm (1")	Min.75mm (2¹⁵⁄₁₆") Max.175mm (6⁷⁄₈")	w25mm (1") x H102mm (4")
		ø38mm (1 ½")	Min.95mm (3³⁄₄") Max.200mm (7⁷⁄₈")	w30mm (1³⁄₁₆") x H117mm (4⁵⁄₈")
Mid	Passing	Diameter	Projection from wall to pole centre	Fixing plate size
 		ø19mm (3⁄4")	Min.65mm (2⁹⁄₁₆") Max.150mm (5⁷⁄₈")	w55mm (2³⁄₁₆") x H20mm (1³⁄₁₆")
		ø25mm (1")	Min.75mm (2¹⁵⁄₁₆") Max.175mm (6⁷⁄₈")	w60mm (2³⁄₈") x H25mm (1")
		ø38mm (1 ½")	Min.95mm (3³⁄₄") Max.200mm (7⁷⁄₈")	w80mm (3¹⁄₈") x H30mm (1³⁄₁₆")

DOUBLE BRACKETS

Side		Diameter	Projection from wall to pole centre	Fixing plate size	
		Fø25mm (1")	F160mm (6 ⁵ / ₁₆ ")	w25mm (1")	
		Bø19mm (3/4")	B60mm (2 ³ / ₈ ")	x H102mm (4")	
		Fø38mm (1 1/2")	F160mm (6 ⁵ / ₁₆ ")	w30mm (1 ³ / ₁₆ ")	
		Bø25mm (1")	B60mm (2 ³ / ₈ ")	x H117mm (4 ⁵ / ₈ ")	
Mid	Passing	Diameter	Projection from wall to pole centre	Mid fixing plate size	Passing fixing plate size
		Fø25mm (1")	F160mm (6 ⁵ / ₁₆ ")	w60mm (2 ³ / ₈ ")	w112mm (4 ⁷ / ₁₆ ")
		Bø19mm (3/4")	B60mm (2 ³ / ₈ ")	x H25mm (1")	x H50mm (2")
		Fø38mm (1 1/2")	F160mm (6 ⁵ / ₁₆ ")	w80mm (3 ¹ / ₈ ")	w122mm (4 ¹³ / ₁₆ ")
		Bø25mm (1")	B60mm (2 ³ / ₈ ")	x H30mm (1 ³ / ₁₆ ")	x H60mm (2 ³ / ₈ ")



CUSTOM BRACKETS

Steel can be customised to suit virtually any window.

				
Custom Projection	Custom Fixing Plate	Uplift	Arm	Angled Brackets
Specify the exact projection needed.	Relevant where space is restricted or weight is a concern.	Helps negotiate cornice and similar architectural features.	For really tricky installations, arms without backplates can be designed for direct fixing.	The solution for tight and awkward locations.

Ⓢ 140mm (5½") Mid & Passing brackets only available on French poles.
For full technical information, sizes and weights please download the specification guide - www.bradleycollection.com/specification-guides/

CLASSIC RINGS

Ring	Passing Ring	Diameter	Ring drop from top of pole to bottom of ringlet	Passing ring drop from top of pole to bottom of ringlet
		ø19mm (3/4") ø25mm (1") ø38mm (1 1/2") ø50mm (2")	44mm (1 3/4") 49mm (1 15/16") 63mm (2 1/2") 82mm (3 1/4")	49mm (1 15/16") 54mm (2 1/8") 71mm (2 3/16") 89mm (3 1/2")



POLES

Poles are cut, bent and curved to suit individual requirements.
When calculating the length of your pole, remember to allow tolerance beyond the width of the frame for the curtains to draw back to the edge of the window.

Maximum pole length in one piece 4.0m (157").
Poles exceeding the recommended maximum distance between brackets, will be cut into equal parts unless otherwise specified.
Pole joiners will be supplied.



Diameter	Recommended maximum distance between brackets	Recommended curtain type for pole diameter	Minimum bend radius	French Pole bend radius
ø19mm (3/4") ø25mm (1") ø38mm (1 1/2") ø50mm (2")	1800mm (71") 2000mm (79") 2200mm (87") 2400mm (96")	Light to medium weight, lined & non interlined curtains Medium weight, lined & interlined curtains Medium to heavy weight, lined & interlined curtains Heavy weight interlined curtains	ø75mm (3") ø100mm (4") ø255mm (10") ø255mm (10")	n/a ø75mm (3") n/a n/a

ACCESSORIES

Ombres	Draw Rods®
Large Stud  Internal projection from wall: 125mm (4 15/16") Fixing plate size: ø60mm (2 3/8")	Ball & Collar  Internal projection from wall: 125mm (4 15/16") Fixing plate size: ø60mm (2 3/8")

Hold back	Draw Rods®
Standard Stud  Internal measurement: 134mm (5 1/4") Fixing plate size: w20mm (1 3/16") x h56mm (2 3/16")	Ball & Collar 

Tie Back Hook	Drapery Arm
 Internal measurement: 27mm (1 1/16") Fixing plate size: w20mm (1 3/16") x h78mm (3 1/16")	 Diameter: ø25mm (1") Fixing plate size: w30mm (1 3/16") x h185mm (7 1/4")

Standard Stud	Ball & Collar
	
Draw rod length: 1000mm (39 3/8") Custom lengths available to order	



MIO

The sharp, modern form of the Mio Collection flows from its purposeful design intent and the use of laser technology in its production.

The precision styling can be accentuated by the industrial, brushed stainless finish or can be softened with contemporary coated finishes.

Pictured: ø50mm (2") Pole • Stud • Brushed Stainless

Interior design: Bayon Design Studio Inc - California - USA


CLEAN LINES

The distinct aesthetic is achieved by utilising the latest technology, from CNC lathes & mills to laser cutting. This ensures a crisp edge and an accurate fit.



LENGTH

Poles can be cut to any length.☺ On longer systems, the use of passing brackets & rings will allow uninterrupted travel of the drapes along the full length of the system.

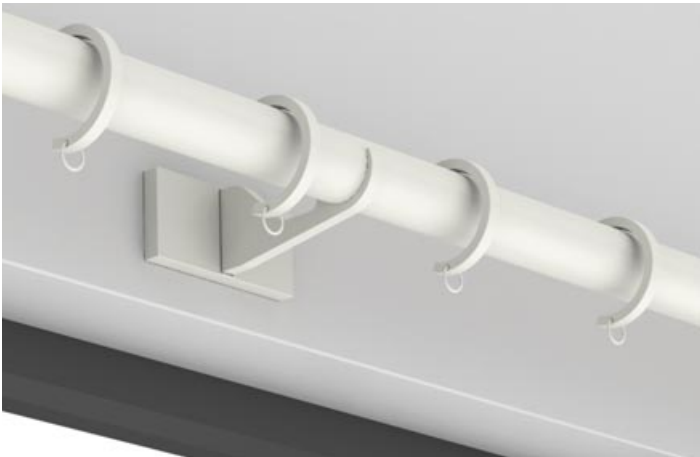


ACRYLIC☼

For the ultimate luxury statement, the tones & finishes of Mio can be paired with a solid acrylic pole.



SCALE

Mio offers the widest choice of finish & scale for your interior. From soft matte hues & rich metal finishes to engineered, Brushed Stainless and all available in five pole diameters. Ø19mm (3/4") • 25mm (1") • 30mm (1 3/16") • 38mm (1 1/2") • 50mm (2").

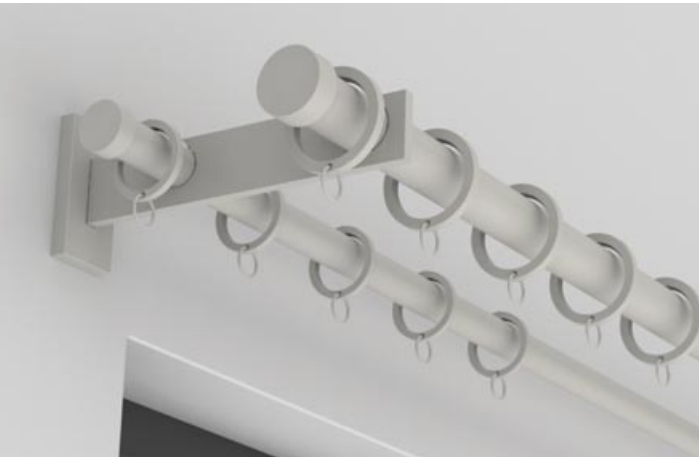

FUNCTION

A range of bracket options have been designed to allow easy Installation. Brackets have magnetic cover plates to hide fixings. Brackets can also be supplied to custom lengths and designs.




BENT TO SHAPE

A bespoke bay bending and curving service is available on all diameters, to allow the perfect shaped pole for any window.



FRENCH POLES

The traditional French pole re-styled for modern living, with understated bracket design and lined rings.

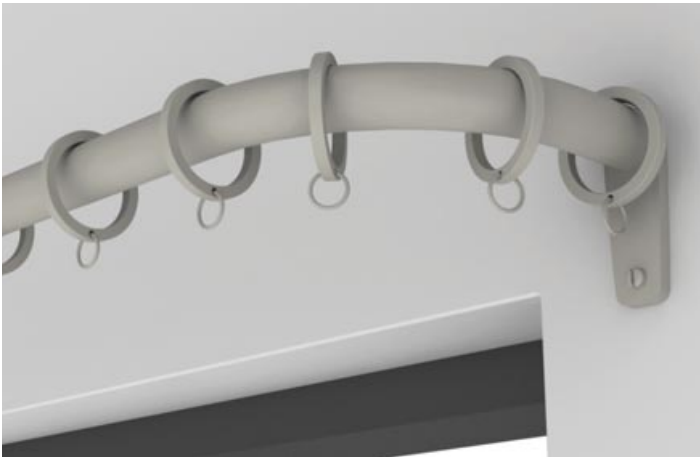

☺ Supplied in sections - Maximum section per length 4.0m (157") - Section lengths over 2.4m (94") will incur a handling charge
☼ Acrylic poles should not be positioned in direct sunlight, and are not suitable for use in conservatories or outdoors

FINISHES

Mio has an unparalleled selection of subtle colour coats, which can be specified in matte, satin or gloss finishes.

For more glamorous projects, metallic coats are featured in both satin and gloss.


Pictured left to right:
ø25mm (1") - Flush Stud - Cloud - Matte • Stud - Dove - Satin
Disc • Millstone - Gloss • Octagon Stud - Champagne - Satin
Pebble • Antique Brass - Gloss

Coat Options



Cloud M S G	Barley M S G	Bone M S G	Cream M S G	Parchment M S G
Mineral M S G	Dove M S G	Millstone M S G	Clay M S G	Cocoa M S G
Alabaster M S G	Dusk M S G	Ceramic M S G	Slate M S G	Flint M S G
Damson M S G	Moss M S G	Smoke M S G	Frame Grey M S G	Raven M S G
Platinum S G	Champagne S G	Gold S G	Cognac S G	Gunmetal S G
Pewter S G	Antique Brass S G	Bronzed S G	Natural Silver	

Due to printing limitations colours in this brochure may not be accurate
Samples are available on request - www.bradleycollection.com/samples/

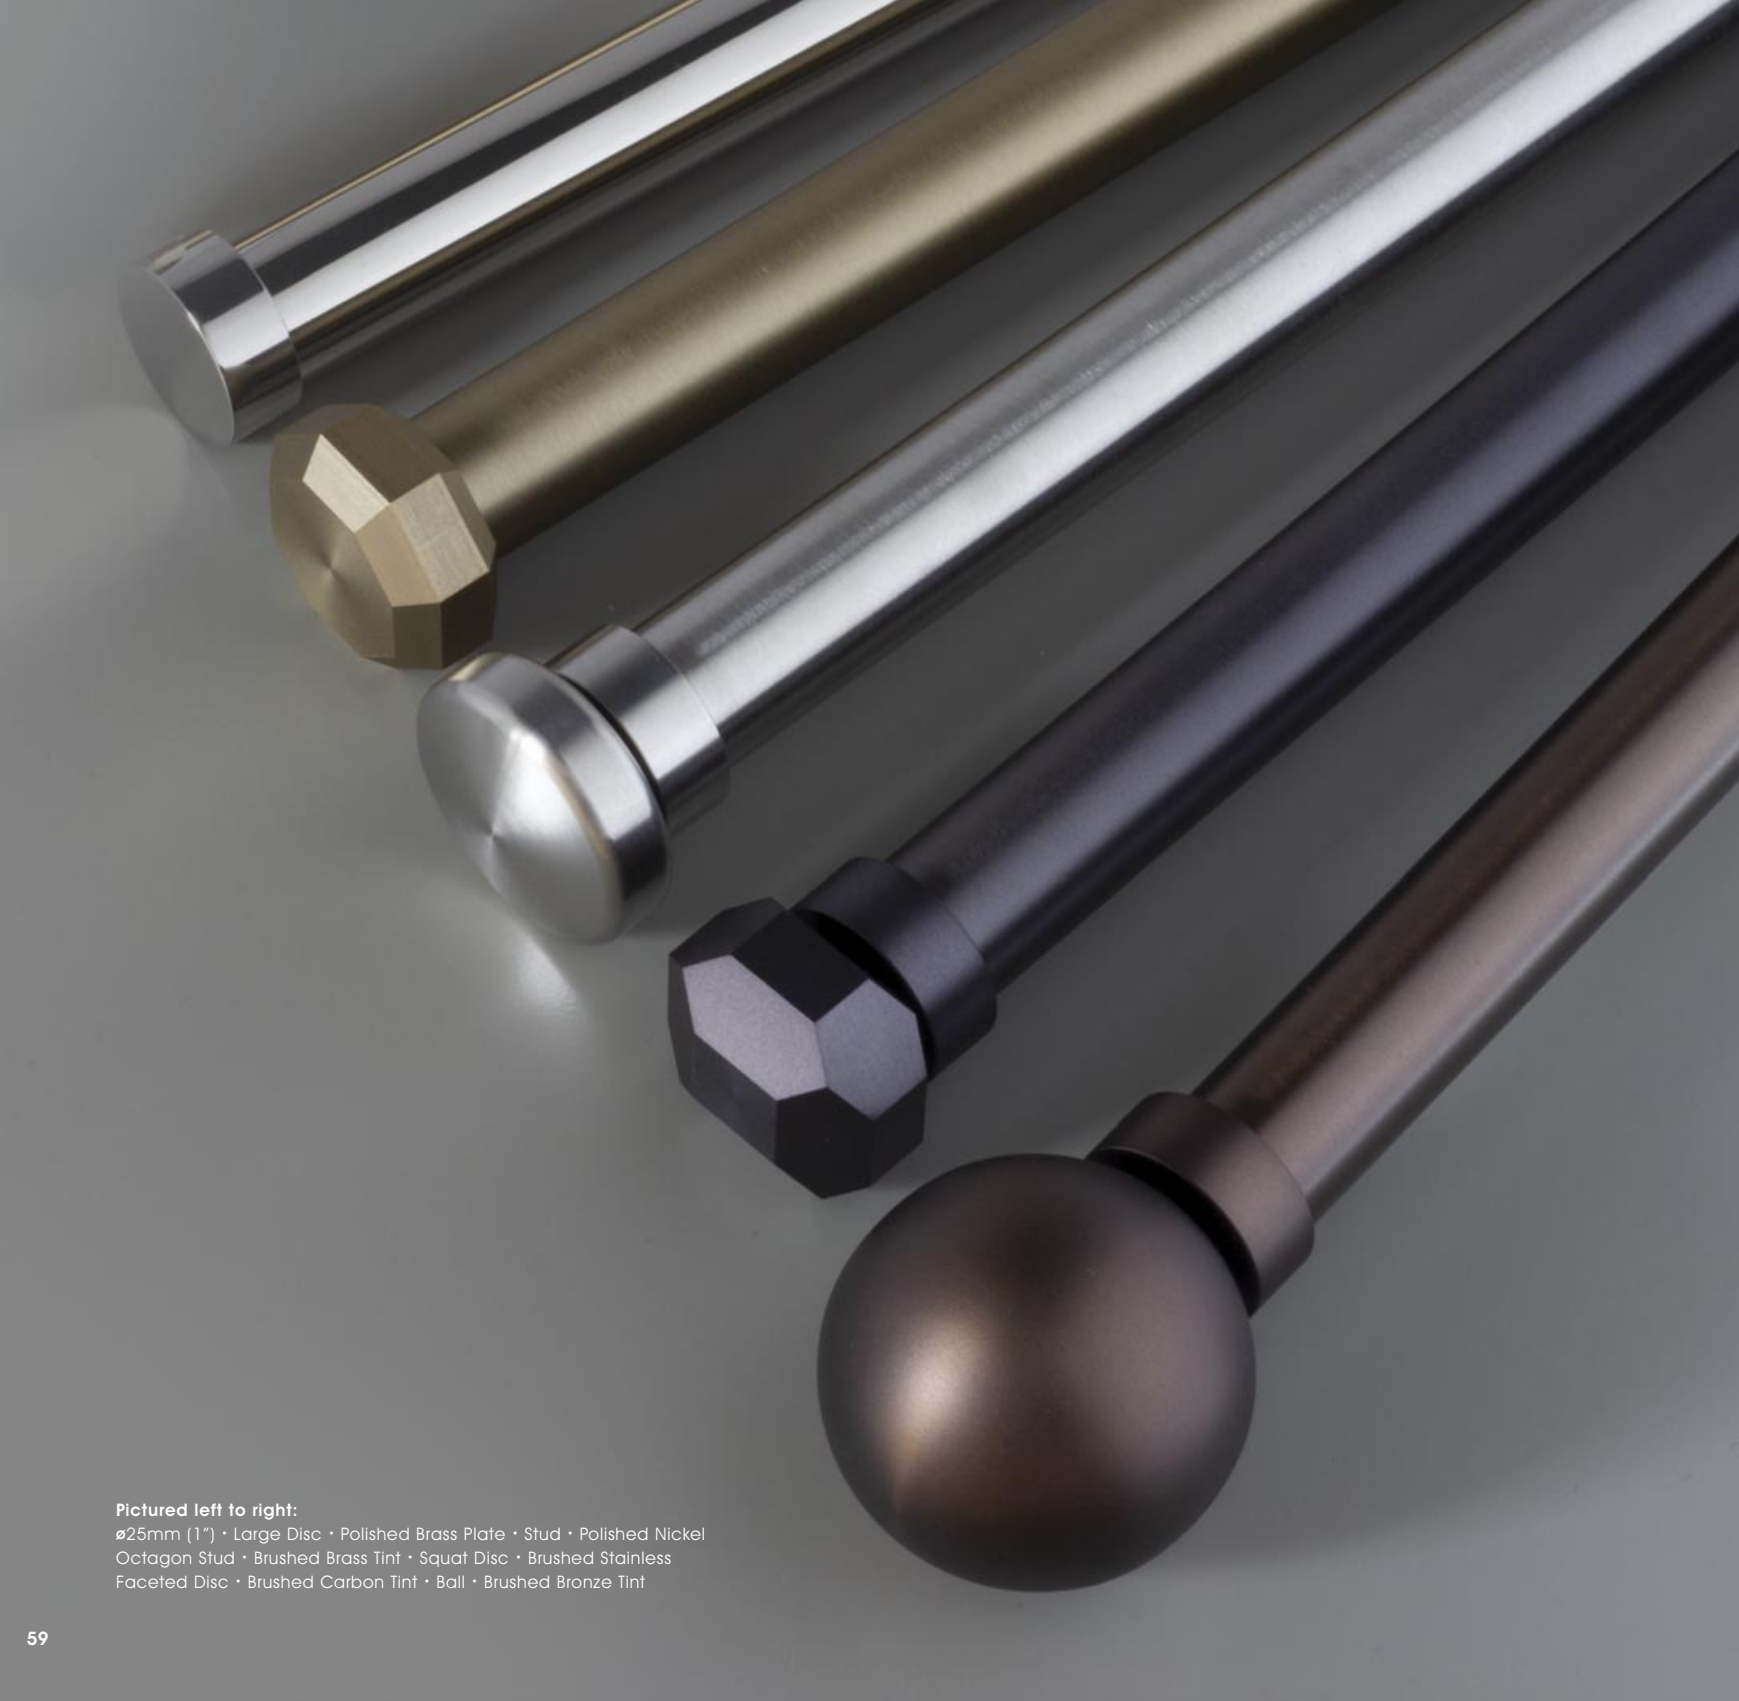


Pictured left to right:
 ø25mm (1") • Large Disc • Polished Brass Plate • Stud • Polished Nickel
 Octagon Stud • Brushed Brass Tint • Squat Disc • Brushed Stainless
 Faceted Disc • Brushed Carbon Tint • Ball • Brushed Bronze Tint

FINISHES

Mio also offers a selection of more specialised options, including brushed finishes on authentic stainless steel.

STAINLESS

Brushed stainless steel, self-coloured or in subtle tinted hues gives an industrial aesthetic.

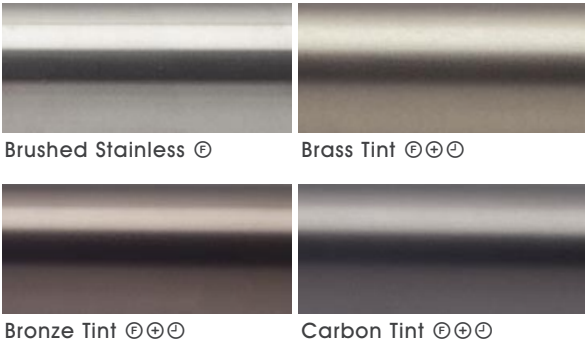


ARCHITECTURAL METALLICS



PLATED

Polished plated finishes provide a traditional sense of luxury.



Due to printing limitations colours in this brochure may not be accurate
 Samples are available on request - www.bradleycollection.com/samples/

⊕ A finishing charge will apply ⊖ Longer lead-times will apply ⊗ Not available with French poles options

FINISHES

MIO

Pictured: ø38mm (1 1/2") Pole • Squat Disc • Old Pewter
ø50mm (2") Acrylic Pole • Stud • Polished Nickel
ø50mm (2") Acrylic Pole • Faceted Disc • Brushed Brass Tint

FLUID METAL™

Exciting new finishing technology for Mio enables a richness and rarity of finish not previously possible on a steel-based product.



Old Silver ⊕⊖⊕⊖✎ Old Pewter ⊕⊖⊕⊖✎ Old Brass ⊕⊖⊕⊖✎ Light Bronze ⊕⊖⊕⊖✎ Bronze Art ⊕⊖⊕⊖✎

⊕ A finishing charge will apply ⊖ Longer lead-times will apply
⊕ Fluid Metal finishes are supplied unlacquered and will tarnish over time, a clear lacquer may be applied on request as a custom finish ✎ Fluid Metal finishes are hand produced, finish may vary.
Due to printing limitations colours in this brochure may not be accurate. Samples are available on request - www.bradleycollection.com/samples/

ACRYLIC POLES

Transparent acrylic poles may be teamed with components in any of the Mio finishes.



Clear Acrylic Pole ☼

☼ Acrylic poles should not be positioned in direct sunlight, and are not suitable for use in conservatories or outdoors

FINIALS

Mio – Simplicity of design and purity of form.



Pictured left to right:
ø38mm (1 1/2") • Pebble • Moss - Matte
ø19mm (3/4") • Flush Stud • Frame Grey - Matte
ø50mm (2") • Crystal Ball • Damson - Matte
ø25mm (1") • Ball • Smoke - Matte
ø30mm (1 3/16") • Large Disc • Raven - Matte

Flush Stud

- ø19mm (3/4") Inclusive Length 6mm (1/4")
- ø25mm (1") Inclusive Length 6mm (1/4")
- ø30mm (1 3/16") Inclusive Length 6mm (1/4")
- ø38mm (1 1/2") Inclusive Length 8mm (5/16")
- ø50mm (2") Inclusive Length 8mm (5/16")

Stud

- ø19mm (3/4") Inclusive Length 2mm (1/16")
- ø25mm (1") Inclusive Length 3mm (1/8")
- ø30mm (1 3/16") Inclusive Length 3mm (1/8")
- ø38mm (1 1/2") Inclusive Length 3mm (1/8")
- ø50mm (2") Inclusive Length 4mm (3/16")

Disc

- ø19mm (3/4") Inclusive Length 2mm (1/16")
- ø25mm (1") Inclusive Length 3mm (1/8")
- ø30mm (1 3/16") Inclusive Length 3mm (1/8")
- ø38mm (1 1/2") Inclusive Length 3mm (1/8")
- ø50mm (2") Inclusive Length 4mm (3/16")

Large Disc

- ø19mm (3/4") Inclusive Length 4mm (3/16")
- ø25mm (1") Inclusive Length 4mm (3/16")
- ø30mm (1 3/16") Inclusive Length 4mm (3/16")
- ø38mm (1 1/2") Inclusive Length 6mm (1/4")
- ø50mm (2") Inclusive Length 6mm (1/4")

For full technical information, sizes and weights please download the specification guide - www.bradleycollection.com/specification-guides/

Octagon Stud

- ø19mm (3/4") Inclusive Length 7mm (1/4")
- ø25mm (1") Inclusive Length 10mm (3/8")
- ø30mm (1 3/16") Inclusive Length 10mm (3/8")
- ø38mm (1 1/2") Inclusive Length 11mm (7/16")
- ø50mm (2") Inclusive Length 14mm (9/16")

Squat Disc

- ø19mm (3/4") Inclusive Length 17mm (11/16")
- ø25mm (1") Inclusive Length 23mm (7/8")
- ø30mm (1 3/16") Inclusive Length 23mm (7/8")
- ø38mm (1 1/2") Inclusive Length 33mm (1 5/16")
- ø50mm (2") Inclusive Length 44mm (1 3/4")

Ball

- ø19mm (3/4") Inclusive Length 50mm (2")
- ø25mm (1") Inclusive Length 63mm (2 1/2")
- ø30mm (1 3/16") Inclusive Length 62mm (2 7/16")
- ø38mm (1 1/2") Inclusive Length 83mm (3 1/4")
- ø50mm (2") Inclusive Length 104mm (4 1/16")

Cut Crystal Ball*

- ø19mm (3/4") Inclusive Length 55mm (3 3/16")
- ø25mm (1") Inclusive Length 66mm (2 5/8")
- ø30mm (1 3/16") Inclusive Length 66mm (2 5/8")
- ø38mm (1 1/2") Inclusive Length 85mm (3 3/8")
- ø50mm (2") Inclusive Length 108mm (4 1/4")

*: Crystal Finials should not be positioned in direct sunlight

Faceted Disc

- ø19mm (3/4") Inclusive Length 21mm (13/16")
- ø25mm (1") Inclusive Length 28mm (1 1/8")
- ø30mm (1 3/16") Inclusive Length 28mm (1 1/8")
- ø38mm (1 1/2") Inclusive Length 41mm (1 5/8")
- ø50mm (2") Inclusive Length 54mm (2 1/8")

Pebble

- ø19mm (3/4") Inclusive Length 25mm (1")
- ø25mm (1") Inclusive Length 34mm (1 5/16")
- ø30mm (1 3/16") Inclusive Length 39mm (1 9/16")
- ø38mm (1 1/2") Inclusive Length 50mm (1 15/16")
- ø50mm (2") Inclusive Length 66mm (2 9/16")



Crystal Ball*

- ø19mm (3/4") Inclusive Length 55mm (3 3/16")
- ø25mm (1") Inclusive Length 66mm (2 5/8")
- ø30mm (1 3/16") Inclusive Length 66mm (2 5/8")
- ø38mm (1 1/2") Inclusive Length 85mm (3 3/8")
- ø50mm (2") Inclusive Length 108mm (4 1/4")

Crystal Element*

- ø30mm (1 3/16") Inclusive Length 87mm (3 7/16")
- ø50mm (2") Inclusive Length 126mm (4 9/16")


SINGLE BRACKETS

Side		Diameter	Projection from wall to pole centre	Fixing plate size
		ø19mm (3/4") ø25mm (1") ø30mm (1 3/16") ø38mm (1 1/2") ø50mm (2")	60mm (2 3/8"), 100mm (4") 60mm (2 3/8"), 100mm (4") 100mm (4") 100mm (4") 100mm (4")	w34mm (1 5/16") x h70mm (2 3/4") w34mm (1 5/16") x h70mm (2 3/4") w34mm (1 5/16") x h70mm (2 3/4") w52mm (2 1/16") x h104mm (4 1/8") w52mm (2 1/16") x h104mm (4 1/8")
Mid	Passing	Diameter	Projection from wall to pole centre	Fixing plate size
		ø19mm (3/4") ø25mm (1") ø30mm (1 3/16") ø38mm (1 1/2") ø50mm (2")	60mm (2 3/8"), 100mm (4") 60mm (2 3/8"), 100mm (4"), 140mm (5 1/2")Ⓢ 100mm (4") 100mm (4") 100mm (4")	w70mm (2 3/4") x h34mm (1 5/16") w70mm (2 3/4") x h34mm (1 5/16") w70mm (2 3/4") x h34mm (1 5/16") w104mm (4 1/8") x h52mm (2 1/16") w104mm (4 1/8") x h52mm (2 1/16")
Ceiling	Passing	Diameter	Projection from wall to pole centre	Fixing plate size
		ø19mm (3/4") ø25mm (1") ø30mm (1 3/16") ø38mm (1 1/2") ø50mm (2")	60mm (2 3/8"), 100mm (4") 60mm (2 3/8"), 100mm (4") 100mm (4") 100mm (4") 100mm (4")	w70mm (2 3/4") x h34mm (1 5/16") w70mm (2 3/4") x h34mm (1 5/16") w70mm (2 3/4") x h34mm (1 5/16") w104mm (4 1/8") x h52mm (2 1/16") w104mm (4 1/8") x h52mm (2 1/16")



RECESS BRACKETS

Recess with ring stop	Diameter	Depth off wall	Fixing plate size
	ø19mm (3/4") ø25mm (1") ø30mm (1 3/16") ø38mm (1 1/2") ø50mm (2")	7mm (1/4") 8mm (5/16") 10mm (3/8") 12mm (1/2") 15mm (9/16")	ø26mm (1") ø34mm (1 3/16") ø40mm (1 7/16") ø49mm (1 15/16") ø64mm (2 1/2")




FRENCH BRACKETS

French - EndⓈ	Diameter	Projection from wall to pole centre	Fixing plate size
	ø25mm (1")	100mm (4"), 140mm (5 1/2")Ⓢ	w26mm (1") x h80mm (3 1/8")

ADJUSTABLE BRACKETS


Side	Passing	Diameter	Projection from wall to pole centre	Fixing plate size
		ø19mm (3/4") ø25mm (1") ø30mm (1 3/16") ø38mm (1 1/2") ø50mm (2")	Min.60mm (2 3/8") Max.170mm (6 11/16") Min.60mm (2 3/8") Max.170mm (6 11/16") Min.100mm (4") Max.170mm (6 11/16") Min.100mm (4") Max.170mm (6 11/16") Min.100mm (4") Max.170mm (6 11/16")	w34mm (1 5/16") x h70mm (2 3/4") w34mm (1 5/16") x h70mm (2 3/4") w34mm (1 5/16") x h70mm (2 3/4") w52mm (2 1/16") x h104mm (4 1/8") w52mm (2 1/16") x h104mm (4 1/8")

DOUBLE BRACKETS


Side		Diameter	Projection from wall to pole centre	Fixing plate size	
		Fø25mm (1")	F160mm (6 ⁵ / ₁₆ ")	w34mm (1 ⁵ / ₁₆ ") x	
		Bø19mm (3 ¹ / ₄ ")	B60mm (2 ³ / ₈ ")	h70mm (2 ³ / ₄ ")	
		Fø38mm (1 ¹ / ₂ ")	F160mm (6 ⁵ / ₁₆ ")	w52mm (2 ¹ / ₁₆ ") x	
		Bø25mm (1")	B60mm (2 ³ / ₈ ")	h104mm (4 ¹ / ₈ ")	
Mid	Passing	Diameter	Projection from wall to pole centre	Mid fixing plate size	Passing fixing plate size
		Fø25mm (1")	F160mm (6 ⁵ / ₁₆ ")	w70mm (2 ³ / ₄ ") x	w72mm (2 ¹³ / ₁₆ ") x
		Bø19mm (3 ¹ / ₄ ")	B60mm (2 ³ / ₈ ")	h34mm (1 ⁵ / ₁₆ ")	h59mm (2 ⁵ / ₁₆ ")
		Fø38mm (1 ¹ / ₂ ")	F160mm (6 ⁵ / ₁₆ ")	w104mm (4 ¹ / ₈ ") x	w52mm (2 ¹ / ₁₆ ") x
		Bø25mm (1")	B60mm (2 ³ / ₈ ")	h52mm (2 ¹ / ₁₆ ")	h104mm (4 ¹ / ₈ ")

CUSTOM BRACKETS


Mio can be customised to suit virtually any window.




Custom Projection
Specify the exact projection needed.



Custom Fixing Plate
Relevant where space is restricted or weight is a concern.



Uplift
Helps negotiate cornice and similar architectural features.



Angled Brackets
The solution for tight and awkward locations.



ELYSIAN

Elysian bridges the gap between two very different aesthetics, combining pared down modernist style with decorative sensibility.

Offered in an inspirational palette of solid and metallic finishes, Elysian is also now available in a wider selection of sizes.

Pictured: ø50mm (2") Pole • Templar • Clay - Gloss

ELYSIAN

SCALE

Now available in three pole diameters
Ø30mm (1 3/16") • 38mm (1 1/2") • 50mm (2").
Each component is carefully designed and
scaled to reflect the design intent.



FUNCTION

A range of bracket options have been designed to allow easy
installation. All wall & ceiling brackets have a magnetic cover
plate to hide screw fixings. Brackets can also be supplied to
custom lengths and designs.



LENGTH

Elysian can be cut to any length. Passing brackets & rings allow
drapes to travel the full system length.




DETAIL

Thoughtfully designed accessories improve functionality,
of the system without compromising the aesthetic.



SHAPE

Elysian offers a bespoke bay bending and curving service to fit
any bay window.

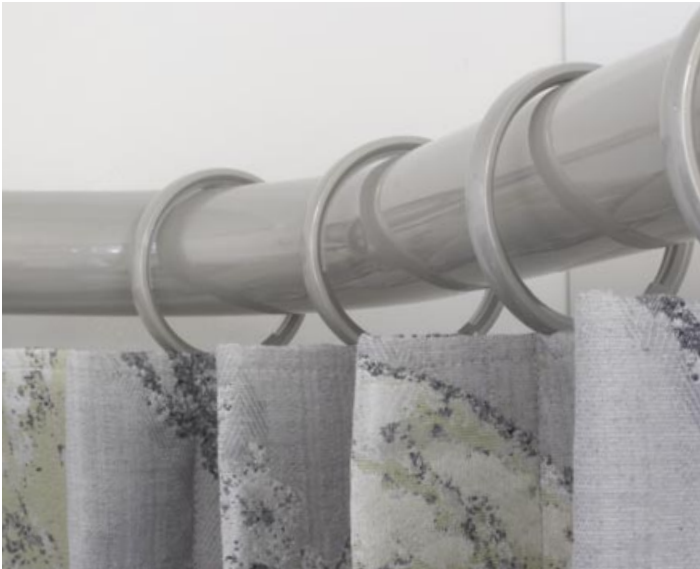

FINISHES

An unparalleled selection of coated and plated finishes, allows Elysian to express emotions ranging from the sober and understated to the glamorous and flamboyant.

Coat Options



Cloud M S G	Barley M S G	Bone M S G	Cream M S G	Parchment M S G
Mineral M S G	Dove M S G	Millstone M S G	Clay M S G	Cocoa M S G
Alabaster M S G	Dusk M S G	Ceramic M S G	Slate M S G	Flint M S G
Damson M S G	Moss M S G	Smoke M S G	Frame Grey M S G	Raven M S G
Platinum S G	Champagne S G	Gold S G	Cognac S G	Gunmetal S G
Pewter S G	Antique Brass S G	Bronzed S G	Polished Nickel + G	

Due to printing limitations colours in this brochure may not be accurate
Samples are available on request - www.bradleycollection.com/samples/

Ⓜ A finishing charge will apply Ⓢ Longer lead-times will apply Ⓤ



Pictured left to right:
Round Ø50mm (2") Pole • Flute • Antique Brass - Gloss
Squat Globe • Pewter - Gloss • Templar • Bronzed - Gloss
Globe • Champagne - Gloss





Pictured left to right:
Round ø50mm (2") Pole • Ribbed Globe • Bronze Art
Cut Crystal Templar • Old Brass • Flute • Old Pewter






FINISHES

FLUID METAL™

Technology and aesthetics meet with Fluid Metals. A first for drapery hardware, this innovative specialist finishing technique allows authentic metal coatings to be applied onto any substrate. Elysian designs look stunning in these new metal coats.

		
Old Silver ☉☉☉☹	Old Pewter ☉☉☉☹	Old Brass ☉☉☉☹
		
Light Bronze ☉☉☉☹	Bronze Art ☉☉☉☹	

ARCHITECTURAL METALLICS

		
Dawn	Mist	Sunset
		
Night Sky	Midnight	

☉ A finishing charge will apply ☹ Longer lead-times will apply ☹ Fluid Metal finishes are supplied unlacquered and will tarnish over time, a clear lacquer may be applied on request as a custom finish
☹ Fluid Metal finishes are hand produced, finish may vary.



FINIALS

Traditional styling cues have been streamlined to suit modern living, resulting in the distinctive curvilinear character of Elysian.

Pictured Top: ø50mm (2") • Charm • Champagne - Gloss
Halo • Gold - Gloss • Squat Globe • Bronzed - Gloss
Crystal Globe • Gunmetal - Gloss • Templar • Antique Brass - Gloss
Flute • Pewter - Gloss • Globe • Platinum - Gloss
Crystal Templar • Cognac - Gloss



Halo

ø30mm (1 3/16") Inclusive Length 5mm (3/16")
ø38mm (1 1/2") Inclusive Length 2mm (1/16")
ø50mm (2") Inclusive Length 2mm (1/16")



Charm

ø30mm (1 3/16") Inclusive Length 69mm (2 11/16")
ø38mm (1 1/2") Inclusive Length 85mm (3 3/8")
ø50mm (2") Inclusive Length 117mm (4 5/8")



Globe

ø30mm (1 3/16") Inclusive Length 73mm (2 7/8")
ø38mm (1 1/2") Inclusive Length 92mm (3 5/8")
ø50mm (2") Inclusive Length 114mm (4 1/2")



Templar

ø30mm (1 3/16") Inclusive Length 79mm (3 1/8")
ø38mm (1 1/2") Inclusive Length 92mm (3 5/8")
ø50mm (2") Inclusive Length 119mm (4 11/16")



Squat Globe

ø30mm (1 3/16") Inclusive Length 53mm (2 1/8")
ø38mm (1 1/2") Inclusive Length 63mm (2 1/2")
ø50mm (2") Inclusive Length 81mm (3 1/8")



Crystal Globe*

ø30mm (1 3/16") Inclusive Length 73mm (2 7/8")
ø38mm (1 1/2") Inclusive Length 92mm (3 5/8")
ø50mm (2") Inclusive Length 114mm (4 1/2")



Crystal Templar*

ø30mm (1 3/16") Inclusive Length 79mm (3 1/8")
ø38mm (1 1/2") Inclusive Length 92mm (3 5/8")
ø50mm (2") Inclusive Length 119mm (4 11/16")



Flute

ø30mm (1 3/16") Inclusive Length 73mm (2 7/8")
ø38mm (1 1/2") Inclusive Length 69mm (2 11/16")
ø50mm (2") Inclusive Length 114mm (4 1/2")



Ribbed Globe

ø30mm (1 3/16") Inclusive Length 73mm (2 7/8")
ø38mm (1 1/2") Inclusive Length 92mm (3 5/8")
ø50mm (2") Inclusive Length 114mm (4 1/2")








Cut Crystal Templar*


ø50mm (2") Inclusive Length 119mm (4 11/16")

*: Crystal Finials should not be positioned in direct sunlight




SINGLE BRACKETS

Side		Diameter	Projection from wall to pole centre	Fixing plate size
		ø30mm (1 3/16")	100mm (4")	w40mm (1 9/16") x H86mm (3 3/8")
		ø38mm (1 1/2")	100mm (4")	w50mm (2") x H105mm (4 1/8")
		ø50mm (2")	100mm (4")	w50mm (2") x H105mm (4 1/8")
Mid	Passing	Diameter	Projection from wall to pole centre	Fixing plate size
 		ø30mm (1 3/16")	100mm (4")	w86mm (3 3/8") x H40mm (1 9/16")
		ø38mm (1 1/2")	100mm (4")	w105mm (4 1/8") x H50mm (2")
		ø50mm (2")		w105mm (4 1/8") x H50mm (2")
Ceiling	Passing	Diameter	Drop from ceiling to pole centre	Fixing plate size
 		ø30mm (1 3/16")	100mm (4")	w86mm (3 3/8") x H40mm (1 9/16")
		ø38mm (1 1/2")	100mm (4")	w105mm (4 1/8") x H50mm (2")
		ø50mm (2")	100mm (4")	w105mm (4 1/8") x H50mm (2")




RECESS BRACKETS

Recess with ring stop	Diameter	Depth off wall	Fixing plate size
	ø30mm (1 3/16")	10mm (3/8")	ø40mm (1 9/16")
	ø38mm (1 1/2")	12mm (1/2")	ø49mm (1 15/16")
	ø50mm (2")	15mm (9/16")	ø64mm (2 1/2")

ADJUSTABLE BRACKETS

Side		Diameter	Projection from wall to pole centre	Fixing plate size
		ø30mm (1 3/16")	Min. 100mm (4") Max. 170mm (6 11/16")	w40mm (1 9/16") x H86mm (3 3/8")
		ø38mm (1 1/2")	Min. 100mm (4") Max. 170mm (6 11/16")	w50mm (2") x H105mm (4 1/8")
		ø50mm (2")	Min. 100mm (4") Max. 170mm (6 11/16")	w50mm (2") x H105mm (4 1/8")
Mid	Passing	Diameter	Projection from wall to pole centre	Fixing plate size
 		ø30mm (1 3/16")	Min. 100mm (4") Max. 170mm (6 11/16")	w86mm (3 3/8") x H40mm (1 9/16")
		ø38mm (1 1/2")	Min. 100mm (4") Max. 170mm (6 11/16")	w105mm (4 1/8") x H50mm (2")
		ø50mm (2")	Min. 100mm (4") Max. 170mm (6 11/16")	w105mm (4 1/8") x H50mm (2")

DOUBLE BRACKETS

Side		Diameter	Projection from wall to pole centre	Fixing plate size	
		Fø38mm (1 1/2")	F200mm (8")	w50mm (2") x	
		Bø30mm (1 3/16")	B60mm (2 3/8")	H105mm (4 1/8")	
		Fø50mm (2")	F200mm (8")	w50mm (2"). x	
		Bø30mm (1 3/16")	B60mm (2 3/8")	H105mm (4 1/8")	
Mid	Passing	Diameter	Projection from wall to pole centre	Mid Fixing plate size	Passing Fixing plate size
 		Fø38mm (1 1/2")	F200mm (8")	w105mm (4 1/8") x	w105mm (4 1/8") x.
		Bø30mm (1 3/16")	B60mm (2 3/8")	H50mm (2")	H73mm (2 7/8")
		Fø50mm (2")	F200mm (8")	w105mm (4 1/8") x	w105mm (4 1/8") x
		Bø30mm (1 3/16")	B60mm (2 3/8")	H50mm (2")	H73mm (2 7/8")

CUSTOM BRACKETS

Special projection brackets and specialist designs can be produced for awkward or unusual installations.

			
Custom Projection	Custom Fixing Plate	Uplift	Angled Brackets
Specify the exact projection needed.	Relevant where space is restricted or weight is a concern.	Helps negotiate cornice and similar architectural features.	The solution for tight and awkward locations.

LINED RINGS

Ring	Passing Ring	Diameter	Ring drop from top of pole to bottom of ringlet
		ø30mm (1 3⁄16")	51mm (2")
		ø38mm (1 1⁄2")	66mm (2 5⁄8")
		ø50mm (2")	80mm (3 1⁄8")

POLES

Poles are cut, bent and curved to suit individual requirements.
When calculating the length of your pole, remember to allow tolerance beyond the width of the frame for the curtains to draw back to the edge of the window.

Maximum pole length in one piece 4.0m (157").
Poles exceeding the recommended maximum distance between brackets, will be cut into equal parts unless otherwise specified.
Pole joiners will be supplied.

Diameter	Recommended maximum distance between brackets	Recommended curtain type for pole diameter	Minimum bend radius
ø30mm (1 3⁄16")	2100mm (83")	Medium weight, lined & interlined curtains	ø255mm (10")
ø38mm (1 1⁄2")	2200mm (87")	Medium to heavy weight, lined & interlined curtains	ø255mm (10")
ø50mm (2")	2400mm (96")	Heavy weight interlined curtains	ø255mm (10")

ACCESSORIES

Ombres



Internal projection from wall: 150mm (5 15⁄16")
Fixing plate size: ø68mm (2 11⁄16")

Hold back



Internal measurement: 137mm (5 3⁄8")
Fixing plate size: ø44mm (1 3⁄4")

Tie Back Hook



Projection: 29mm (1 1⁄8")
Fixing plate size: w25mm (1") x h74mm (2 15⁄16")

Draw Rods®

Fine Standard



Draw rod length:
1000mm (39 3⁄8")
Custom lengths available to order



CONTOUR

This collection has poise and a clear sense of purpose.
Natural material but streamlined, matte and minimalist.

Truly original, Contour is the wood pole re-imagined.

Pictured: ø50mm (2") Wood Pole • Oak • Disc • Old Silver

CONTOUR

MATERIALS

Contour is available in a selection of fine woods, presented in a contemporary low sheen finish. Poles may also be specified in Fluid Metal coats.



FINISH

Steel components are available in a choice of Fluid Metal finishes, all of which may be mixed with natural wood.



INNOVATION

The 'almost invisible' brackets of Contour are a design breakthrough. They deliver the ultimate streamlined look with no compromise on strength.



FINISHES

Steel components are available in a carefully curated selection of coated finishes, as well as stunning Fluid Metal.



LENGTH

Poles can be cut to any length.© Innovative passing bracket & ring system allows drapes to travel seamlessly along the full system length.



DETAIL

The optional Bracket Band and Thumb Wheel may be specified as a design accent.





Pictured left to right:
ø50mm (2") • Ribbed Ball • Old Pewter
ø50mm (2") Wood Pole • Cherry • Squat Ball • Bronze Art
ø50mm (2") Wood Pole • Ash • Disc • Old Brass










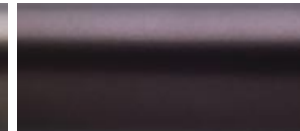
FINISHES

With modern design sensibility to the fore, Contour is presented in a selection of high-quality woods with a low-level sheen as standard.

Metal components are available in an edit of our signature coated finishes and the luxurious Fluid Metal finishes.

COATED

Available in three coat options, **Matte** ☹, **Satin** ☺, & **Gloss** ☻. Other standard finishes are available on request.

				
Moss ☹☺☻	Smoke ☹☺☻	Cocoa ☹☺☻	Flint ☹☺☻	Raven ☹☺☻
				
Platinum ☺☻	Champagne ☺☻	Gold ☺☻	Antique Brass ☺☻	Bronzed ☹☺☻

FLUID METAL™

Fluid Metals are derived from leading edge finishing technology, allowing true metal coatings to be applied to any substrate. These luxurious finishes are the prefect treatment for this esoteric collection.

				
Old Silver ☺☻👤	Old Pewter ☺☻👤	Old Brass ☺☻👤	Light Bronze ☺☻👤	Bronze Art ☺☻👤

WOOD POLE & FINIAL FINISHES

Other wood stained finishes are available on request.

				
Ash	Oak	Cherry	Walnut	Black Ash Stain Over Ash

☺ Longer lead-times will apply ☻ Fluid Metal finishes are supplied unlacquered and will tarnish over time, a clear lacquer may be applied on request as a custom finish
👤 Fluid Metal finishes are hand produced, finish may vary.
Due to printing limitations colours in this brochure may not be accurate. Samples are available on request - www.bradleycollection.com/samples/

FINIALS

With suitable deference to period styling, Contour sharpens and cleans traditional motifs to suit a more modern idiom.



Pictured left to right:
ø50mm (2") Wood Pole • Wooden Ribbed Ball • Walnut & Bronze Art
ø50mm (2") Wood Pole • Wooden Ball • Ash & Burnished Silver
ø50mm (2") Wood Pole • Wooden Squat Ball • Oak & Old Brass



Disc
Inclusive Length 7mm (1/4")
Finished in Old Silver • Black Ash



Squat Ball
Inclusive Length 92mm (3 5/8")
Finished in Bronze Art • Cherry



Wooden Squat Ball
Inclusive Length 92mm (3 5/8")
Finished in Old Silver • Oak



Ball
Inclusive Length 118mm (4 5/8")
Finished in Light Bronze



Wooden Ball
Inclusive Length 118mm (4 5/8")
Finished in Bronze Art • Ash






Ribbed Ball
Inclusive Length 118mm (4 5/8")
Finished in Old Pewter



Wooden Ribbed Ball
Inclusive Length 118mm (4 5/8")
Finished in Old Brass • Walnut

CONTOUR

SINGLE BRACKETS

Side 	Diameter ø50mm (2")	Projection from wall to pole centre 100mm (4")	Fixing plate size w52mm (2 1/8") x h104mm (4 1/8")
Mid Passing 	Diameter ø50mm (2")	Projection from wall to pole centre 100mm (4")	Fixing plate size w104mm (4 1/8") x h52mm (2 1/8")
Ceiling Passing 	Diameter ø50mm (2")	Drop from ceiling to pole centre 100mm (4")	Fixing plate size w104mm (4 1/8") x h52mm (2 1/8")





Optional Bracket Band & Thumb wheel

The Contour bracket is designed to be totally unintrusive. The Bracket Band and Thumb Wheel allow subtle extra detailing to be added.





CUSTOM BRACKETS

Contour can be customised to suit virtually any window.

			
Custom Projection Specify the exact projection needed.	Custom Fixing Plate Relevant where space is restricted or weight is a concern.	Uplift Helps negotiate cornice and similar architectural features.	Angled Brackets The solution for tight and awkward locations.

RINGS

Superbly engineered rings are available in both hoop and passing ring styles.

Ring 	Passing Ring 
Diameter ø50mm (2")	Ring drop 81mm (3 3/16") from top of pole to bottom of ringlet



LINED POLE

Contour incorporates a low friction liner to allow smooth operation of rings.


Poles are cut, bent and curved to suit individual requirements. When calculating the length of your pole, remember to allow tolerance beyond the width of the frame for the curtains to draw back to the edge of the window.

Maximum pole length in one piece 2.4m (96"). Poles exceeding the recommended maximum distance between brackets, will be cut into equal parts unless otherwise specified. Pole joiners will be supplied.

Diameter ø50mm (2") Wood	Recommended maximum distance between brackets 2100mm (82.5")	Recommended curtain type Heavy weight interlined curtains	Minimum bend radius R200mm (8")
-----------------------------	---	--	------------------------------------

ELECTRIC WOOD POLES

All the virtues of Contour can be combined with the luxury and convenience of electric. Contour designs, materials and finishes are all available as electric curtain pole options. Visit www.bradleycollection.com/electric

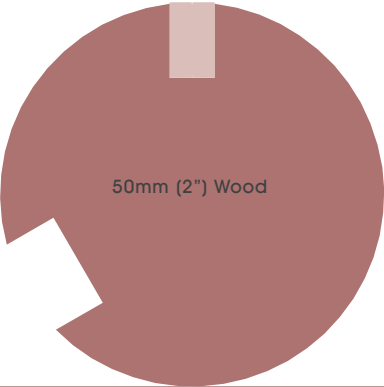



⚡ | ECLIPSE

Peerless and opulent, this collection truly has no rival.

A rare, luxurious aesthetic and freedom of expression in design are balanced with the final word in functionality and control.

The world's finest.

Pictured: ø38mm (1 1/2") Coverpole • Standard Stud • Brass Toned
Project by: Gallagher London - London SW7 - UK

LEADING MOTOR OPTIONS

Eclipse may be specified with your choice from the leading motorised systems. This provides power and control options ranging from standalone battery powered systems to fully integrated home automation solutions.



For Double pole systems, a hand drawn rear pole may be specified if preferred.




LENGTH

Poles can be supplied to any length[Ⓢ], subject to maximum weight loadings of the selected motorised system.



BENT TO SHAPE

A bespoke bay bending service is available on all diameters to allow the perfect shaped pole to fit any bay window.

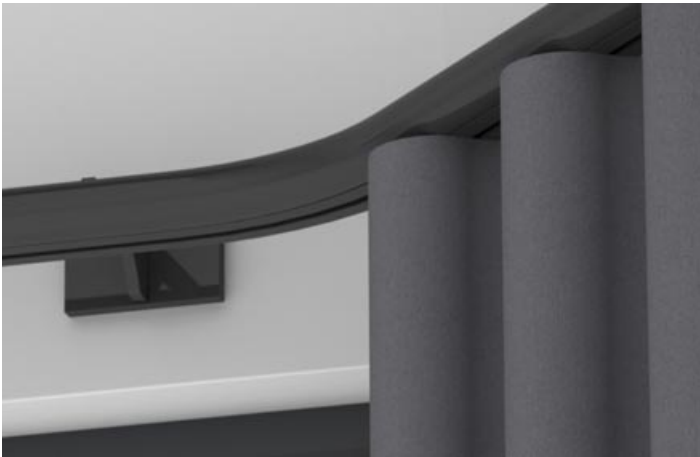

SCALE

Eclipse poles are available in two pole diameters, Ø38mm (1½”) • 50mm (2”). Finial designs are carefully scaled to maintain the system aesthetic.



DETAILING

The secret of any design is in the detail. Eclipse now includes a complementary finish to nylon end housings, for a harmonious tonal effect.



FUNCTION

A range of bracket options have been designed to ensure simple installation, including flush fit ceiling brackets.



MODERN HEADINGS


The choice of motor systems means that modern headings can be accommodated, with both Wave[®] and Ripplefold[®] styles available.




Ⓢ Supplied in sections - Maximum section length 2.9m (114”)

FINISHES

A brushed stainless steel base gives an edgy feel, with specially developed tints providing a change of mood to suit the needs of the project.

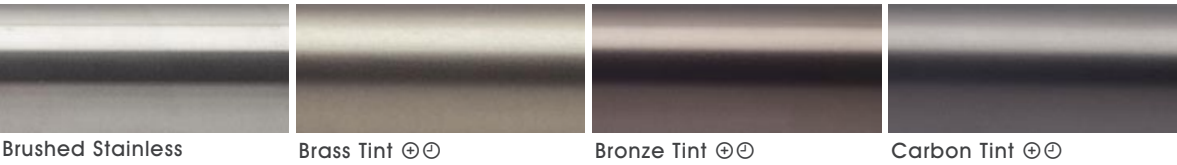

The beauty of the mild steel base shines through with these special translucent finishes.

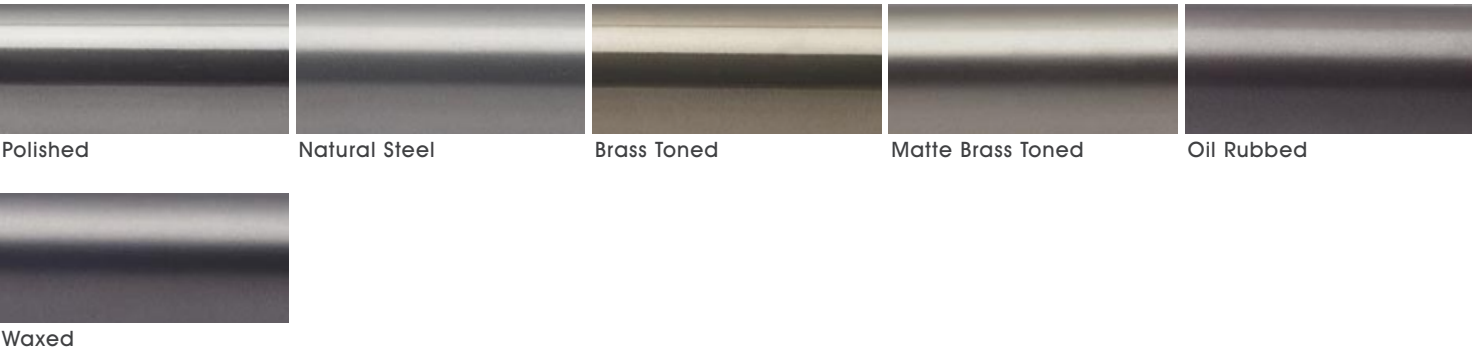

ARCHITECTURAL METALLICS



Due to printing limitations colours in this brochure may not be accurate
Samples are available on request - www.bradleycollection.com/samples/

Coat Options



All poles and components may be specified in this stunning palette of colours and finishes, with a choice of coat options throughout.



(M) A finishing charge will apply (S) Longer lead-times will apply



Pictured: ø38mm (1 1/2") Coverpole - Somfy • Contrast Stud • Light Bronze

FINISHES

FLUID METAL™

Leading edge technology allows authentic metal coats to be applied to any substrate, which can then be worked and aged for a truly luxurious result.

		
Old Silver ☺☺☺👤	Old Pewter ☺☺☺👤	Old Brass ☺☺☺👤
		
Light Bronze ☺☺☺👤	Bronze Art ☺☺☺👤	

☺ A finishing charge will apply ☺ Longer lead-times will apply ☺ Fluid Metal finishes are supplied unlacquered and will tarnish over time, a clear lacquer may be applied on request as a custom finish
👤 Fluid Metal finishes are hand produced, finish may vary.

FINIALS

This design edit provides a solution for any project. Sharp, geometric designs give Eclipse a thoroughly modern persona, while rounded design cues offer a more classic feel, albeit still expressed with a more contemporary hand.

Pictured: ø38mm (1 1/2") Coverpole - Silent Gliss • Faceted Disc • Brushed Stainless



Flush End Cap® - Supplied as standard

ø38mm (1 1/2") **Inclusive Length** 6mm (1/4")
ø50mm (2") **Inclusive Length** 6mm (1/4")



Contrast Stud

ø38mm (1 1/2") **Inclusive Length** 20mm (3/4")
ø50mm (2") **Inclusive Length** 23mm (7/8")



Standard Stud

ø38mm (1 1/2") **Inclusive Length** 9mm (3/8")
ø50mm (2") **Inclusive Length** 10mm (3/8")



Large Disc

ø38mm (1 1/2") **Inclusive Length** 7mm (1/4")
ø50mm (2") **Inclusive Length** 8mm (5/16")



Button Stud

ø38mm (1 1/2") **Inclusive Length** 58mm (2 3/16")
ø50mm (2") **Inclusive Length** 69mm (2 11/16")



Faceted Disc

ø38mm (1 1/2") **Inclusive Length** 45mm (1 3/4")
ø50mm (2") **Inclusive Length** 59mm (2 3/16")



Ball & Collar

ø38mm (1 1/2") **Inclusive Length** 86mm (3 3/8")
ø50mm (2") **Inclusive Length** 106mm (4 3/16")








Ball

ø38mm (1 1/2") **Inclusive Length** 86mm (3 3/8")
ø50mm (2") **Inclusive Length** 106mm (4 3/16")

● Please note that if this option is selected finials cannot be added at a later date.
For full technical information, sizes and weights please download the specification guide - www.bradleycollection.com/specification-guides/




SINGLE BRACKETS

Side		Diameter	Projection from wall to track centre	Fixing plate size
		ø38mm (1 1/2") ø50mm (2")	100mm (4") 100mm (4")	w52mm (2 1/8") x h104mm (4 1/8") w52mm (2 1/8") x h104mm (4 1/8")
Mid	Mid - Joining	Diameter	Projection from wall to track centre	Fixing plate size
		ø38mm (1 1/2") ø50mm (2")	100mm (4") 100mm (4")	w104mm (4 1/8") x h52mm (2 1/16") w104mm (4 1/8") x h52mm (2 1/16")
Flush	Flush - Joining	Diameter	Drop from ceiling to top of pole	Fixing plate size
		ø38mm (1 1/2") ø50mm (2")	3mm (1/8") 3mm (1/8")	w70mm (2 3/4") x h34mm (1 5/16") w70mm (2 3/4") x h34mm (1 5/16")



Pictured: Fø38mm (1 1/2") Coverpole - Lutron • Contrast Stud Bø38mm (1 1/2") Coverpole - Lutron • Endcap • Flint

DOUBLE BRACKETS

Side		Diameter	Projection from wall to track centre	Fixing plate size
		Fø38mm (1 1/2") Bø38mm (1 1/2") Fø38mm (1 1/2") B Uncovered track Fø50mm (2") Bø50mm (2") Fø50mm (2") Bø38mm (1 1/2") Fø50mm (2") B Uncovered track	F160mm (6 5/16") B 60mm (2 3/8") F160mm (6 5/16") B 60mm (2 3/8") F160mm (6 5/16") B 60mm (2 3/8") F160mm (6 5/16") B 60mm (2 3/8") F160mm (6 5/16") B 60mm (2 3/8")	w52mm (2 1/8") x h104mm (4 1/8") w52mm (2 1/8") x h104mm (4 1/8") w52mm (2 1/8") x h104mm (4 1/8") w52mm (2 1/8") x h104mm (4 1/8") w52mm (2 1/8") x h104mm (4 1/8")
Mid	Mid - Joining	Diameter	Projection from wall to track centre	Fixing plate size
		Fø38mm (1 1/2") Bø38mm (1 1/2") Fø38mm (1 1/2") B Uncovered track Fø50mm (2") Bø50mm (2") Fø50mm (2") Bø38mm (1 1/2") Fø50mm (2") B Uncovered track	F160mm (6 5/16") B 60mm (2 3/8") F160mm (6 5/16") B 60mm (2 3/8") F160mm (6 5/16") B 60mm (2 3/8") F160mm (6 5/16") B 60mm (2 3/8") F160mm (6 5/16") B 60mm (2 3/8")	w104mm (4 1/8") x h52mm (2 1/16") w104mm (4 1/8") x h52mm (2 1/16") w104mm (4 1/8") x h52mm (2 1/16") w104mm (4 1/8") x h52mm (2 1/16") w104mm (4 1/8") x h52mm (2 1/16")

CUSTOM BRACKETS

Eclipse can be customised to suit virtually any window.

				
Custom Projection	Custom Fixing Plate	Uplift	Dropdown Ceiling	Angled Brackets
Specify the exact projection needed.	Relevant where space is restricted or weight is a concern.	Helps negotiate cornice and similar architectural features.	Specify exact projection required from ceiling.	The solution for tight and awkward locations.

ELECTRIC DRAPERY HARDWARE

For the full range of Electric poles and tracks visit www.bradleycollection.com/electric

SILENT GLISS® 5600



- Straight poles maximum length 15 Metres (49ft)Ⓢ

Bespoke bay serviceⓈ

Standard gliders and rollers & Wave® gliders and rollers

DC & AC hidden motor options
- Touch and go manual operation

System allows manual operation during power failure

Quiet motors, noise level at 300mm (1') <36dBA

Wireless remote control, app control or home automation integration

MOTOR OPTIONS

9060 Motor



Mains powered motor option.
Requires professional installation.
Suitable for systems up to 15M (49ft).

9060 Motor with radio module



Mains powered motor, with radio module for use.
with remote control options.
Requires professional installation.
Suitable for systems up to 15M (49ft).

Smart Expansion ModuleⓈ also available.


CONTROL OPTIONS

Remote Control



Single & Multi-channel hand held remote control options available.

App Control Move & Smart



The system can be controlled with the Silent Gliss Move[®] app to allow control on smart devices.
Or via the Smart[®] system allowing two way integration with all major home control systems

Automation systems



The system can also be intergrated with all major home control systems.Ⓢ

GLIDING OPTIONS

Silent Gliss 5600 is available in 4 gliding options: Standard Gliders & Rollers, or Wave® Gliders & Rollers to be used with Wave® header tape.

Gliders



Drop from bottom of track:
20mm (13/16")

RollersⓈ



Drop from bottom of track:
20mm (13/16")

Wave® gliders



Drop from bottom of track:
20mm (13/16")
Wave® Pitch:
80mm (3 1/8")

Wave® rollersⓈ



Drop from bottom of track:
20mm (13/16")
Wave® Pitch:
80mm (3 1/8")

POLES

Poles are cut and bent to suit individual requirements. When calculating the length of your pole, remember to allow tolerance beyond the width of the frame for the curtains to stack back to the edge of the window.

Maximum Coverpole length in one piece 2.9m (114")Ⓢ. Poles exceeding the maximum length will be cut into equal parts unless otherwise specified. A joining bracket will need to be specified.



Size
ø38mm (1 1/2")
ø50mm

Maximum distance between brackets
1500mm (60")
1500mm (60")

Minimum bend radius
R275mm (10 13/16")
R275mm (10 13/16")

Ⓢ Move server set 9960 is required for use with this app Ⓢ Smart only available in United Kingdom, requires Smart Expansion Module Ⓢ Specialist support & additional components required
Weight restrictions apply. For full technical information please refer to the specification guide. www.bradleycollection.com/specification-guides/

Ⓢ Supplied in sections - maximum section length 2.9m (9.5ft) Ⓢ Brushed finishes not available with bends Ⓢ Supplied as standard on systems over 2.9m (9.5ft) with single stack curtains

SOMFY®





GLYDEA, IRISMO & MOVELITE



Straight poles maximum length 12 Metres (39ft)Ⓢ
Bespoke bay serviceⓈⓈ
Standard roller, Ripple rollers and Ripplefold® rollers
Mains & Battery powered motor options
Touch and go manual operation

System allows manual operation during power failure
Quiet motors, noise level at 1000mm (3') <44dBA
Fully compatible with Somfy RTS
Wireless remote control, app control or home automation integration

MOTOR OPTIONS




Glydea Ultra 60e  WT • DCT • RTS Mains powered motor. RTS includes integrated radio receiver for use with remote control options. Requires professional installation. Suitable for systems up to 12M (39ft).	Irismo 45 WF  RTS Battery powered motor, with integrated radio receiver for use with remote control options. Single charge lasts up to six months. Requires no pre-wiring. Suitable for systems up to 10M (33ft).	Movelite 35  WT • DCT • RTS Mains powered motor. RTS includes integrated radio receiver for use with remote control options. Requires professional installation. Suitable for systems up to 10M (33ft).	Movelite 35 WF  RTS Battery powered motor, with integrated radio receiver for use with remote control options. Single charge lasts up to four months. Requires no pre-wiring. Suitable for systems up to 6M (19ft)Ⓢ.
---	--	--	---

CONTROL OPTIONS

Remote Control  Single channel & Multi-channel hand held remote control options available.	App Control  The system can be controlled with the Somfy Tahoma app or through smart devices & Amazon Alexa.	Automation systems <div></div> The system can also be intergrated with all major home control systems.Ⓢ
--	--	--

GLIDING OPTIONS

Somfy is available in 3 gliding options: Standard Rollers, Ripple Rollers, to be used with wave-style header tape. Or Ripplefold® Rollers to be used with Graber or Kirsch snap header tape.

Rollers  Drop from bottom of track: 20mm (13/16")	Ripple rollers  Drop from bottom of track: 20mm (13/16") Ripple Pitch: 80mm (3 1/8")	Ripplefold® rollers  Drop from bottom of track: 20mm (13/16") Ripplefold® Fullness: 80% • 100% • 120%
---	---	--

POLES

Poles are cut and bent to suit individual requirements. When calculating the length of your pole, remember to allow tolerance beyond the width of the frame for the curtains to stack back to the edge of the window.

Maximum Coverpole length in one piece 2.9m (114")Ⓢ. Poles exceeding the maximum length will be cut into equal parts unless otherwise specified. A joining bracket will need to be specified.

		
Size ø38mm (1 1/2") ø50mm	Maximum distance between brackets 1500mm (60") 1500mm (60")	Minimum bend radius R275mm (10 13/16") R275mm (10 13/16")

Ⓢ Movelite35 WF is not suitable for bay bends Ⓢ Specialist support & additional components required
Weight restrictions apply. For full technical information please refer to the specification guide. www.bradleycollection.com/specification-guides/

Ⓢ Supplied in sections - maximum section length 2.9m (9.5ft) Ⓢ Brushed finishes not available with bends

Straight poles maximum length 9 Metres (29.5ft)Ⓢ
Bespoke bay serviceⓈ
Standard roller and Ripplefold® rollers
Low voltage concealed motors

Three motor ratings for differing curtain weights
Quiet motors, noise level at 1000mm (3') <44dBa
Fully compatible with Lutron® QS Home Automation systems
Wireless remote control, app control or home automation integration

MOTOR OPTIONS

Motor



D105 • D145 • D175
Mains powered motor options
.Requires professional installation.
Suitable for systems up to 15M (49ft).

Motor
with radio dongle



D105 • D145 • D175
Mains powered motor options , with radio
dongle for use with remote control options.
Requires professional installation.
Suitable for systems up to 15M (49ft).

CONTROL OPTIONS

Remote Control



Single hand held remote control
option available.

App Control
RA2 Select Hub



The system can be controlled with the Lutron app
or through smart devices & Amazon Alexa.

Automation systems



The system can also be intergrated with all major
home control systems.Ⓢ

GLIDING OPTIONS

Lutron can be supplied with 2 gliding options: Standard Rollers, or Ripplefold® Rollers to be used with Graber or Kirsch snap header tape.

Rollers



Drop from bottom of track:
12mm (7/16")

Ripplefold® rollers



Drop from bottom of track:
20mm (13/16")
Ripplefold® Fullness:
80% • 100% • 120%

POLES

Poles are cut and bent to suit individual requirements. When calculating the length of your pole, remember to allow tolerance beyond the width of the frame for the curtains to stack back to the edge of the window.

Maximum Coverpole length in one piece 2.9m (114")Ⓢ. Poles exceeding the maximum length will be cut into equal parts unless otherwise specified. A joining bracket will need to be specified.



Size
ø38mm (1 1/2")
ø50mm

Maximum distance between brackets
1500mm (60")
1500mm (60")

Minimum bend radius
R275mm (1013/16")
R275mm (1013/16")

Ⓢ Specialist support & additional components required
Weight restrictions apply. For full technical information please refer to the specification guide. www.bradleycollection.com/specification-guides/

Ⓢ Supplied in sections - maximum section length 2.9m (9.5ft) Ⓢ Brushed finishes not available with bends