CONTACT

www.bradleycollection.com

066300

UK & REST OF THE WORLD

USA & CANADA

𝔄 +44 (0)1449 722 724
 𝒜 info@bradleycollection.com

LONDON SHOWROOM

🜭 +44 (0)207 871 7793

🛷 showroom@studiotwochelsea.com

ELYSIAN

THE **BRADLEY** COLLECTION

Specialised fixings for mounting brackets will be required in certain situations and are not provided as standard. Steel items are not recommended for damp conditions such as shower rooms. Crystal finials should not be positioned in direct sunlight, and are not suitable for use in conservatories. Fluid Metal items are supplied unlacquered and will tarnish over time.

The Bradley Collection reserves the right to modify design and materials without prior notice as part of a process of continual product improvement. Due to printing limitations, colours in this brochure may not be accurate.

Products are protected by Design Rights, under provisions of Copyright, Designs & Patents Act 1988. Bradley®, The Bradley Collection® and ② Logo are registered Community trademarks of The Bradley Collection Ltd. in Europe and registered trademarks of the Bradley Collection, Inc. in the USA.

The Bradley Collection Ltd Lion Barn • Maitland Road • Needham Market • Suffolk • IP6 8NS • UK

Printed: 1023 • Copyright © The Bradley Collection Ltd. 2023



9 | THE BRADLEY COLLECTION



ELYSIAN

Elysian bridges the gap between two very different aesthetics, combining pared down modernist style with decorative sensibility.

Offered in an inspirational palette of solid and metallic finishes, in three diameters.

Pictured: ø50mm (2") Pole • Templar • Flint - Satin Interior Design: Wynd Design • Wynyard – UK | @ wynddesign

ELYSIAN

LENGTH

Elysian can be cut to any length. $^{\Theta}$ Passing brackets & rings allow drapes to travel the full system length.



FUNCTION

A range of bracket options have been designed to allow easy installation. All wall & ceiling brackets have a magnetic cover plate to hide screw fixings. Brackets can also be supplied to custom lengths and designs.



SHAPE

Elysian offers a bespoke bay bending and curving service to fit any bay window.



DETAIL

Thoughtfully designed accessories improve functionality of the system without compromising the aesthetic.



⊕ Supplied in sections - Maximum section per length 4.0m (157")
 Section lengths over 2.4m (94") will incur a handling charge

SCALE


Available in three pole diameters \emptyset 30mm (1³/₁₆") • 38mm (1¹/₂") • 50mm (2"). Each component is carefully designed and scaled to reflect the design intent.





FINISHES

An unparalleled selection of coated and plated finishes, allows Elysian to express emotions ranging from the sober and understated to the glamorous and flamboyant.

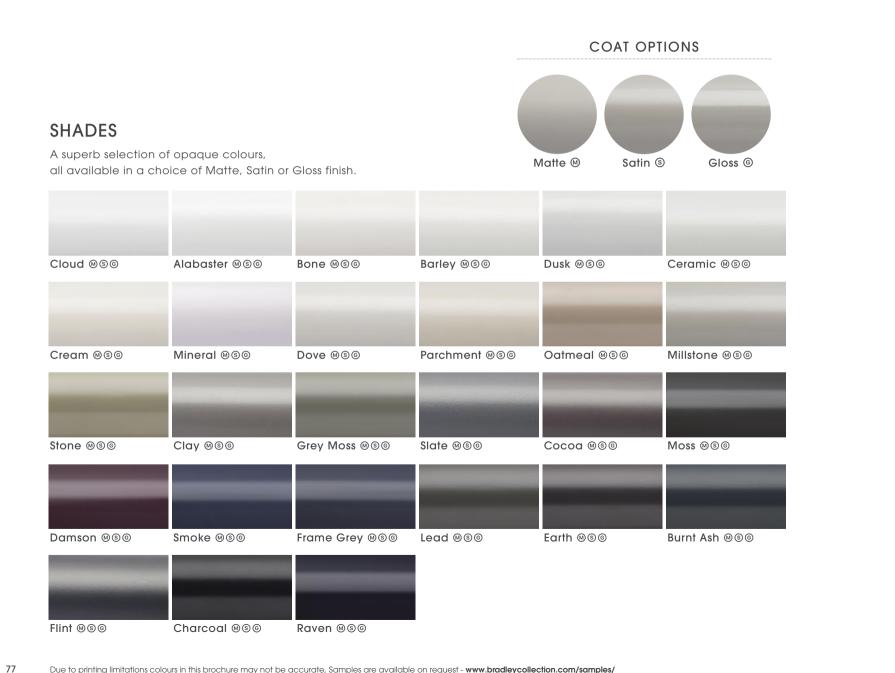

METALLICS

High metallic fleck coatings with most available in Satin and Gloss sheen levels.



ANODIC METALS

A flat metal colour group, with an anodised style surface texture.

		l
wilight	Glow	SI







škv



SPECIALIST FINISHES

Specialist techniques are employed to deliver additional finish choices. These more complex finishes are available at a premium cost and with longer lead times.

FLUID METAL[™]

This innovative process involves applying authentic metal coatings to any substrate.



Old Brass ⊕@@ ♥



Light Bronze ⊕@@♥



Bronze Art ⊕@@♥

PLATED

Polished plated finishes provide a traditional sense of luxury.







Halo

 ø30mm (1½/i°")
 Inclusive Length 5mm (¾/i°")

 ø38mm (1½")
 Inclusive Length 2mm (¼/i°")

 ø50mm (2")
 Inclusive Length 2mm (½/i°")



Aura ø30mm (1³/16") Inclusive Length 5mm (³/16") ø38mm (11/2") Inclusive Length 2mm (1/16") ø50mm (2") Inclusive Length 2mm (1/16")



Orbit ø30mm (1³/16") Inclusive Length 36mm (1⁷/16") ø38mm (1¹/2") Inclusive Length 40mm (1⁵/8") ø50mm (2") Inclusive Length 52mm (2¹/16")



Squat Globe ø30mm (1³/₁₆") Inclusive Length 53mm (2¹/₁₆") ø38mm (1¹/₂") Inclusive Length 63mm (2¹/₂") ø50mm (2") Inclusive Length 81mm (3³/₁₆")



ø30mm (1³/₁₆") Inclusive Length 69mm (2¹¹/₁₆")
 ø38mm (1¹/₂") Inclusive Length 85mm (3³/₈")
 ø50mm (2") Inclusive Length 117mm (4⁵/₈")



Discus

 $\begin{array}{l} {\rm \textit{σ30mm (13'{16}'')$ Inclusive Length 39mm (11'{2}'')$ } \\ {\rm \textit{σ38mm (11'{2}'')$ Inclusive Length 44mm (13'{4}'')$ } \\ {\rm \textit{σ50mm (2'')$ Inclusive Length 58mm (25'{16}'')$ } \\ \end{array}$



Jewel ø30mm (1³/₁₆") Inclusive Length 37mm (1⁷/₁₆") ø38mm (1¹/₂") Inclusive Length 42mm (1⁵/₆") ø50mm (2") Inclusive Length 55mm (2¹/₈")



Flute ø30mm (1³/₁₆") Inclusive Length 73mm (2⁷/₈") ø38mm (1¹/₂") Inclusive Length 69mm (2¹¹/₁₆") ø50mm (2") Inclusive Length 114mm (4¹/₂")

79

For full technical information, sizes and weights please download the specification guide - www.bradleycollection.com/specification-guides



Globe

 σ30mm (1³/16") Inclusive Length 73mm (27/8")

 σ38mm (11/2") Inclusive Length 92mm (35/8")

 σ50mm (2") Inclusive Length 114mm (41/2")



Ribbed Globe

Ø30mm (1³/16["]) Inclusive Length 73mm (2⁷/8["])
 Ø38mm (1¹/2["]) Inclusive Length 92mm (3⁵/8["])
 Ø50mm (2["]) Inclusive Length 114mm (4¹/2["])



Templar

ø30mm (1³/₀") Inclusive Length 79mm (3½")
 ø38mm (1½") Inclusive Length 92mm (3⁵/₀")
 ø50mm (2″) Inclusive Length 119mm (4¹¹/₁₀")



ø38mm (1½") Inclusive Length 92mm (35%") ø50mm (2") Inclusive Length 119mm (4½6")

SINGLE BRACKETS

Side		Diameter	Projection from wall to pole centre	Fixing plate size
N		ø30mm (1¾6″) ø38mm (1½″) ø50mm (2″)	100mm (4") 100mm (4") 100mm (4")	w40mm (1%)6″) x н86mm (3%)″) w50mm (2″) x н105mm (4%)″) w50mm (2″) x н105mm (4%)″)
Mid	Passing	Diameter	Projection from wall to pole centre	Fixing plate size
V		ø30mm (1³/16″) ø38mm (1½″) ø50mm (2″)	100mm (4″) 100mm (4″) 100mm (4″)	w86mm (3¾") x н40mm (1%") w105mm (4¼") x н50mm (2″) w105mm (4¼") x н50mm (2″)
Ceiling	Passing	Diameter	Drop from ceiling to pole centre	Fixing plate size
5	2	ø30mm (1³/16″) ø38mm (1½″) ø50mm (2″)	100mm (4″) 100mm (4″) 100mm (4″)	w86mm (3³/s″) x н40mm (1°/ıs″) w105mm (4½s″) x н50mm (2″) w105mm (4½s″) x н50mm (2″)

RECESS BRACKETS

Recess with ring stop

Diameter ø30mm (13/16") ø38mm (11/2") ø50mm (2")

Depth off wall 10mm (³/₅") 12mm (1/2") 15mm (%16")

Fixing plate size

ø40mm (1%16″) ø49mm (115/16") ø64mm (2½")

ADJUSTABLE BRACKETS

Side

Diameter

ø30mm (13/16") ø38mm (1½") ø50mm (2")

Projection from wall to pole centre

Min. 100mm (4") Max. 170mm (6¹¹/16") Min. 100mm (4") Max. 170mm (6¹¹/16") Min.100mm (4") Max.170mm (6¹¹/16")

Projection from wall to pole centre

Min.100mm (4") Max.170mm (6¹¹/16") Min.100mm (4") Max.170mm (6¹¹/16") Min.100mm (4") Max.170mm (6¹¹/16")


Fixing plate size

w40mm (1%16") х н86mm (33/8") w50mm (2") х н105mm (41/8") w50mm (2") х н105mm (41/8")

Fixing plate size

w86mm (33/8") х н40mm (19/16") w105mm (41/8 ") х н50mm (2") w105mm (41/в") х н50mm (2")

DOUBLE BRACKETS



CUSTOM BRACKETS

Special projection brackets and specialist designs can be produced for awkward or unusual installations.



Custom Projection

Specify the exact

projection needed.

Custom Fixing Plate Relevant where space is restricted or weight is a concern.

Mid

Passing

Diameter ø30mm (13/16") ø38mm (11/2") ø50mm (2")

Diameter Fø38mm (1½″) Bø30mm (1¾16″)	Projection from wall to pole centre F200mm (8") B60mm (2%")	w50mm (2″) x н105mm (4½")	
Fø50mm (2") Bø30mm (1³/ι₀")	F200mm (8") B60mm (2%")	w50mm (2″)x н105mm (4½″)	
Diameter	Projection from wall to pole centre	Mid Fixing plate size	Passing Fixing plate size
Diameter Fø38mm (1½″) Bø30mm (1³/16″)	Projection from wall to pole centre F200mm (8") B60mm (2%")	Mid Fixing plate size w105mm (41/8 ") x н50mm (2")	Passing Fixing plate size w105mm (41/8") x #50mm (2")





Uplift Helps negotiate cornice and similar architectural features.



Angled Brackets The solution for tight and awkward locations.

LINED RINGS

Passina Diameter Rina Ring ø38mm (11/2") ø50mm (2")

ø30mm (13/16")

Ring drop from top of pole to bottom of ringlet 51mm (2") 66mm (25/8") 80mm (31/8")

ACCESSORIES

Internal projection from wall: 150mm (5¹⁵/16") Fixing plate size: ø68mm (211/16")

POLES


Poles are cut, bent and curved to suit individual requirements. When calculating the length of your pole, remember to allow tolerance beyond the width of the frame for the curtains to draw back to the edge of the window.

Maximum pole length in one piece 4.0m (157").⊕ Poles exceeding the recommended maximum distance between brackets, will be cut into equal parts unless otherwise specified. Pole joiners will be supplied.

50mm (2") 38mm (11/2") 30mm (1³/16")

Diameter Recommended maximum distance between brackets ø30mm (13/16") 2100mm (83") ø38mm (1½") 2200mm (87") ø50mm (2") 2400mm (96")

83



Medium weight, lined & interlined curtains Medium to heavy weight, lined & interlined curtains Heavy weight interlined curtains

Minimum

bend radius

R255mm (10")

₽255mm (10")

₽255mm (10")

Hold back

Ombres



Internal measurement: 137mm (53/8") Fixing plate size: ø44mm (13/4")

Tie Back Hook



Projection: 29mm (11/8") Fixing plate size: w25mm (1 ″) х н74mm (2¹⁵/16 ″)



1000mm (393/8") Custom lengths available to order