CONTACT

www.bradleycollection.com














USA & CANADA

& +44 (0)1449 722 724

& +1 (310) 815 8255

√ info.us@bradleycollection.com

LONDON SHOWROOM

& +44 (0)207 871 7793



CEDIA. MEMBER Specialised fixings for mounting brackets will be required in certain situations and are not provided as standard. Steel items are not recommended for damp conditions such as shower rooms. Crystal finials should not be positioned in direct sunlight, and are not suitable for use in conservatories. Fluid Metal items are supplied unlacquered and will tarnish over time.

The Bradley Collection reserves the right to modify design and materials without prior notice as part of a process of continual product improvement. Due to printing limitations, colours in this brochure may not be accurate.

Products are protected by Design Rights, under provisions of Copyright, Designs & Patents Act 1988. Bradley®, The Bradley Collection® and ② Logo are registered Community trademarks of The Bradley Collection Ltd. in Europe and registered trademarks of the Bradley Collection, Inc. in the USA.

The Bradley Collection Ltd Lion Barn • Maitland Road • Needham Market • Suffolk • IP6 8NS • UK

Printed: 1023 • Copyright © The Bradley Collection Ltd. 2023





Innovative and exciting, Drive brings curtain poles firmly into the modern era. A full round pole style, a seamless look and a solution for any shape of window; all driven by a battery powered motor requiring no specialist skills to specify and install.

DRIVE | THE NEW STANDARD

Pictured: Round ø38mm (11/2") *Pole • Ellipse • Glimmer

4 DRIVE


HANDS FREE

A modern replacement for corded poles, Drive is simple to install with no electrician required. Affordable and modular, it is perfect for projects of any scale.



UNOBTRUSIVE

The bracket architecture is shared with Glide and Float and keeps the front face of the pole clear of visible parts.

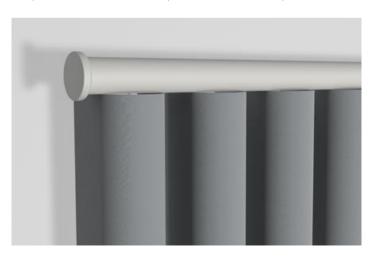


SEAMLESS INNOVATION

The motor is turned through 90 degrees and rear-mounted via an embedded motor housing, finished in a complementary colour. The motor sits neatly and discreetly behind the drapes.



PRECISE

A new jointing system ensures perfect alignment between pole sections.

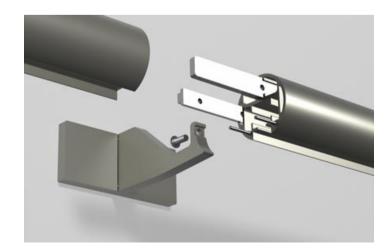

GLIDING

Gypsum & Anthracite material now offered as standard for gliders, with coated metal gliders available for an exact colour match.



FLUSH

The rear fixing brackets allow true flush ceiling mount for the first time.



MODERN

Modern sinuous heading styles can be created, using both hook and tape or snap tape components.



BENT TO SHAPE

The pole is designed to be accurately bent and curved to shape.



This stunning palette of colours and finishes is available on all Gliderpoles and components, with a choice of coat options throughout.

SHADES


A superb selection of opaque colours, all available in a choice of Matte, Satin or Gloss finish.





METALLICS

High metallic fleck coatings with most available in Satin and Gloss sheen levels.

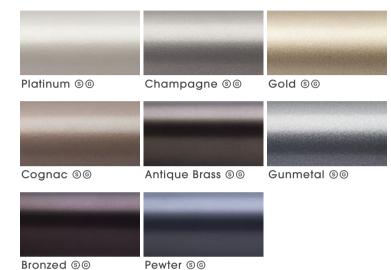

ANODIC METALS

A flat metal colour group, with an anodised style surface texture.





Tulip • Moss - Mo



FINIALS

The fused ends of Drive embody the seamless design language of the collection. Drive is presented with a Seamless end cap as standard, giving the ultimate in clean minimalism.

The fused ends also allow understated geometric finial forms to be added for a hint of decorative detail.









Oblique ø38mm (1½") Inclusive Length 23mm (1/8")

Orbic Grand

ø38mm (1½") Inclusive Length 15mm (9/16")



Drum

ø38mm (1½") Inclusive Length 23mm (7/8")

ø38mm (11/2") Inclusive Length 29mm (11/8")



ø38mm (1½") **Inclusive Length** 33mm (5/16")



ø38mm (1½") Inclusive Length 65mm (29/16")

Please note that if this option is selected finials cannot be added at a later date.

 For full technical information, sizes and weights please download the specification guide - www.bradleycollection.com/specification-guides/

SINGLE BRACKETS

Side



Diameter ø38mm (1½")

Projection from wall to pole centre 100mm (4")

Fixing plate size
w38mm (1½") x H89mm (3½")

Mid



Diameter ø38mm (1½") Projection from wall to pole centre 100mm (4")

Fixing plate size

w89mm (3½") х н38mm (1½")

Flush



Diameter ø38mm (1½") Drop from ceiling to top of pole 1mm (1/16")

Fixing plate size

w70mm (2³/₄") x **H**30mm (1³/₁₆")

DOUBLE BRACKETS

Side



Diameter

Fø38mm (1½") Bø38mm (1½")

Projection from wall to pole centre F200mm (8") B100mm (4")

Fixing plate size

w57mm (21/4") x H114mm (41/2")

Иid



Diameter

Fø38mm (1½") Bø38mm (1½")

Projection from wall to pole centre F200mm (8") B 100mm (4")

Fixing plate size

w114mm (4½") x **H**57mm (2¼")

Flush Partition



Diameter

Fø38mm (1½") Bø38mm (1½")

Drop from ceiling to top of pole 1mm (1/16")

Fixing plate size

w89mm (3½″) х **н**38mm (1½″)

RECESS BRACKETS

Recess
with hook stop

Diameter ø38mm (1½") Depth off wall

Fixing plate size ø48mm (17/16")



CUSTOM BRACKETS

A bespoke design service is offered to ensure solutions in even the most challenging installations.



Custom Projection

Specify the exact projection needed.



Custom Fixing Plate

Relevant where space is restricted or weight is a concern.



Upl

Helps negotiate cornice and similar architectural features.



Ceiling Brackets

Specify exact projection required from ceiling.



Angled Brackets

The solution for tight and awkward locations.

SYSTEMS

Electric double pole systems may be specified with a **DRIVE** pole to front and rear.

It is also possible to specify a motor to the main curtain and a manual pole to the rear. Simply select **DRIVE** for the front pole and either **GLIDE** Ø30mm ($1^3/_{16}$ ") or 38mm ($1^1/_2$ ") for the rear.



4 DRIVE

Straight poles maximum length 6 Metres (19ft) Bespoke bay service Standard and Metalcoat gliders and Sine gliders Standard roller, Ripple rollers and Ripplefold® rollers Battery powered motor

Touch and go manual operation System allows manual operation during power failure Quiet motors, noise level at 1000mm (3') <44dBA Wireless remote control & app control options

MOTOR

Battery Operated Motor



A battery powered motor, with integrated radio receiver for use with dedicated remote control. Control by smartphone app available. Single charge lasts three to four months in normal use. Requires no pre-wiring or specialist installation. Suitable for systems up to 6m (19ft)

We reserve the right to supply an alternative motor and control of equivalent quality to that shown, depending on stock availability.

CONTROL OPTIONS

Remote Control



Multi-channel hand held remote control available

App Control



The system may be controlled through smart devices via a hub and app. Compatible with Amazon Alexa.

GLIDING OPTIONS



Drop from bottom of track: 15mm (5/8")

Colour Options: Gypsum • Anthracite Drop from bottom of track: 15mm (5/8") **Colour Options:**

System Colour 9 • Brushed Nickel

Drop from bottom of track: 15mm (5/8")

Colour Options: White

Sine Glider Metalcoat Sine Glider® Ripple Roller Ripplefold Roller

Drop from bottom of track:

15mm (5/8") Sine Pitch: 80mm (31/8")

Colour Options:

Gypsum • Anthracite

Drop from bottom of track: 15mm (5/8")

Sine Pitch: 80mm (31/8") Colour Options:

System Colour 9 • Brushed Nickel

Drop from bottom of track: 15mm (5/8")

Ripple Pitch: 80mm (31/8")

Colour Options: White

Drop from bottom of track: 15mm (5/8")

Ripplefold® Fullness: 80% • 100% • 120% **Colour Options:**

White

(9) Metalcoat Gliders, supplied in satin finish on Matte & Gloss finished systems

POLES

Poles are cut, bent and curved to suit individual requirements. When calculating the length of your pole, remember to allow tolerance beyond the width of the frame for the curtains to stack back to the edge of the window.

Maximum pole length in one piece 4.0m (157"). ⊕

Poles exceeding the maximum length will be cut into equal parts unless otherwise specified. A pole joiner will be supplied.



Diameter ø38mm (11/2") Maximum distance between brackets 1000mm (39")