

CONTACT

www.bradleycollection.com



UK & REST OF THE WORLD

☎ +44 (0)1449 722 724

✉ info@bradleycollection.com

USA & CANADA

☎ +1 (310) 815 8255

✉ info.us@bradleycollection.com

LONDON SHOWROOM

☎ +44 (0)207 871 7793

✉ showroom@studiotwochelsea.com



⚡ | DRIVE

THE **BRADLEY**
COLLECTION

CEDIA
MEMBER

Specialised fixings for mounting brackets will be required in certain situations and are not provided as standard.
Steel items are not recommended for damp conditions such as shower rooms.
Crystal finials should not be positioned in direct sunlight, and are not suitable for use in conservatories.
Fluid Metal items are supplied unlacquered and will tarnish over time.

The Bradley Collection reserves the right to modify design and materials without prior notice as part of a process of continual product improvement. Due to printing limitations, colours in this brochure may not be accurate.

Products are protected by Design Rights, under provisions of Copyright, Designs & Patents Act 1988.
Bradley®, The Bradley Collection® and  Logo are registered Community trademarks of The Bradley Collection Ltd. in Europe and registered trademarks of the Bradley Collection, Inc. in the USA.

The Bradley Collection Ltd Lion Barn • Maitland Road • Needham Market • Suffolk • IP6 8NS • UK

Printed: 1023 • Copyright © The Bradley Collection Ltd. 2023



⚡ | DRIVE

Innovative and exciting, Drive brings curtain poles firmly into the modern era. A full round pole style, a seamless look and a solution for any shape of window; all driven by a battery powered motor requiring no specialist skills to specify and install.

DRIVE | THE NEW STANDARD

Pictured: Round ø38mm (1½") ⚡Pole • Ellipse • Glimmer

HANDS FREE

A modern replacement for corded poles, Drive is simple to install with no electrician required. Affordable and modular, it is perfect for projects of any scale.



SEAMLESS INNOVATION

The motor is turned through 90 degrees and rear-mounted via an embedded motor housing, finished in a complementary colour. The motor sits neatly and discreetly behind the drapes.




GLIDING

Gypsum & Anthracite material now offered as standard for gliders, with coated metal gliders available for an exact colour match.



MODERN

Modern sinuous heading styles can be created, using both hook and tape or snap tape components.

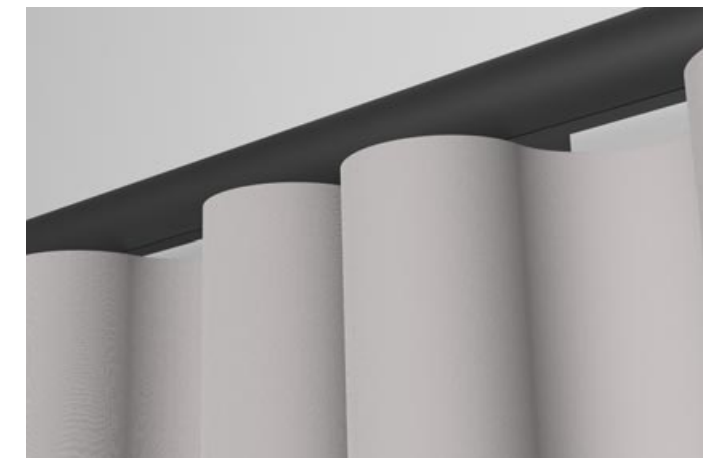


UNOBTRUSIVE

The bracket architecture is shared with Glide and Float and keeps the front face of the pole clear of visible parts.



PRECISE

A new jointing system ensures perfect alignment between pole sections.

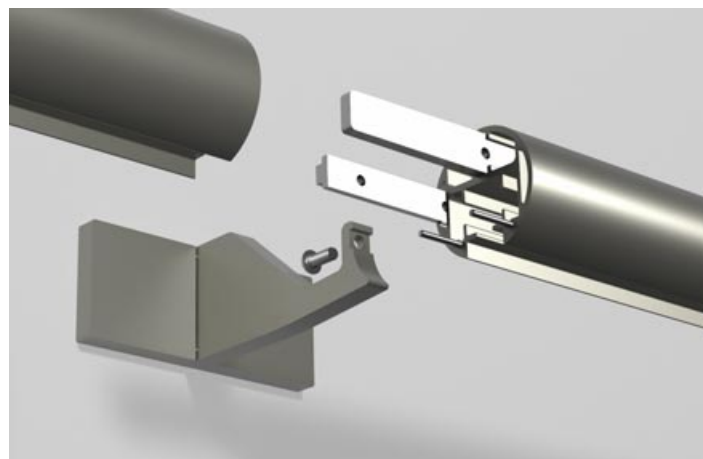

FLUSH

The rear fixing brackets allow true flush ceiling mount for the first time.



BENT TO SHAPE

The pole is designed to be accurately bent and curved to shape.



FINISHES

This stunning palette of colours and finishes is available on all Gliderpoles and components, with a choice of coat options throughout.

SHADES

A superb selection of opaque colours, all available in a choice of Matte, Satin or Gloss finish.



COAT OPTIONS



METALLICS

High metallic fleck coatings with most available in Satin and Gloss sheen levels.



ANODIC METALS

A flat metal colour group, with an anodised style surface texture.



Pictured left to right:
 ø38mm (1½") Pole | Spheric • Charcoal - Matte | Orbic
 Grand • Stone - Matte | Seamless • Lead - Matte
 Tulip • Moss - Matte | Planar • Earth - Matte



Pictured:
 ø38mm (1½") ↗ Pole • Seamless • Charcoal - Satin

FINIALS




The fused ends of Drive embody the seamless design language of the collection. Drive is presented with a Seamless end cap as standard, giving the ultimate in clean minimalism.

The fused ends also allow understated geometric finial forms to be added for a hint of decorative detail.






© Please note that if this option is selected finials cannot be added at a later date.
 For full technical information, sizes and weights please download the specification guide - www.bradleycollection.com/specification-guides/


SINGLE BRACKETS

Side 	Diameter ø38mm (1½")	Projection from wall to pole centre 100mm (4")	Fixing plate size w38mm (1½") x h89mm (3½")
Mid 	Diameter ø38mm (1½")	Projection from wall to pole centre 100mm (4")	Fixing plate size w89mm (3½") x h38mm (1½")
Flush 	Diameter ø38mm (1½")	Drop from ceiling to top of pole 1mm (1/16")	Fixing plate size w70mm (2¾") x h30mm (1¾")

DOUBLE BRACKETS






Side 	Diameter Fø38mm (1½") Bø38mm (1½")	Projection from wall to pole centre F200mm (8") B100mm (4")	Fixing plate size w57mm (2¼") x h114mm (4½")
Mid 	Diameter Fø38mm (1½") Bø38mm (1½")	Projection from wall to pole centre F200mm (8") B100mm (4")	Fixing plate size w114mm (4½") x h57mm (2¼")
Flush Partition 	Diameter Fø38mm (1½") Bø38mm (1½")	Drop from ceiling to top of pole 1mm (1/16")	Fixing plate size w89mm (3½") x h38mm (1½")

RECESS BRACKETS

Recess with hook stop 	Diameter ø38mm (1½")	Depth off wall 10mm (3/8")	Fixing plate size ø48mm (17/16")
---	--------------------------------	--------------------------------------	--

CUSTOM BRACKETS

A bespoke design service is offered to ensure solutions in even the most challenging installations.

				
Custom Projection Specify the exact projection needed.	Custom Fixing Plate Relevant where space is restricted or weight is a concern.	Uplift Helps negotiate cornice and similar architectural features.	Ceiling Brackets Specify exact projection required from ceiling.	Angled Brackets The solution for tight and awkward locations.

SYSTEMS

Electric double pole systems may be specified with a **DRIVE** pole to front and rear.

It is also possible to specify a motor to the main curtain and a manual pole to the rear. Simply select **DRIVE** for the front pole and either **GLIDE** Ø30mm (1¾") or 38mm (1½") for the rear.



⚡ | DRIVE

Straight poles maximum length 6 Metres (19ft) ☺
 Bespoke bay service
 Standard and Metalcoat gliders and Sine gliders
 Standard roller, Ripple rollers and Ripplefold® rollers
 Battery powered motor

Touch and go manual operation
 System allows manual operation during power failure
 Quiet motors, noise level at 1000mm (3') <44dBA
 Wireless remote control & app control options

MOTOR

🔋 Battery Operated Motor



A battery powered motor, with integrated radio receiver for use with dedicated remote control. Control by smartphone app available. Single charge lasts three to four months in normal use. Requires no pre-wiring or specialist installation. Suitable for systems up to 6m (19ft)

We reserve the right to supply an alternative motor and control of equivalent quality to that shown, depending on stock availability.

CONTROL OPTIONS

Remote Control



Multi-channel hand held remote control available.

App Control



The system may be controlled through smart devices via a hub and app. Compatible with Amazon Alexa.

🔋 Battery Powered | ☺ Supplied in sections - Section lengths over 3.0m (118") will incur a handling charge
 Weight restrictions apply. For full technical information please refer to the specification guide. www.bradleycollection.com/specification-guides/

GLIDING OPTIONS



Glider
 Drop from bottom of track:
 15mm (5/8")

Colour Options:
 Gypsum • Anthracite



Metalcoat Glider®
 Drop from bottom of track:
 15mm (5/8")

Colour Options:
 System Colour ☺ • Brushed Nickel



Roller
 Drop from bottom of track:
 15mm (5/8")

Colour Options:
 White

Sine Glider



Sine Glider
 Drop from bottom of track:
 15mm (5/8")

Sine Pitch:
 80mm (3 1/8")

Colour Options:
 Gypsum • Anthracite

Metalcoat Sine Glider®



Metalcoat Sine Glider®
 Drop from bottom of track:
 15mm (5/8")

Sine Pitch:
 80mm (3 1/8")

Colour Options:
 System Colour ☺ • Brushed Nickel

Ripple Roller



Ripple Roller
 Drop from bottom of track:
 15mm (5/8")

Ripple Pitch:
 80mm (3 1/8")

Colour Options:
 White

Ripplefold Roller



Ripplefold Roller
 Drop from bottom of track:
 15mm (5/8")

Ripplefold® Fullness:
 80% • 100% • 120%

Colour Options:
 White


☺ Metalcoat Gliders, supplied in satin finish on Matte & Gloss finished systems

POLES

Poles are cut, bent and curved to suit individual requirements. When calculating the length of your pole, remember to allow tolerance beyond the width of the frame for the curtains to stack back to the edge of the window.

Maximum pole length in one piece 4.0m (157") ☺

Poles exceeding the maximum length will be cut into equal parts unless otherwise specified. A pole joiner will be supplied.



Diameter

ø38mm (1 1/2")

Maximum distance between brackets

1000mm (39")

For full technical information, sizes and weights please download the specification guide - www.bradleycollection.com/specification-guides/