

CONTACT

www.bradleycollection.com



UK & REST OF THE WORLD

+44 (0)1449 722 724

info@bradleycollection.com

USA & CANADA

+1 (310) 815 8255

info.us@bradleycollection.com

LONDON SHOWROOM

+44 (0)207 871 7793

showroom@studiotwochelsea.com

THE **BRADLEY**
COLLECTION

CEDIA
MEMBER

Specialised fixings for mounting brackets will be required in certain situations and are not provided as standard.
Steel items are not recommended for damp conditions such as shower rooms.
Crystal finials should not be positioned in direct sunlight, and are not suitable for use in conservatories.
Fluid Metal items are supplied unlacquered and will tarnish over time.

The Bradley Collection reserves the right to modify design and materials without prior notice as part of a process of continual product improvement. Due to printing limitations, colours in this brochure may not be accurate.

Products are protected by Design Rights, under provisions of Copyright, Designs & Patents Act 1988.
Bradley®, The Bradley Collection® and  Logo are registered Community trademarks of The Bradley Collection Ltd. in Europe and registered trademarks of the Bradley Collection, Inc. in the USA.

The Bradley Collection Ltd Lion Barn • Maitland Road • Needham Market • Suffolk • IP6 8NS • UK

Printed: 1023 • Copyright © The Bradley Collection Ltd. 2023

9 | THE **BRADLEY**
COLLECTION

⚡ | ECLIPSE



⚡ | ECLIPSE

Peerless and opulent, this collection truly has no rival.

A rare, luxurious aesthetic and freedom of expression in design are balanced with the final word in functionality and control.

The world's finest.

Pictured: ø38mm (1½") Coverpole - Lutron • Standard Stud • Brass Toned
Project by: Gallagher London • London SW7 - UK

LEADING MOTOR OPTIONS

Eclipse may be specified with your choice from the leading motorised systems. This provides power and control options ranging from standalone battery powered systems to fully integrated home automation solutions.




For Double pole systems, a hand drawn rear pole may be specified if preferred.



SCALE

Eclipse poles are available in two pole diameters, Ø38mm (1½") • 50mm (2"). Finial designs are carefully scaled to maintain the system aesthetic.

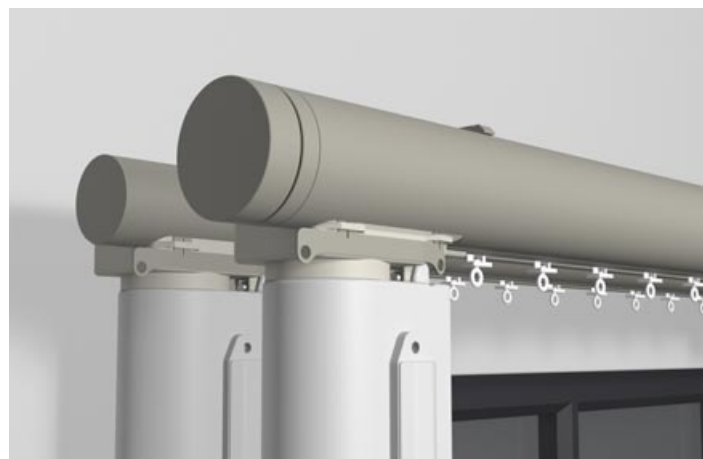

DETAILING

The secret of any design is in the detail. Nylon end housings are finished in a complementary colour, for a harmonious tonal effect.




LENGTH

Poles can be supplied to any length[Ⓢ], subject to maximum weight loadings of the selected motorised system.



BENT TO SHAPE

A bespoke bay bending service is available on all diameters to allow the perfect shaped pole to fit any bay window.[Ⓢ]

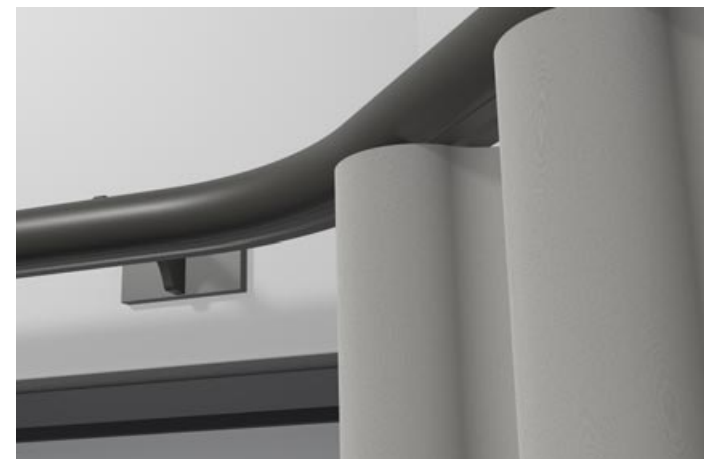

FUNCTION


A range of bracket options have been designed to ensure simple installation, including flush fit ceiling brackets.



MODERN HEADINGS

The choice of motor systems means that modern headings can be accommodated, with both Wave[®] and Ripplefold[®] styles available.



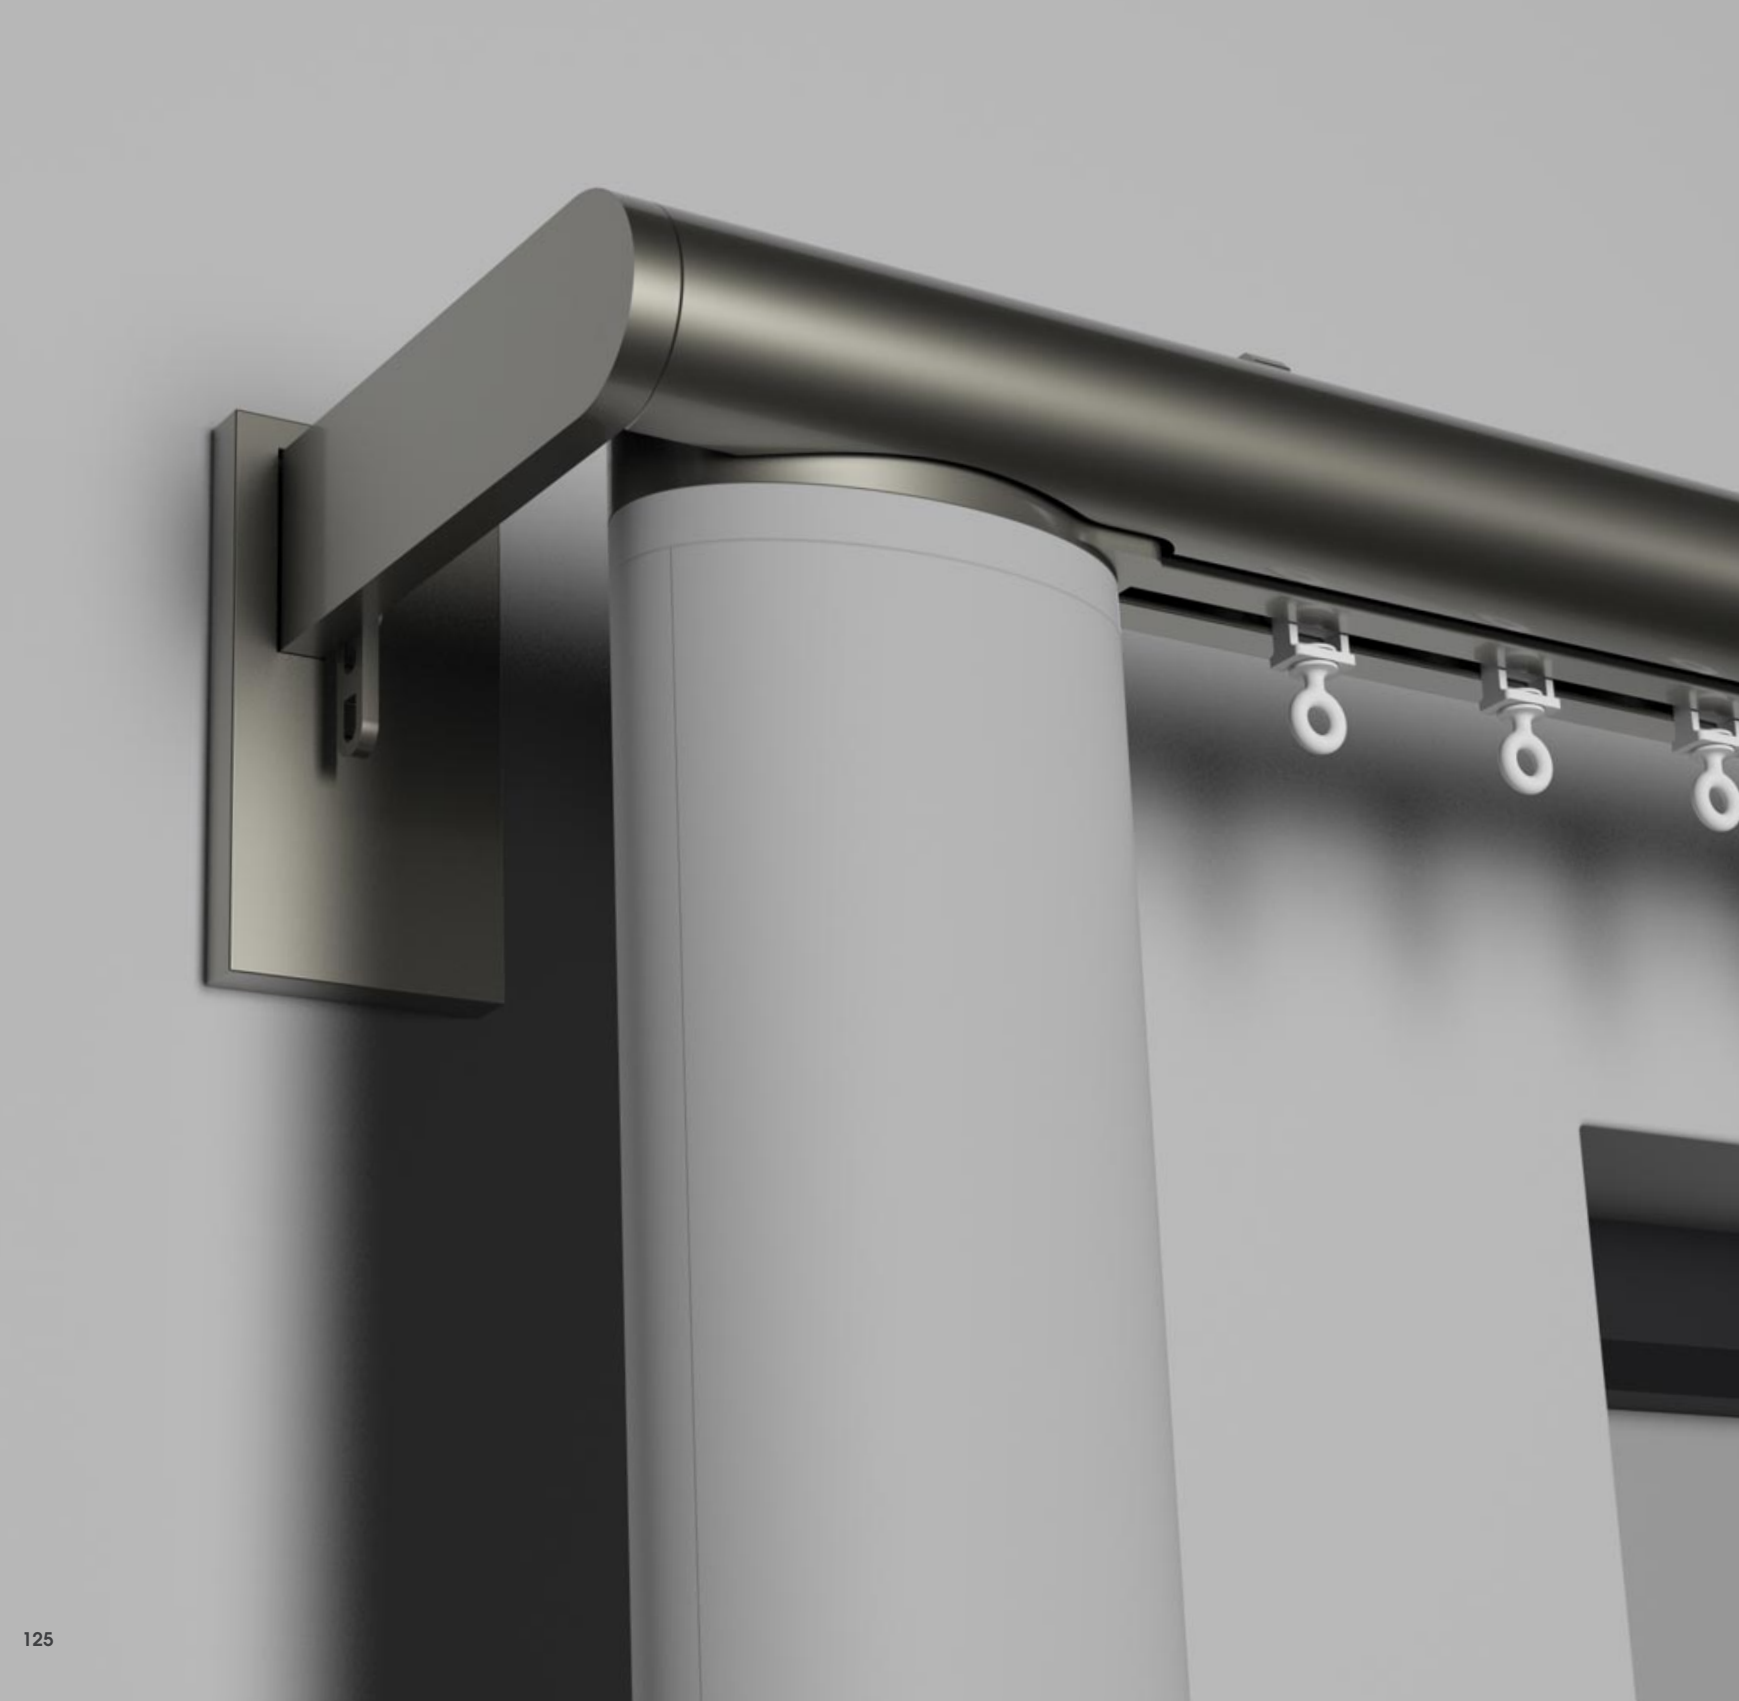


⚡ | ECLIPSE

EDGE

Edge is the epitome of understatement, being sleek, discreet and integrated. Available in two pole diameters, Ø38mm (1½") • 50mm (2").

The unique Edge bracket design gives a structured return to the wall for drapes and incorporates an adjustable return-to-wall hook eye.

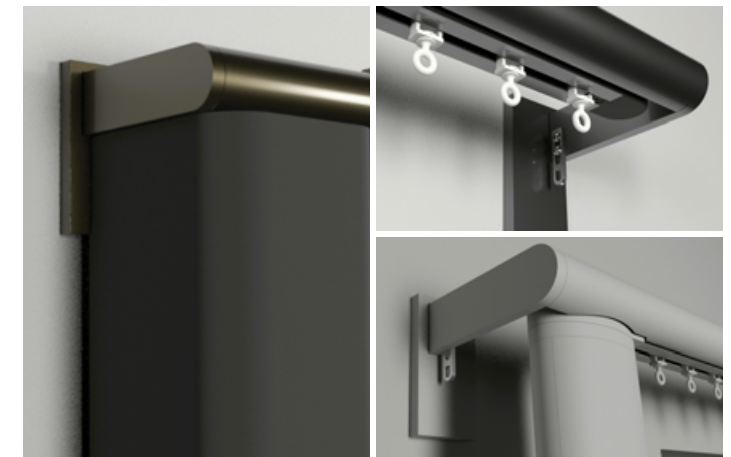

FINISHES

All poles and components may be specified in this stunning palette of colours and finishes, with a choice of coat options throughout.

SHADES

A superb selection of opaque colours, all available in a choice of Matte, Satin or Gloss finish.

COAT OPTIONS

Matte

Satin

Gloss

Cloud	Alabaster	Bone	Barley	Dusk	Ceramic
Cream	Mineral	Dove	Parchment	Oatmeal	Millstone
Stone	Clay	Grey Moss	Slate	Cocoa	Moss
Damson	Smoke	Frame Grey	Lead	Earth	Burnt Ash
Flint	Charcoal	Raven			

METALLICS

High metallic fleck coatings with most available in Satin and Gloss sheen levels.

Platinum	Champagne	Gold
Cognac	Antique Brass	Gunmetal
Bronzed	Pewter	

ANODIC METALS

A flat metal colour group, with an anodised style surface texture.

Twilight	Glow	Sky
Sunrise	Storm	Glimmer
Sunset	Night Sky	Midnight

STAINLESS STEEL

A brushed stainless steel base gives an edgy feel.

Brushed Stainless

CLASSICS

Signature translucent finishes which allow the beauty of steel to shine through.

Polished	Natural Steel
Brass Toned	Matte Brass Toned
Oil Rubbed	Waxed




Pictured: ø38mm (1½”) Coverpole - Somfy • Contrast Stud • Light Bronze

SPECIALIST FINISHES

Specialist techniques are employed to deliver additional finish choices. These more complex finishes are available at a premium cost and with longer lead times.

STAINLESS TINTS


Brushed stainless steel, in subtle tinted hues gives an industrial aesthetic.

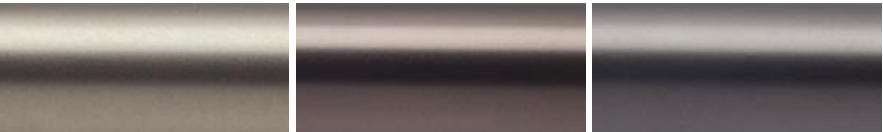

Brushed Brass ⊕⊕⊗ Brushed Bronze ⊕⊕⊗ Brushed Carbon ⊕⊕⊗

FLUID METAL™

Leading edge technology allows authentic metal coats to be applied to any substrate, which can then be worked and aged for a truly luxurious result.

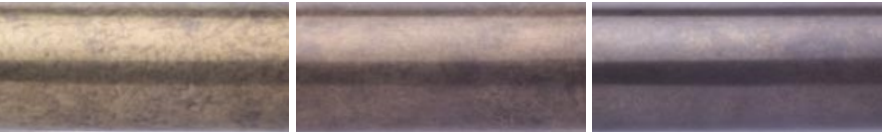

Old Brass ⊕⊕⊗👤 Light Bronze ⊕⊕⊗👤 Bronze Art ⊕⊕⊗👤

⊕ A finishing charge will apply | ⊕ Longer lead-times will apply | ⊗ Fluid Metal finishes are supplied unlacquered and will tarnish over time, a clear lacquer may be applied on request as a custom finish
👤 Fluid Metal finishes are hand produced, finish may vary | ⊗ Brushed finishes not available with bends

FINIALS

This design edit provides a solution for any project. Sharp, geometric designs give Eclipse a thoroughly modern persona, while rounded design cues offer a more classic feel, albeit still expressed with a more contemporary hand.

Pictured: ø38mm (1½”) Coverpole - Silent Gliss • Faceted Disc • Brushed Stainless



Flush End Cap [●] Supplied as standard
ø38mm (1½”) Inclusive Length 6mm (¼”)
ø50mm (2”) Inclusive Length 6mm (¼”)



Contrast Stud
ø38mm (1½”) Inclusive Length 20mm (¾”)
ø50mm (2”) Inclusive Length 23mm (7⁄8”)



Standard Stud
ø38mm (1½”) Inclusive Length 9mm (3⁄8”)
ø50mm (2”) Inclusive Length 10mm (3⁄8”)



Large Disc
ø38mm (1½”) Inclusive Length 7mm (¼”)
ø50mm (2”) Inclusive Length 8mm (5⁄16”)



Button Stud
ø38mm (1½”) Inclusive Length 58mm (25⁄16”)
ø50mm (2”) Inclusive Length 69mm (211⁄16”)



Faceted Disc
ø38mm (1½”) Inclusive Length 45mm (1¾”)
ø50mm (2”) Inclusive Length 59mm (25⁄16”)








Ball & Collar
ø38mm (1½”) Inclusive Length 86mm (33⁄8”)
ø50mm (2”) Inclusive Length 106mm (43⁄16”)






Ball
ø38mm (1½”) Inclusive Length 86mm (33⁄8”)
ø50mm (2”) Inclusive Length 106mm (43⁄16”)

● Please note that if this option is selected finials cannot be added at a later date.
For full technical information, sizes and weights please download the specification guide - www.bradleycollection.com/specification-guides/



SINGLE BRACKETS

Side		Diameter	Projection from wall to track centre	Fixing plate size
		ø38mm (1½")	100mm (4")	w52mm (2⅛") x H104mm (4⅞")
		ø50mm (2")	100mm (4")	w52mm (2⅛") x H104mm (4⅞")
Mid	Mid - Joining	Diameter	Projection from wall to track centre	Fixing plate size
		ø38mm (1½")	100mm (4")	w104mm (4⅞") x H52mm (2⅛")
		ø50mm (2")	100mm (4")	w104mm (4⅞") x H52mm (2⅛")
Flush	Flush - Joining	Diameter	Drop from ceiling to top of pole	Fixing plate size
		ø38mm (1½")	3mm (⅛")	w70mm (2¾") x H34mm (1⅝")
		ø50mm (2")	3mm (⅛")	w70mm (2¾") x H34mm (1⅝")

DOUBLE BRACKETS


Side		Diameter	Projection from wall to track centre	Fixing plate size
		Fø38mm (1½") Bø38mm (1½")	F160mm (6⅝") B60mm (2⅜")	w52mm (2⅛") x H104mm (4⅞")
		Fø38mm (1½") B Uncovered track	F160mm (6⅝") B60mm (2⅜")	w52mm (2⅛") x H104mm (4⅞")
		Fø50mm (2") Bø38mm (1½")	F160mm (6⅝") B60mm (2⅜")	w52mm (2⅛") x H104mm (4⅞")
		Fø50mm (2") Bø50mm (2")	F160mm (6⅝") B60mm (2⅜")	w52mm (2⅛") x H104mm (4⅞")
		Fø50mm (2") B Uncovered track	F160mm (6⅝") B60mm (2⅜")	w52mm (2⅛") x H104mm (4⅞")
Mid	Mid - Joining	Diameter	Projection from wall to track centre	Fixing plate size
		Fø38mm (1½") Bø38mm (1½")	F160mm (6⅝") B60mm (2⅜")	w104mm (4⅞") x H52mm (2⅛")
		Fø38mm (1½") B Uncovered track	F160mm (6⅝") B60mm (2⅜")	w104mm (4⅞") x H52mm (2⅛")
		Fø50mm (2") Bø38mm (1½")	F160mm (6⅝") B60mm (2⅜")	w104mm (4⅞") x H52mm (2⅛")
		Fø50mm (2") Bø50mm (2")	F160mm (6⅝") B60mm (2⅜")	w104mm (4⅞") x H52mm (2⅛")
		Fø50mm (2") B Uncovered track	F160mm (6⅝") B60mm (2⅜")	w104mm (4⅞") x H52mm (2⅛")

EDGE BRACKETS

Single - End	Diameter	Projection from wall to pole centre	Fixing plate size
	ø38mm (1½")	100mm (4")	w52mm (2⅛") x H104mm (4⅞")
	ø50mm (2")	100mm (4")	w52mm (2⅛") x H104mm (4⅞")
Double - End	Diameter	Projection from wall to pole centre	Fixing plate size
	Fø38mm (1½") Bø38mm (1½")	F160mm (6⅝") B60mm (2⅜")	w52mm (2⅛") x H104mm (4⅞")
	Fø50mm (2") Bø38mm (1½")	F160mm (6⅝") B60mm (2⅜")	w52mm (2⅛") x H104mm (4⅞")
	Fø50mm (2") Bø50mm (2")	F160mm (6⅝") B60mm (2⅜")	w52mm (2⅛") x H104mm (4⅞")

CUSTOM BRACKETS

Eclipse can be customised to suit virtually any window.

				
Custom Projection	Custom Fixing Plate	Uplift	Dropdown Ceiling	Angled Brackets
Specify the exact projection needed.	Relevant where space is restricted or weight is a concern.	Helps negotiate cornice and similar architectural features.	Specify exact projection required from ceiling.	The solution for tight and awkward locations.

ELECTRIC DRAPERY HARDWARE

For the full range of Electric poles and tracks visit www.bradleycollection.com/electric


Handed Item - Left and Right version available

Straight poles maximum length 9 Metres (29.5ft)Ⓢ
Bespoke bay serviceⓈ
Standard rollers and Ripplefold® rollers
Low voltage concealed motors
Three motor ratings for differing curtain weights

Quiet motors, noise level at 1000mm (3') <44dBA
Fully compatible with Lutron® QS Home Automation systems
Wireless remote control, app control or home automation integration


MOTOR OPTIONS

⚡ Motor



D105 • D145 • D175
Mains powered motor options.
Requires professional installation.
Suitable for systems up to 15M (49ft).

⚡ Motor
with radio dongle



D105 • D145 • D175
Mains powered motor options , with radio
dongle for use with remote control options.
Requires professional installation.
Suitable for systems up to 15M (49ft).

CONTROL OPTIONS

Remote Control



Single hand held remote control option available.

App Control
RA2 Select Hub



The system can be controlled with the Lutron app or through smart devices & Amazon Alexa.

Automation systems

Control4



KNX



LUTRON



CRESTRON




The system can also be intergrated with all major home control systems.Ⓢ

GLIDING OPTIONS


Lutron can be supplied with 2 gliding options: Standard Rollers, or Ripplefold® Rollers to be used with Graber or Kirsch snap header tape.

Rollers



Drop from bottom of track:
12mm (7/16")

Ripplefold® Rollers



Drop from bottom of track:
20mm (13/16")
Ripplefold® Fullness:
80% • 100% • 120%

POLES

Poles are cut and bent to suit individual requirements. When calculating the length of your pole, remember to allow tolerance beyond the width of the frame for the curtains to stack back to the edge of the window.

Maximum Coverpole length in one piece 2.9m (114")Ⓢ. Poles exceeding the maximum length will be cut into equal parts unless otherwise specified. A joining bracket will need to be specified.

Size

ø38mm (1½")
ø50mm

Maximum distance between brackets

1500mm (60")
1500mm (60")

Minimum bend radius

Ⓡ275mm (10¹³/₁₆")
Ⓡ275mm (10¹³/₁₆")

SOMFY®





GLYDEA, IRISMO & MOVELITE



Straight poles maximum length 12 Metres (39ft)Ⓢ
Bespoke bay serviceⓈⓈ
Standard rollers, Ripple rollers and Ripplefold® rollers
Mains & Battery powered motor options
Touch and go manual operation

System allows manual operation during power failure
Quiet motors, noise level at 1000mm (3') <44dBA
Fully compatible with Somfy RTS
Wireless remote control, app control or home automation integration

MOTOR OPTIONS




 ⚡ Glydea Ultra 60e	 🔋 Irisimo 45 WF	 ⚡ Movelite 35	 🔋 Movelite 35 WF
WT • DCT • RTS Mains powered motor. RTS includes integrated radio receiver for use with remote control options. Requires professional installation. Suitable for systems up to 12M (39ft).	RTS Battery powered motor, with integrated radio receiver for use with remote control options. Single charge lasts up to six months. Requires no pre-wiring. Suitable for systems up to 10M (33ft).	WT • DCT • RTS Mains powered motor. RTS includes integrated radio receiver for use with remote control options. Requires professional installation. Suitable for systems up to 10M (33ft).	RTS Battery powered motor, with integrated radio receiver for use with remote control options. Single charge lasts up to four months. Requires no pre-wiring. Suitable for systems up to 6M (19ft)Ⓢ.

CONTROL OPTIONS

Remote Control  Single channel & Multi-channel hand held remote control options available.	App Control Tahoma  The system can be controlled with the Somfy Tahoma app or through smart devices & Amazon Alexa.	Automation systems <div></div> The system can also be intergrated with all major home control systems.Ⓢ
--	---	--

GLIDING OPTIONS

Somfy is available in 3 gliding options: Standard Rollers, Ripple Rollers, to be used with wave-style header tape. Or Ripplefold® Rollers to be used with Graber or Kirsch snap header tape.

Rollers	Ripple Rollers	Ripplefold® Rollers
		
Drop from bottom of track: 20mm (13/16")	Drop from bottom of track: 20mm (13/16") Ripple Pitch: 80mm (31/8")	Drop from bottom of track: 20mm (13/16") Ripplefold® Fullness: 80% • 100% • 120%

POLES

Poles are cut and bent to suit individual requirements. When calculating the length of your pole, remember to allow tolerance beyond the width of the frame for the curtains to stack back to the edge of the window.

Maximum Coverpole length in one piece 2.9m (114")Ⓢ. Poles exceeding the maximum length will be cut into equal parts unless otherwise specified. A joining bracket will need to be specified.

		
Size ø38mm (1½") ø50mm	Maximum distance between brackets 1500mm (60") 1500mm (60")	Minimum bend radius R275mm (10¹³/₁₆") R275mm (10¹³/₁₆")

⚡ Mains Power | 🔋 Battery Power | Ⓢ Movelite35 WF is not suitable for bay bends | Ⓢ Specialist support & additional components required
Weight restrictions apply. For full technical information please refer to the specification guide. www.bradleycollection.com/specification-guides/

Ⓢ Supplied in sections - maximum section length 2.9m (9.5ft) | Ⓢ Brushed finishes not available with bends

SILENT GLISS® 5600

Straight poles maximum length 15 Metres (49ft)Ⓢ
Bespoke bay serviceⓈ
Standard gliders and rollers & Wave® gliders and rollers
DC & AC hidden motor options

Touch and go manual operation
System allows manual operation during power failure
Quiet motors, noise level at 300mm (1') <36dBA
Wireless remote control, app control or home automation integration



MOTOR OPTIONS

⚡ 9060 Motor



Mains powered motor option.
Requires professional installation.
Suitable for systems up to 15M (49ft).
Three colour options: White • Silver • Black

⚡ 9060 Motor with radio module



Mains powered motor, with radio module for use with remote control options.
Requires professional installation.
Suitable for systems up to 15M (49ft).
Three colour options: White • Silver • Black
Smart Expansion ModuleⓈ also available.

CONTROL OPTIONS

Remote Control



Single & Multi-channel hand held remote control options available.

App Control Smart



The system can be controlled with the Silent Gliss SmartⓈ system allowing two way integration with all major home control systems

Automation systems



The system can also be intergrated with all major home control systems.Ⓢ

GLIDING OPTIONS

Silent Gliss 5600 is available in 4 gliding options: Standard Gliders & Rollers, or Wave® Gliders & Rollers to be used with Wave® header tape.

Gliders	2C Rollers®	Wave® Gliders	Wave® 2C Rollers®
Drop from bottom of track: 20mm (13/16") Colour Options: White	Drop from bottom of track: 20mm (13/16") Colour Options: White • Black	Drop from bottom of track: 20mm (13/16") Wave® Pitch: 80mm (31/8")	Drop from bottom of track: 20mm (13/16") Wave® Pitch: 80mm (31/8") Colour Options: White • Black

POLES

Poles are cut and bent to suit individual requirements. When calculating the length of your pole, remember to allow tolerance beyond the width of the frame for the curtains to stack back to the edge of the window.

Maximum Coverpole length in one piece 2.9m (114")Ⓢ. Poles exceeding the maximum length will be cut into equal parts unless otherwise specified. A joining bracket will need to be specified.

Size ø38mm (11/2") ø50mm	Maximum distance between brackets 1500mm (60") 1500mm (60")	Minimum bend radius R275mm (1013/16") R275mm (1013/16")

Ⓢ Supplied in sections - maximum section length 2.9m (9.5ft) | Ⓢ Brushed finishes not available with bends
Ⓢ Supplied as standard on systems over 2.9m (9.5ft) with single stack curtains

⚡ Mains Power | Ⓢ Smart only available in United Kingdom, requires Smart Expansion Module | Ⓢ Specialist support & additional components required | Weight restrictions apply. For full technical information please refer to the specification guide. www.bradleycollection.com/specification-guides/