

# GLIDERPOLE<sup>®</sup>

THE **BRADLEY**  
COLLECTION

 **SilentGliss**

WAVE CURTAIN MAKEUP GUIDE

## WAVE CURTAIN MAKEUP GUIDE

Many workrooms will have their own method of manufacturing Wave curtains. This guide is intended to give you a suggested make up method so you get the best from the Silent Gliss Wave system.

When using your own fabrics we suggest that sample curtains are made to determine whether;

- A** It is suitable for use with Wave,
- B** If so, which size of Wave is most appropriate.

In general, stiffer fabrics tend not to lend themselves to Wave since they struggle to hold the soft curves. For the drop of the curtain.

Once you have confirmed your fabric is suitable for Wave you may want to consider using lead weight tape and curtain side weights for an improved finished appearance.

The maximum weight that the Wave heading tape can carry with glider cord is 2.5kg per metre of track. Wave with roller cord has much higher weight limitations. However, individual track weight restrictions still apply. (for corded systems please refer to the relevant specification guide.)

This guide is based on using the recommended Wave component parts.

**Introduction** Page 2

**Fabrics** Page 3

**Essential Parts** Page 4

**Glider & Roller Spacing** Page 5-6

**Glider & Roller Calculator** Page 7-8

**Header Tape** Page 9

**Making Wave Curtains** Page 10-11

Wave curtains will work with one of the following Gliderpole® options

### HAND DRAWN



### CORDED



There is no standard test that will indicate whether a fabric is suitable for Wave. However, experience suggests it is normally suitable for


✓ Voiles • Lined cotton • Interlined Silk • Blackout lining

The soft curves of Wave do not lend themselves to:


✗ Stiff fabrics • Heavy embroidery • Irregular vertical stripes • Metallic threads

We recommend a simple test to indicate whether Wave will be suitable (see image right). Hold the top of the fabric in this Way and see if the curtain follows a soft wave pattern without too much effort. Even Wave curtains will require some dressing and training. The extent of this will depend on the flexibility of the weave of the fabric chosen.



✓ SUITABLE FABRIC

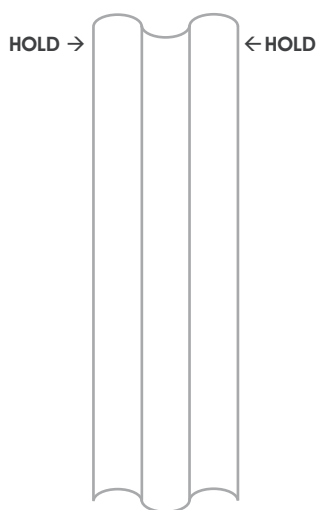


✗ UNSUITABLE FABRIC

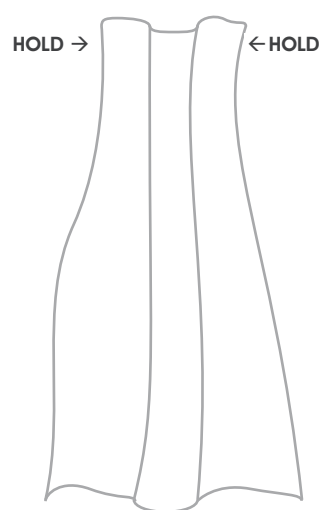

GLIDER CORD  
80mm (3 1/8") (Supplied as standard)  
60mm (2 3/8") (Optional)

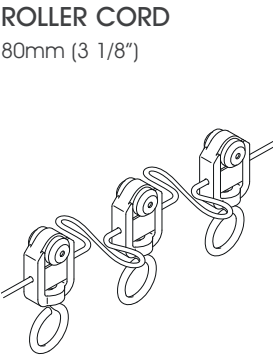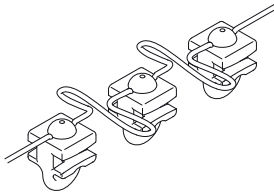


WAVE CURTAIN  
HEADING TAPE




CURTAIN  
HOOKS




WAVE CURTAIN  
IRON ON TAPE

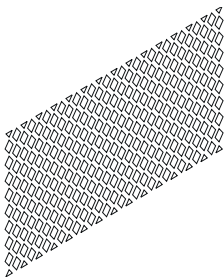


CURTAIN WEIGHT CORD  
(Optional)



WAVE DRAW ROD  
CARRIER  
(Optional)




ADJUSTABLE BRAKE  
(Optional)





WAVE® GLIDERS  
60mm (2 3⁄8") spacing between the gliders.  
80mm (3 1⁄8") spacing between the gliders. (Standard)

Glider-Cord Spacing	Curtain Hook Spacing	Approx. Curtain Fullness	Stack Depth per 1M (39 3⁄8") of pole	Min Bracket Projection
60mm (2 3⁄8")	120mm (4 3⁄4")	2.3	230mm (9 1⁄16")	100mm (4")
80mm (3 1⁄8")	160mm (6 5⁄16")	2.3	180mm (7 1⁄16")	100mm (4")



WAVE® ROLLERS  
80mm (3 1⁄8") spacing between the rollers


Roller-Cord Spacing	Curtain Hook Spacing	Approx. Curtain Fullness	Stack Depth per 1M (39 3⁄8") of pole	Min Bracket Projection
80mm (3 1⁄8")	160mm (6 5⁄16")	2.3	180mm (7 1⁄16")	100mm (4")



The curtain fullness indicated in the chart above and throughout this guide applies to finished curtain fabric. You will need to allow additional fabric for joins, hems and your usual workroom allowances.


80MM (3 1/8") GLIDER & ROLLER CORD OPTION

Glider/roller cord = 80mm (3 1/8")  
Hook spacing = 160mm (6 5/16")  
Pocket spacing between hooks (pocket factor\*) = 7 approx.  
Approx. fabric fullness = 2.3  
Depth of Wave (front to back) = 160mm (6 5/16")

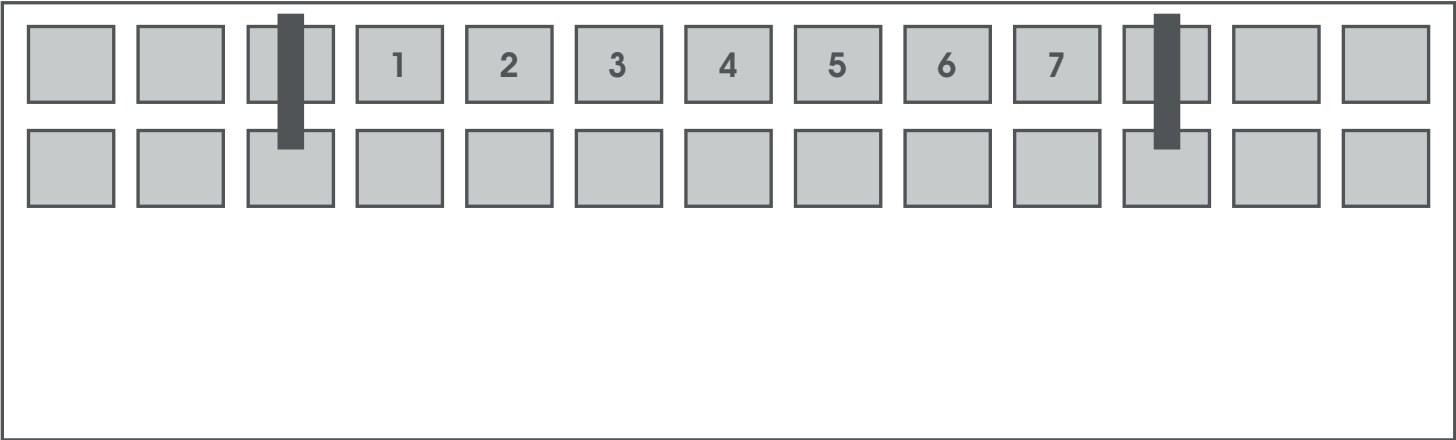

60MM (2 3/8") GLIDER OPTION

Glider cord = 60mm (2 3/8") Spacing  
Hook spacing = 120mm (4 3/4")  
Pocket spacing between hooks (pocket factor\*) = 5  
Approx. fabric fullness = 2.3  
Depth of Wave (front to back) = 120mm (4 3/4")

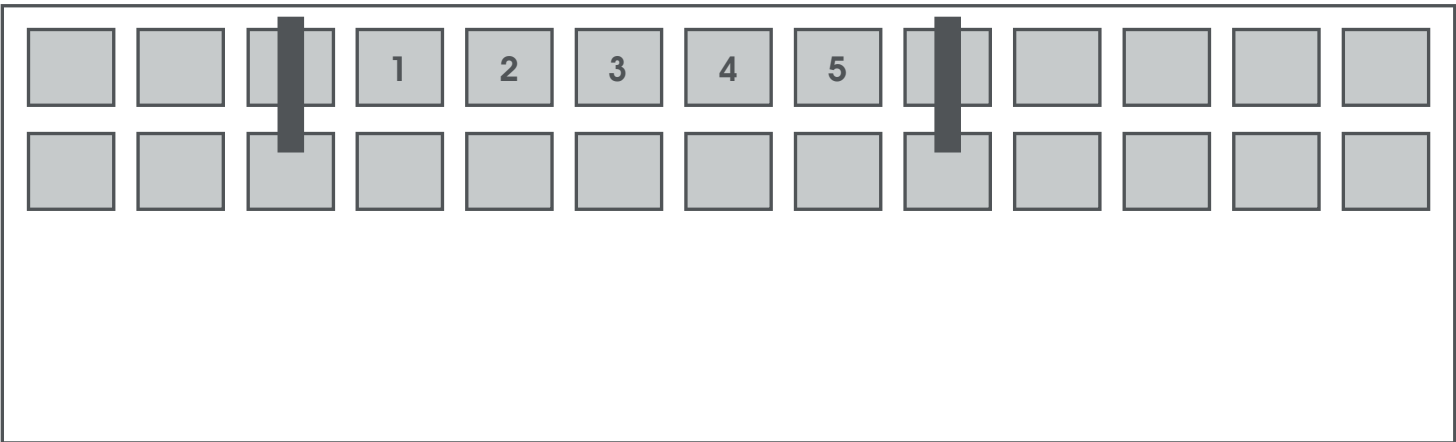

**80MM (3<sup>1</sup>/<sub>8</sub>" ) GLIDER CORD STANDARD OPTION**

take the finished track size and find the corresponding size on the chart below to look up the number of gliders required.



Note an even number of gliders are required.

Track length	Number of hook points per curtain.		Track length	Number of hook points per curtain.		Track length	Number of hook points per	
	Single Stack →	Pair Stack → ←		Single Stack →	Pair Stack → ←		Single Stack →	Pair Stack → ←
400mm	6	--	5200mm	66	34	10000mm	126	64
560mm	8	6	5360mm	68	36	10160mm	128	66
720mm	10	6	5520mm	70	36	10320mm	130	66
880mm	12	8	5680mm	72	38	10490mm	132	68
1040mm	14	8	5840mm	74	38	10650mm	134	68
1200mm	16	10	6000mm	76	40	10810mm	136	70
1360mm	18	10	6160mm	78	40	10970mm	138	70
1520mm	20	12	6320mm	80	42	11130mm	140	72
1680mm	22	12	6480mm	82	42	11290mm	142	72
1840mm	24	14	6640mm	84	44	11450mm	144	74
2000mm	26	14	6800mm	86	44	11610mm	146	74
2160mm	28	16	6960mm	88	46	11770mm	148	76
2320mm	30	16	7120mm	90	46	11930mm	150	76
2480mm	32	18	7280mm	92	48	12090mm	152	78
2640mm	34	18	7440mm	94	48	12250mm	154	78
2800mm	36	20	7600mm	96	50	12410mm	156	80
2960mm	38	20	7760mm	98	50	12570mm	158	80
3120mm	40	22	7920mm	100	52	12730mm	160	82
3280mm	42	22	8080mm	102	52	12890mm	162	82
3440mm	44	24	8240mm	104	54	13050mm	164	84
3600mm	46	24	8400mm	106	54	13210mm	166	84
3760mm	48	26	8560mm	108	56	13370mm	168	86
3920mm	50	26	8720mm	110	56	13530mm	170	86
4080mm	52	28	8880mm	112	58	13690mm	172	88
4240mm	54	28	9040mm	114	58	13850mm	174	88
4400mm	56	30	9200mm	116	60	14010mm	176	90
4560mm	58	30	9360mm	118	60	14170mm	178	90
4720mm	60	32	9520mm	120	62	14330mm	180	92
4880mm	62	32	9680mm	122	62	14490mm	182	92
5040mm	64	34	9840mm	124	64	14650mm	184	94



### 60MM (2<sup>3</sup>/<sub>8</sub>" ) GLIDER CORD OPTIONAL

take the finished track size and find the corresponding size on the chart below to look up the number of gliders required.



Note an even number of gliders are required.

Track length	No. of gliders/rollers per curtain.		Track length	No. of gliders/rollers per curtain.		Track length	No. of gliders/rollers per curtain.	
	Single Stack →	Pair Stack → ←		Single Stack →	Pair Stack → ←		Single Stack →	Pair Stack → ←
300mm	6	--	390mm	66	34	7500mm	126	64
420mm	8	6	4020mm	68	36	7620mm	128	66
540mm	10	6	4140mm	70	36	7740mm	130	66
660mm	12	8	4260mm	72	38	7860mm	132	68
780mm	14	8	4380mm	74	38	7980mm	134	68
900mm	16	10	450mm	76	40	810mm	136	70
1020mm	18	10	4620mm	78	40	8220mm	138	70
1140mm	20	12	4740mm	80	42	8340mm	140	72
1260mm	22	12	4860mm	82	42	8460mm	142	72
1380mm	24	14	4980mm	84	44	8580mm	144	74
150mm	26	14	510mm	86	44	870mm	146	74
1620mm	28	16	5220mm	88	46	8820mm	148	76
1740mm	30	16	5340mm	90	46	8940mm	150	76
1860mm	32	18	5460mm	92	48	9060mm	152	78
1980mm	34	18	5580mm	94	48	9180mm	154	78
210mm	36	20	570mm	96	50	930mm	156	80
2220mm	38	20	5820mm	98	50	9420mm	158	80
2340mm	40	22	5940mm	100	52	9540mm	160	82
2460mm	42	22	6060mm	102	52	9660mm	162	82
2580mm	44	24	6180mm	104	54	9780mm	164	84
270mm	46	24	630mm	106	54	9900mm	166	84
2820mm	48	26	6420mm	108	56	10020mm	168	86
2940mm	50	26	6540mm	110	56	10140mm	170	86
3060mm	52	28	6660mm	112	58	10260mm	172	88
3180mm	54	28	6780mm	114	58	10380mm	174	88
330mm	56	30	690mm	116	60	1050mm	176	90
3420mm	58	30	7020mm	118	60	10620mm	178	90
3540mm	60	32	7140mm	120	62	10740mm	180	92
3660mm	62	32	7260mm	122	62	10860mm	182	92
3780mm	64	34	7380mm	124	64	10980mm	184	94

CALCULATE THE LENGTH OF THE HEADER TAPE

Next, use the number of gliders calculated from the previous stage to determine the length of your heading tape. We strongly advise that you do not cut your fabric until you have confirmed the length of the heading tape


There are two ways to calculate how much heading tape you require.

**A** Check your order, the number of gliders for each system should be listed  
If you can not find this information please call to sales desk, who will be happy to help.


**B** To calculate the length of the tape follow these steps:

- 1 Take the number of gliders for the previous chart
- 2 Subtract 1
- 3 Multiply this number by your pocket factor see diagram below
- 4 Add back on the total amount of glider from step 1
- 5 Add on a further 8 pockets

80mm (3 1/8") GLIDER & ROLLER CORD OPTION  
pocket factor = 7

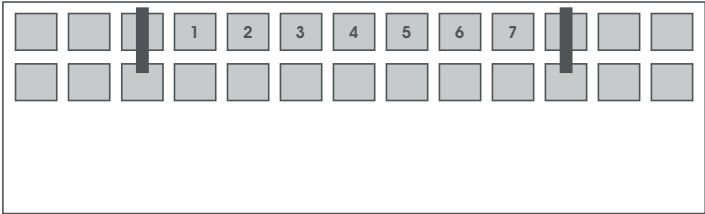

60mm (2 3/8") GLIDER OPTION  
pocket factor = 5

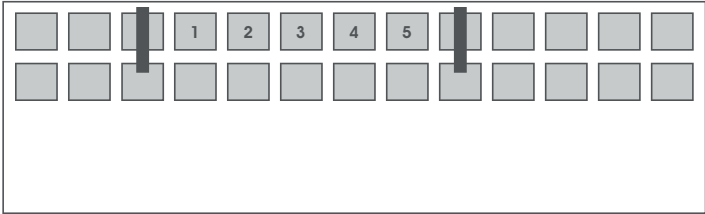


**EXAMPLE**  
1500mm Wide with a pair stack. Using 80mm (3 1/8") glider cord with 160mm (6 1/16") hook spacing:

Step 1: 12  
Step 2: 12 - 1 = 11  
Step 3: 11 x 7 = 77  
Step 4: 77 + 12 = 89  
Step 5: 89 + 8 = 97 pockets


Therefore your tape length will be equal to 97 pockets. Do not cut your fabric yet!

**\*Pockets should be counted NOT measured**

- 1 Cut the tape according to the number of pockets.  
The wave tape has a small stitch mark every 50 pockets to help count out the correct length of tape.

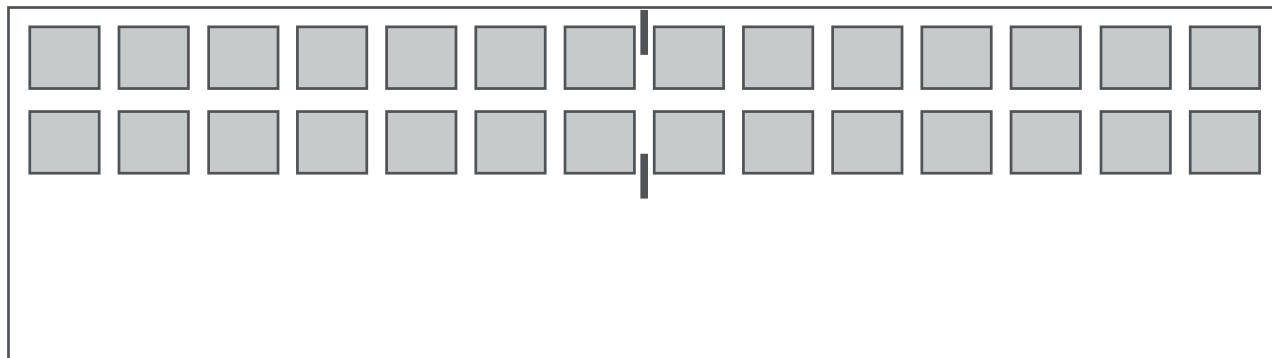


- 2 Turn in 2 pockets at each end of the tape.  
Now you have your finished curtain width, measure this to cut your fabric.

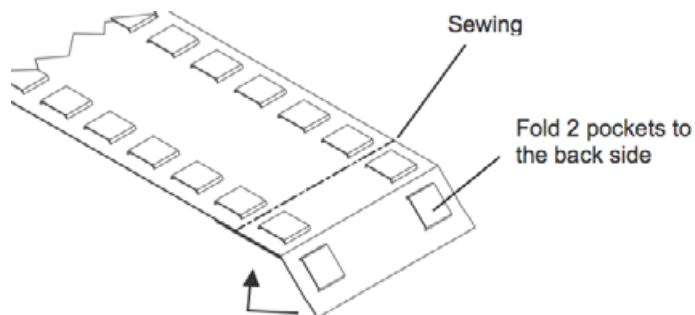


- 3 We recommend that you use the wave hemming tape to avoid fabric puckering and give a professional finish to the top hem.

If using glider cord measure the hem to 75mm (3") if using roller cord measure the hem to 95mm (3<sup>3</sup>/<sub>4</sub>") and then iron the hem in position.

Lift the hem back and lay on the iron-on tape and then iron the hem so that the tape melts and sticks the 2 parts of the hem together.

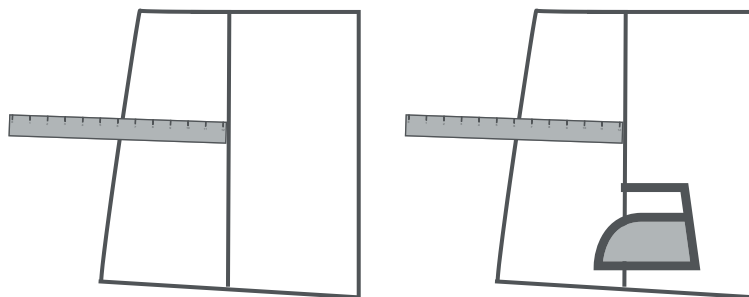


4 The tape can now be sewn to the top of the curtain. It has been designed to give the correct glider cord hook drop when sewn in this position.




Note If using roller cord sew the tape 7mm (3/4") from the top of the curtain. This ensure the correct hook drop

HEADER TAPE POSITION  
GLIDER CORD

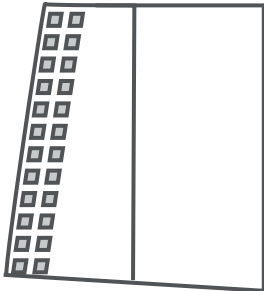


HEADER TAPE POSITION  
ROLLER CORD

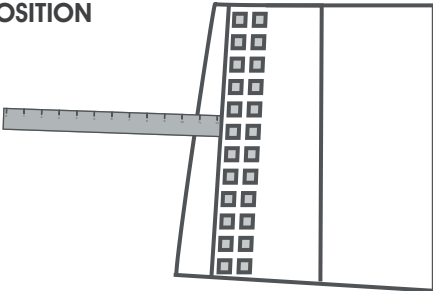

5 The first hook always goes into the third pocket from the leading edge and then hooks are inserted as required according to the relevant pocket factor (see below).  
e.g. *pocket factor = 7 then insert a hook, leave 7 empty pockets & insert next hook.*


POCKET FACTOR


80mm (3 1/8") Glider & roller cord option

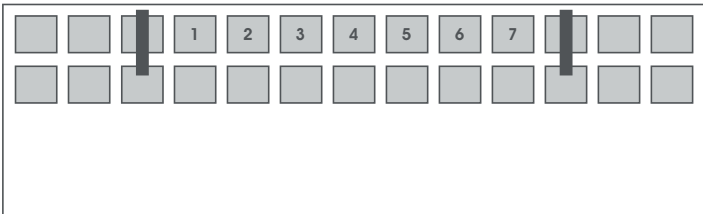


POCKET FACTOR

60mm (2 3/8") Glider option

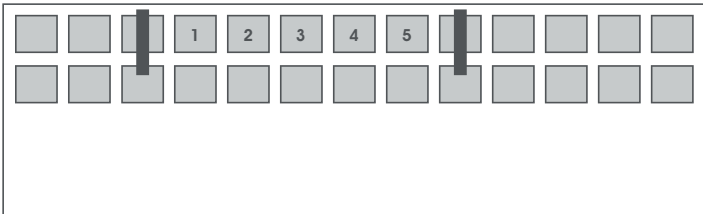




IF YOU ARE USING WAVE GLIDER CORD,  
HOOKS ARE POSITIONED IN THE TOP  
ROW OF POCKETS.




IF YOU ARE USING WAVE ROLLER CORD,  
HOOKS ARE POSITIONED IN THE BOTTOM  
ROW OF POCKETS.

6 When hanging the curtain pull the first fold towards you and the second away from you.

CURTAIN DRESSED CORRECTLY

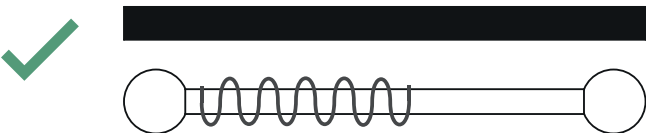

CURTAIN DRESSED INCORRECTLY

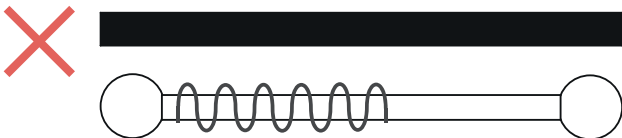

7 If the fabric does not automatically fall into the wave at the bottom we recommend you try using a lead weight cord in the hem and fabric side weights.

# CONTACT

[www.bradleycollection.com](http://www.bradleycollection.com)



## UK & REST OF THE WORLD

☎ +44 (0)1449 722 724

✉ [info@bradleycollection.com](mailto:info@bradleycollection.com)

## USA & CANADA

☎ +1 (310) 815 8255

✉ [info.us@bradleycollection.com](mailto:info.us@bradleycollection.com)

---

## LONDON SHOWROOM

☎ +44 (0)207 871 7793

✉ [showroom@studiotwochelsea.com](mailto:showroom@studiotwochelsea.com)


## THE BRADLEY COLLECTION



CEDIA  
MEMBER

Specialised fixings for mounting brackets will be required in certain situations and are not provided as standard. Steel items are not recommended for damp conditions such as shower rooms. Crystal finials should not be positioned in direct sunlight, and are not suitable for use in conservatories. Fluid Metal items are supplied unlacquered and will tarnish over time.

The Bradley Collection reserves the right to modify design and materials without prior notice as part of a process of continual product improvement. Due to printing limitations, colours in this brochure may not be accurate.

Products are protected by Design Rights, under provisions of Copyright, Designs & Patents Act 1988. Bradley®, The Bradley Collection® and  Logo are registered Community trademarks of The Bradley Collection Ltd. in Europe and registered trademarks of the Bradley Collection, Inc. in the USA.

**The Bradley Collection Ltd** Lion Barn • Maitland Road • Needham Market • Suffolk • IP6 8NS • UK