

SPECIFICATION GUIDE

SPECIFICATION GUIDE

This specification guide was designed to outline the main considerations that need to be made when quoting or ordering a system.

If any questions arise please call your local sales representative or contact The Bradley Collection directly.

System Information Page 3-14

POLES Page 4 FRENCH POLES Page 5 JOINING & BAYS Page 6 MINIMUM WALL SIZES Page 7 PASSING SYSTEM Page 8 CUSTOM BRACKETS Page 9 CURTAIN DROPS Page 10-13 DRAPERY ARM Page 14 Finishes Page 15-16 Finials Page 17-41

Poles Page 42-46

Brackets Page 47-63

Rings Page 64-66

Accessories Page 67-72

THE **BRADLEY** COLLECTION

SYSTEM INFORMATION

3

Poles are cut, bent and curved to suit individual requirements.


When calculating the length of your pole, remember to allow tolerance beyond the width of the frame for the curtains to draw back to the edge of the window.

Maximum pole length in one piece 4.0 (157")*.

Poles exceeding the recommended maximum distance between brackets, will be cut into equal parts unless otherwise specified. Pole joiners will be supplied. Mid or passing brackets should be placed at every join.

Pole diameter's - Ø19mm (3/4") • 25mm (1") • 38mm (11/2") • 50mm (2")


The overall pole cost is rounded up in 300mm (1ft) increments.

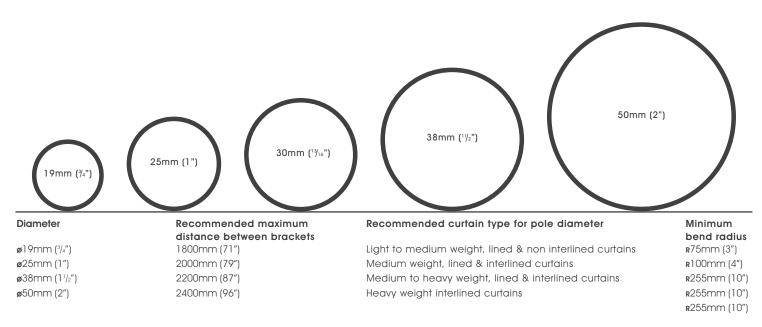

PROVIDING POLE LENGTHS

Pole lengths can be specified in two ways.

OPTION A is our prefered method. This covers Pole length only. OPTION B combines pole and finial lengths.

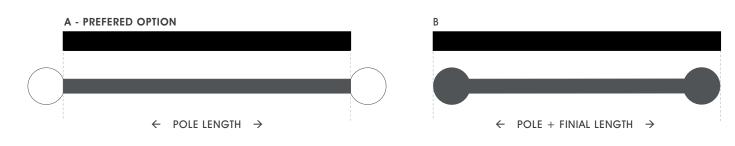

Poles are cut, bent and curved to suit individual requirements.


When calculating the length of your pole, remember to allow tolerance beyond the width of the frame for the curtains to draw back to the edge of the window.

Maximum pole length in one piece $4.0(157'')^*$.


Poles exceeding the recommended maximum distance between brackets, will be cut into equal parts unless otherwise specified. Pole joiners will be supplied. Mid or passing brackets should be placed at every join.

Pole diameter's - Ø25mm (1")

The overall pole cost is rounded up in 300mm (1ft) increments.

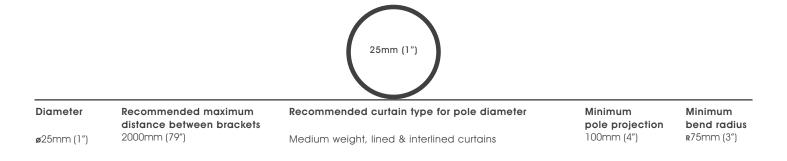


25MM (1") FRENCH POLE

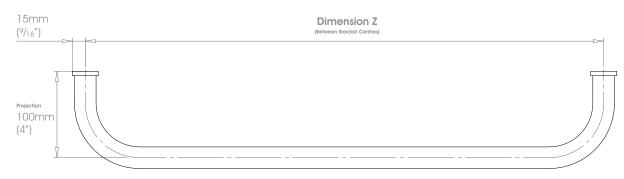

PROVIDING POLE LENGTHS

Pole lengths should be specified between bracket centres.

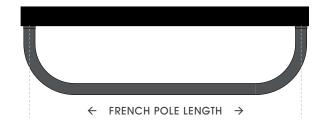


JOINING POLES

Joins must always be supported by a bracket.



BESPOKE BAYS

Bradley's bespoke service allows poles to be specifically made for unique bay windows and complex long span installations. Poles can be shaped to create a system that follows contours. Passing rings have been designed to traverse over brackets and around bends. Using a double pole system in a bay window can create an elegant as well as practical treatment.

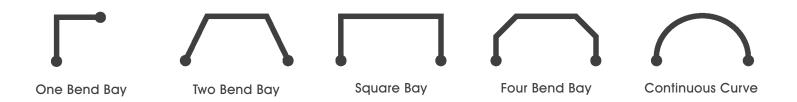



Bay Checker + is part of our Digital Toolbox, allowing you to check your measurement for bays and curves whilst onsite, as well as storing straight window dimensions for your projects.


Unlimited measurements may be saved locally to your device or shared to your colleagues.

Available as a free download for iOS or Android,

For more information on Bay Checker + and latest enhancements to our Digital Toolbox visit


www.bradleycollection.com/digital-toolbox/





135° Bend Angles

Diameter	Return 1-A	Wall A - B	Wall B - C	Minimum Bend Radius	Minimum Projection
ø19mm (³/₄″)	n/a	115mm (4 ¹ / ₂ ")	115mm (4 ¹ /2")	75mm (3")	60mm (2³/₀″)
ø19mm (³/₄″)	75mm (3")	120mm (4 ³ / ₄ ")	115mm (4 ¹ /2")	75mm (3")	60mm (2³/₅″)
ø 25mm (1")	n/a	140mm (5¹/₂″)	140mm (5½″)	100mm (4")	60mm (2³/₅″)
ø 25mm (1")	100mm (4")	140mm (5 ¹ / ₂ ")	140mm (5 ¹ /2")	100mm (4")	60mm (2³/₅")
ø 38mm (1 ¹ /2")	n/a	240mm (9 ⁷ /16″)	240mm (9 ⁷ /16″)	254mm (10")	100mm (4")
ø 38mm (11/2")	250mm (9 ¹³ /16")	390mm (15³/₀″)	240mm (9 ⁷ /16″)	254mm (10")	150mm (5 ⁷ /8″)
ø 50mm (2")	n/a	240mm (9 ⁷ /16″)	240mm (9 ⁷ /16″)	254mm (10")	100mm (4")
ø 50mm (2")	250mm (9 ¹³ /16″)	390mm (15³/₅″)	240mm (9 ⁷ /16″)	254mm (10")	150mm (5 ⁷ /8″)

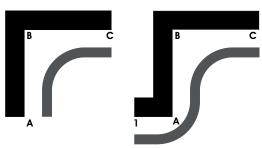


90° Bend Angles

Diameter	Return 1-A	Wall A - B	Wall B - C	Minimum Bend Radius	Minimum Projection
ø19mm (³/₄″)	n/a	200mm (8")	200mm (8")	75mm (3")	60mm (2³/₀″)
ø19mm (³/₄″)	75mm (3")	200mm (8")	200mm (8")	75mm (3")	60mm (2³/8″)
ø 25mm (1")	n/a	230mm (9¹/ュ៰″)	230mm (9¹/ュሬ″)	100mm (4")	60mm (2³/₅″)
ø 25mm (1")	100mm (4")	230mm (9¹/ı₀″)	230mm (9 ¹ /16″)	100mm (4")	60mm (2³/₀″)
ø 38mm (1 ¹ / ₂ ")	n/a	450mm (17 ¹¹ /16″)	450mm (17 ¹¹ /16″)	254mm (10")	100mm (4")
ø38mm (11/2")	250mm (9 ¹³ /16″)	600mm (23 ⁵ /8″)	450mm (17 ¹¹ /16″)	254mm (10")	150mm (5 ⁷ / ₈ ")
ø 50mm (2")	n/a	450mm (1711/16″)	450mm (17 ¹¹ /16″)	254mm (10")	100mm (4")
ø 50mm (2")	250mm (9 ¹³ /16")	600mm (23 ⁵ /8″)	450mm (17 ¹¹ /16")	254mm (10")	150mm (5 ⁷ /8″)

Passing brackets and passing rings allow drapes to traverse around bays and multi-pole systems. passing is available on single pole systems. Passing will only work if the system is correctly installed and the drapes are properly made and attached to the rings.

PASSING GUIDELINES

- 1. Do make sure the top of the drapery ends underneath the main ring and does not touch or go above the bottom of the ring.
- 2. Always have the drapery hook perpendicular to the ringlet. Ringlets should not be sewn into a pinch pleat.
- 3. Be sure to have very little to no puddle on drapery, especially if the fabric is stiff. A stiff header can also cause the rings to not move freely.
- 4. If using lightweight or sheer fabric, the fabric needs to be weighted enough to pull the rings into the correct passing position.
- 5. Passing rings are not recommended with draw rods.

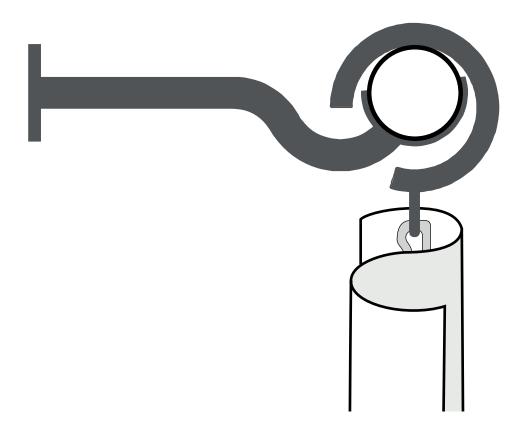

CUSTOM BRACKETS

Steel can be customised to suit virtually any window. For simple projection changes between the Minimums and Maximums listed below brackets are charged at double their standard costs. For all other customisations an additional custom fee is applied per drawing



Custom Projection Specify the exact projection needed.



Custom Fixing Plate Relevant where space is restricted or weight is a concern.



Uplift Helps negotiate cornice and similar architectural features.



Arm For really tricky installations, arms without backplates can be designed for direct fixing.



Angled Brackets The solution for tight and awkward locations.


Minimum & Maximum Bracket Projections

Dimensions outside of these stated min/max projections may still possible but will generate a design charge per drawing. See Price List for details


Diameter	Туре	Standard Projection(s)	Minimum Projection	Maximum Projection
ø19mm (³/₄″)	Side	60mm (2³/8") • 100mm (4")	58mm (2⁵/ı₀″)	200mm (8")
ø19mm (³/₄″)	Mid	60mm (2³/₅") • 100mm (4")	30mm (1³/16″)	200mm (8")
ø19mm (³/₄″)	Passing	60mm (2³/₅") • 100mm (4")	47mm (1 ⁷ /8″)	200mm (8")
ø19mm (³/₄″)	Ceiling	60mm (2³/₅") • 100mm (4")	20mm (¹³ /16″)	200mm (8")
ø19mm (³/₄″)	Ceiling Passing	60mm (2³/₅") • 100mm (4")	52mm (2¹/ュሬ″)	200mm (8")
ø 25mm (1″)	Side	60mm (2³/₅") • 100mm (4") • 140mm (5¹/₂")	60mm (2³/₅″)	200mm (8")
ø 25mm (1")	Mid	60mm (2³/₅″) • 100mm (4″) • 140mm (5¹/₂″)⊕	36mm (1 ⁷ /16")	200mm (8")
ø 25mm (1")	Passing	60mm (2³/₅″) • 100mm (4″) • 140mm (5¹/₂″)⊕	50mm (2")	200mm (8")
ø 25mm (1″)	Ceiling	60mm (2³/₅") • 100mm (4")	26mm (1")	200mm (8")
ø 25mm (1″)	Ceiling Passing	60mm (2³/₅″) • 100mm (4″)	95mm (3³/₄″)	200mm (8")
ø 38mm (1¹/₂″)	Side	100mm (4")	92mm (3⁵/₅″)	200mm (8")
ø 38mm (1¹/₂″)	Mid	100mm (4")	47mm (1 ⁷ /8″)	200mm (8")
ø 38mm (1¹/₂″)	Passing	100mm (4")	85mm (3 ⁵ /16″)	200mm (8")
ø 38mm (1¹/₂″)	Ceiling	100mm (4")	35mm (1³/₃″)	200mm (8")
ø 38mm (1¹/₂″)	Ceiling Passing	100mm (4")	95mm (2³/₄″)	200mm (8")
ø50mm (2")	Side	100mm (4")	94mm (3 ^{11/} 16″)	200mm (8")
ø 50mm (2")	Mid	100mm (4")	60mm (2³/₀″)	200mm (8")
ø 50mm (2")	Passing	100mm (4")	95mm (3³/₄″)	200mm (8")
ø 50mm (2")	Ceiling	100mm (4")	n/a	200mm (8")
ø 50mm (2")	Ceiling Passing	100mm (4")	n/a	200mm (8")

The information below shows the relationship between the pole, brackets and rings. This will enable the correlation between pole heights and curtain drops to be easily calculated.


19mm (3/4") SINGLE BRACKETS

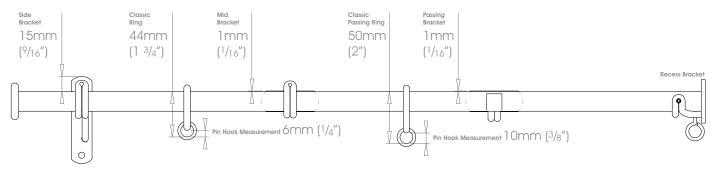


25mm (1") SINGLE BRACKETS

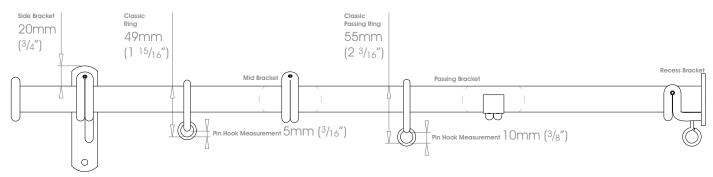


38mm (11/2") SINGLE BRACKETS

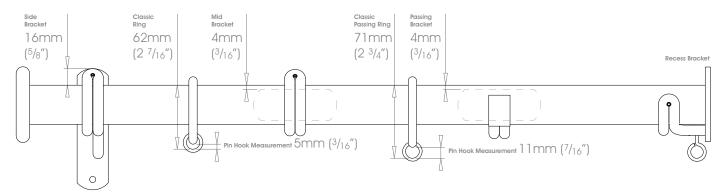


50mm (2") SINGLE BRACKETS

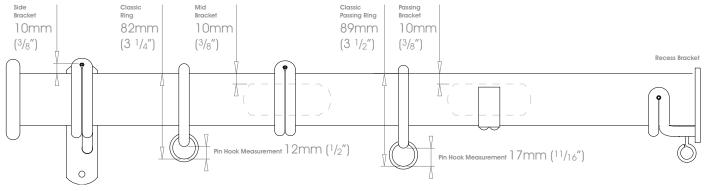


19mm (3/4") COVERED SINGLE BRACKETS

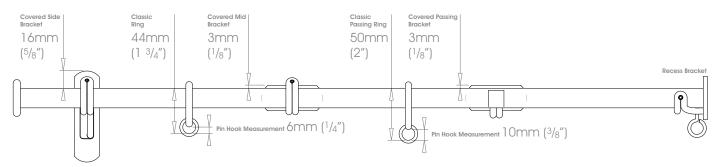


25mm (1") COVERED SINGLE BRACKETS

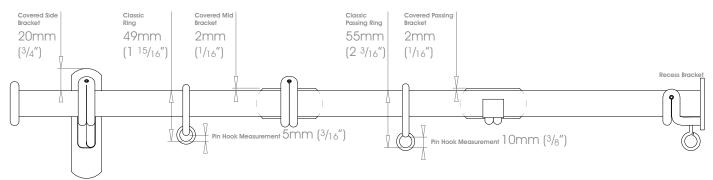

38mm (11/2") COVERED SINGLE BRACKETS

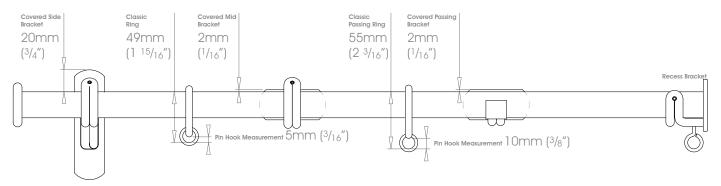


50mm (2") COVERED SINGLE BRACKETS

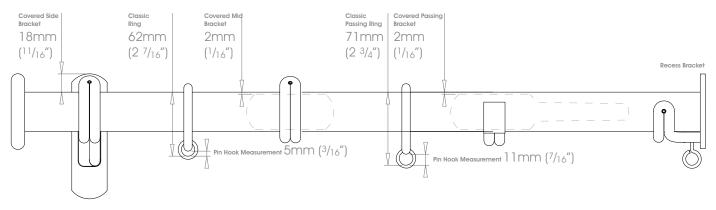


CURTAIN DROPS

FRONT 25mm (1") BACK 19mm (3/4") DOUBLE BRACKETS

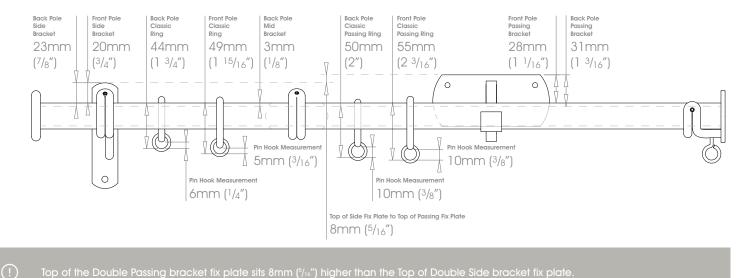


FRONT 38mm (11/2") BACK 25mm (1") DOUBLE BRACKETS

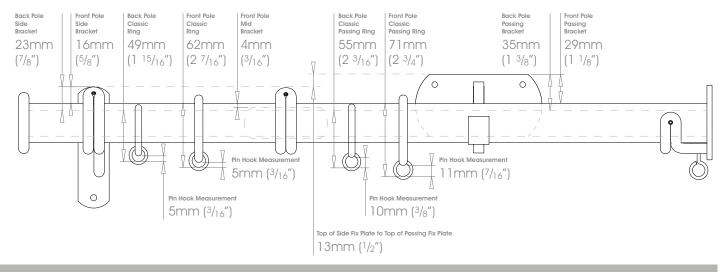

(!)

25mm (1") French Brackets

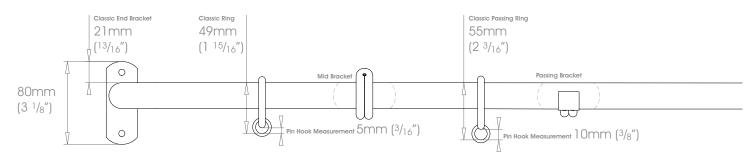

The 25mm (1") drapery arm, offered in all the available finish options, is designed to work with dormer windows, doorways or above beds.

The drapery arm has a levelling adjustment and light Weight finials and fabric are suggested.

The maximum recommended arm length is 1000mm (3'4").



FINISHES

The beauty of the mild steel base shines through with these special translucent finishes.



© Satin coat

CUSTOM FINISHES

Can be specified from RAL K7 finish chart, subject to a per colour upcharge. which covers up to five poles. See pricelist for further details



COLOUR MATCHING

A colour matching service is offered, to match your scheme of fittings perfectly . See pricelist for further details




FINISHES Coat Options Satin © Polished • Natural Steel • Brass Toned • Matte Brass Toned • Antique Brass@ • Bronzed@ • Oil Rubbed • Waxed • Flint@ Satin © Satin ©

19mm (³/₄")


25mm (1")






38mm (1¹/₂")

50mm (2")









FINISHES Coat Options Satin © Polished • Natural Steel • Brass Toned • Matte Brass Toned • Antique Brass@ • Bronzed@ • Oil Rubbed • Waxed • Flint@ Satin © Satin ©

19mm (³/4")


25mm (1")






38mm (1¹/2")

50mm (2")

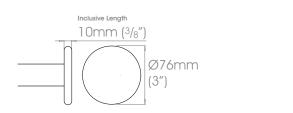







FINISHES Coat Options Satin ©

19mm (³/₄")


25mm (1")





38mm (1¹/₂")

50mm (2")

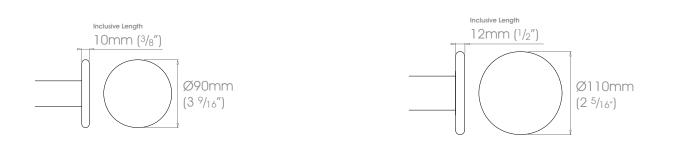


.




FINISHES Coat Options Satin ©

19mm (³/4")

25mm (1")





38mm (1¹/2")

50mm (2")





FINISHES Coat Options Sotin ©

19mm (³/₄")	25mm (1")
$ \begin{array}{c} 28mm (1 \frac{1}{8''}) \\ 1nclusive Length \\ 12mm (1/2'') \\ 16mm (5/8'') \\ 028mm \\ (1 \frac{1}{8''}) \end{array} $	$ \begin{array}{c} 31 \text{mm} (1 \frac{3}{16''}) \\ 1 \text{ Inclusive Length} \\ 15 \text{mm} (9/16'') \\ 16 \text{mm} (5/8'') \\ \hline 0 0 0 0 0 0 0 0 0 0 0 0 0$





FINISHES Coat Options Sotin © Polished • Natural Steel • Brass Toned • Matte Brass Toned • Antique Brass© • Bronzed© • Oil Rubbed • Waxed • Flint© See page 16 for details Sotin ©

.....

19mm (³/4")


25mm (1")





38mm (1¹/2")

50mm (2")



.....



FINISHES Coat Options Satin ©

19mm (³/4")

25mm (1")






38mm (1¹/2")

50mm (2")



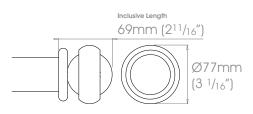

.




FINISHES Coat Options Satin ©
Polished • Natural Steel • Brass Toned • Matte Brass Toned • Antique Brass@ • Bronzed@ • Oil Rubbed • Waxed • Flint@ See page 16 for details Satin ©

19mm (³/₄")

25mm (1")





38mm (1¹/2")

50mm (2")





.



FINISHES Coat Options Satin ©

19mm (³/₄") 25mm (1") 10mm (³/₅") 13mm (¹/₂")

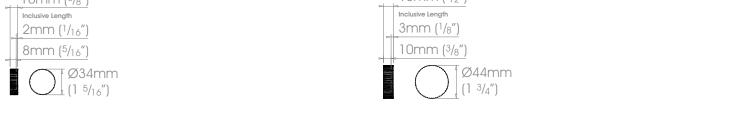


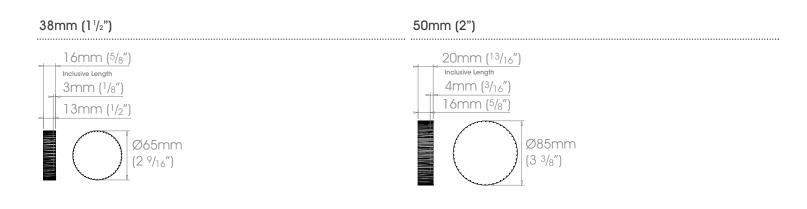



FINISHES Coat Options Satin ©

19mm (³/₄") 25mm (1")

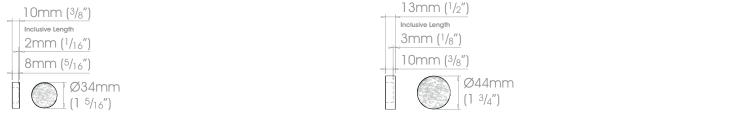

38mm (1 ¹ /2")	50mm (2")
$ \begin{array}{c} 16mm (5/8") \\ \hline \text{Inclusive Length} \\ 3mm (1/8") \\ \hline 13mm (1/2") \\ \hline 065mm \\ (2 9/16") \end{array} $	$ \begin{array}{c} 20mm (13/16'') \\ \hline 16mm (3/16'') \\ \hline 16mm (5/8'') \\ \hline \hline$




FINISHES Coat Options Sotin © Polished • Natural Steel • Brass Toned • Matte Brass Toned • Antique Brass© • Bronzed© • Oil Rubbed • Waxed • Flint© See page 16 for details Sotin ©

19mm (³/₄")

25mm (1")





38mm (1¹/2")

50mm (2")



.



) Please note that due to manufacturing process's size and shape may vary slightly to shown diagram.

FINISHES Coat Options Satin ©

19mm (³/4")

25mm (1")





38mm (1¹/2") - NOT AVAILABLE




FINISHES Coat Options Sotin © Polished • Natural Steel • Brass Toned • Matte Brass Toned • Antique Brass© • Bronzed© • Oil Rubbed • Waxed • Flint© Coat Options Sotin ©

19mm (³/₄")

25mm (1")

.....





38mm (1¹/₂") - NOT AVAILABLE



- Crystal finials should not be positioned in direct sunlight, and are not suitable for use in conservatories


FINISHES Coat Options Satin ©

19mm (³/4")


25mm (1")

.....





38mm (1¹/₂")

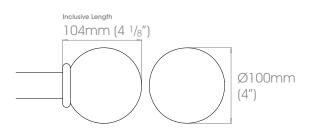





Please note that due to manufacturing process's size and shape may vary slightly to shown diagram.

FINISHES Coat Options Satin ©


19mm (³/₄")

25mm (1")

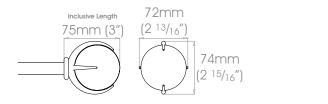

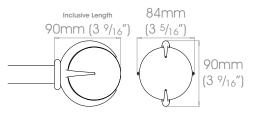

38mm (11/2")

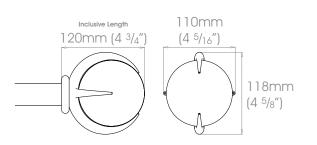




(!)


FINISHES Coat Options Satin ©

19mm (³/4")


25mm (1")

.....



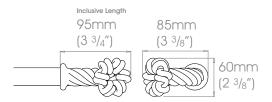

38mm (11/2")

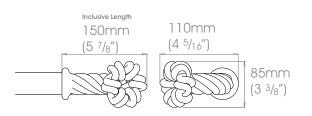




FINISHES Polished • Natural Steel • Brass Toned • Matte Brass Toned • Antique Brass@ • Bronzed@ • Oil Rubbed • Waxed • Flint@ Custom See page 16 for details Coat Options . Satin ©

19mm (³/₄")


(!)

25mm (1")

.....







mm

38mm (1¹/₂") - NOT AVAILABLE


(!)



Please note that due to manufacturing process's size and shape may vary slightly to shown diagram.


.....

FINISHES Coat Options Satin ©

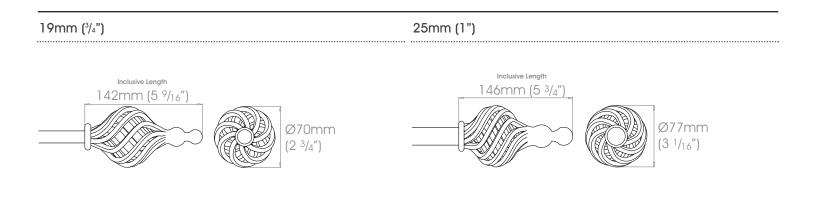

.....


38mm (1¹/₂")

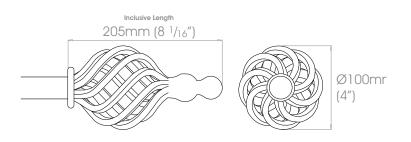



Please note that due to manufacturing process's size and shape may vary slightly to shown diagram.

FINISHES Coat Options Satin ©

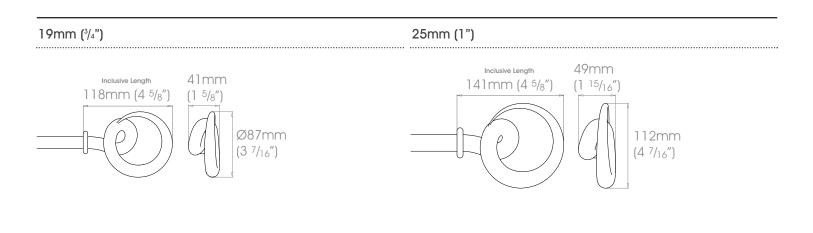

.....


38mm (1¹/₂") - NOT AVAILABLE




FINISHES Coat Options
Polished • Natural Steel • Brass Toned • Matte Brass Toned • Antique Brass® • Bronzed® • Oil Rubbed • Waxed • Flint® Coat Options
Cost Options Coat Options . Satin ©

19mm (³/₄")

25mm (1")

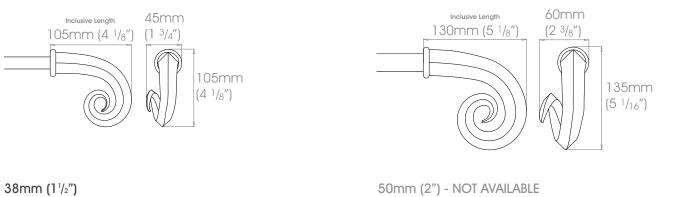


38mm (11/2")

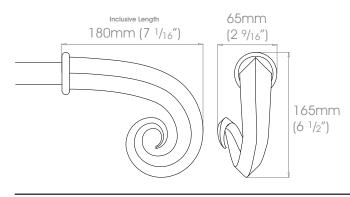



Please note that due to manufacturing process's size and shape may vary slightly to shown diagram.

FINISHES Coat Options Satin ©

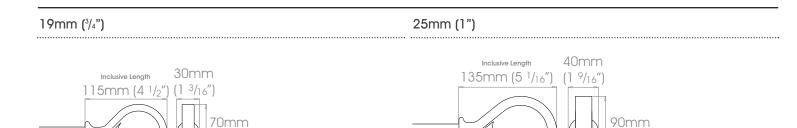

38mm (1¹/₂")

180mm (7 ¹/₁₆") 50mm (2") (2") (2") (4 ¹⁵/₁₆")

(2 3/4")

50mm (2") - NOT AVAILABLE


.....

 $(1 \ 1/2'')$




Please note that due to manufacturing process's size and shape may vary slightly to shown diagram.

FINISHES Coat Options Satin ©

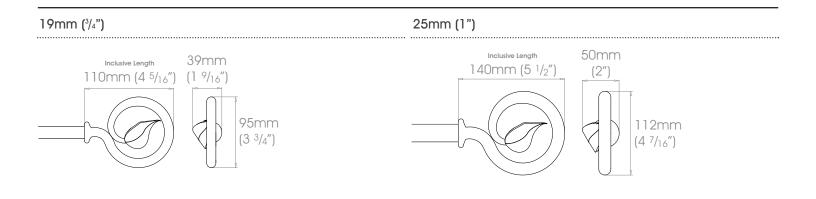

38mm (11/2")

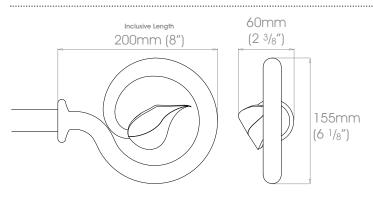

50mm (2") - NOT AVAILABLE

SQUARE RAMS HORN



Please note that due to manufacturing process's size and shape may vary slightly to shown diagram.


FINISHES Coat Options Satin ©

19mm (³/4")

.....


25mm (1")

.....

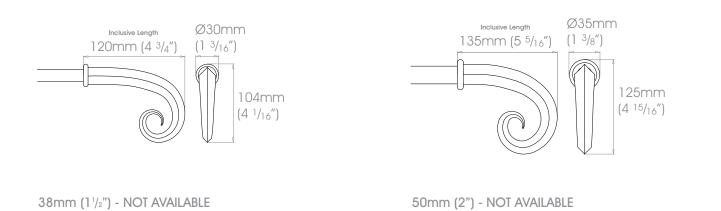




Please note that due to manufacturing process's size and shape may vary slightly to shown diagram.

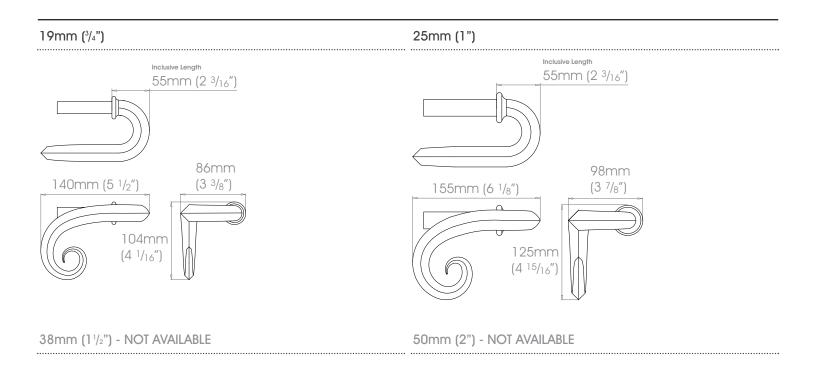



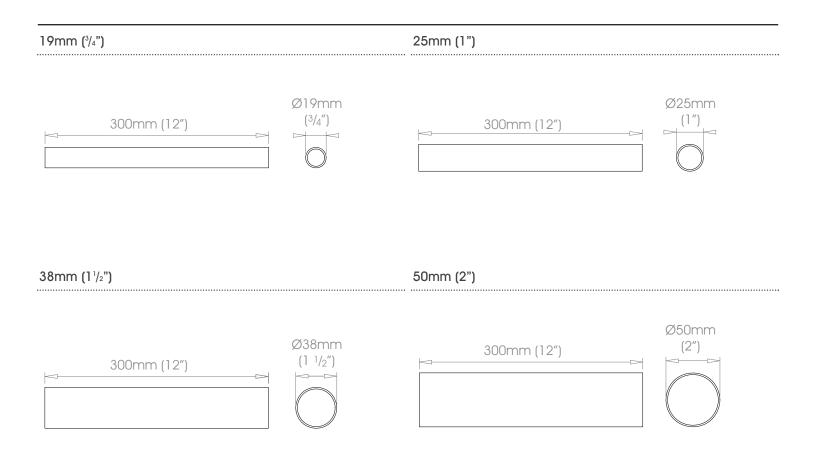




FINISHES Coat Options Satin © Polished • Natural Steel • Brass Toned • Matte Brass Toned • Antique Brass@ • Bronzed@ • Oil Rubbed • Waxed • Flint@ Satin © Satin ©

19mm (³/₄")

25mm (1")










50mm (2")

.....




.....

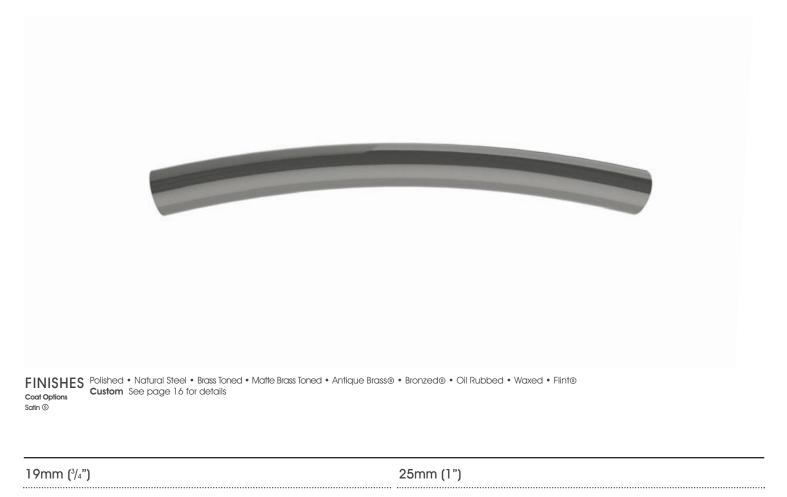

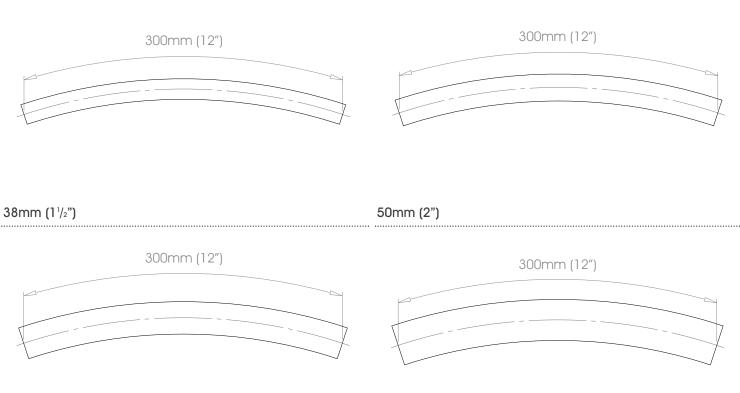





25mm (1")





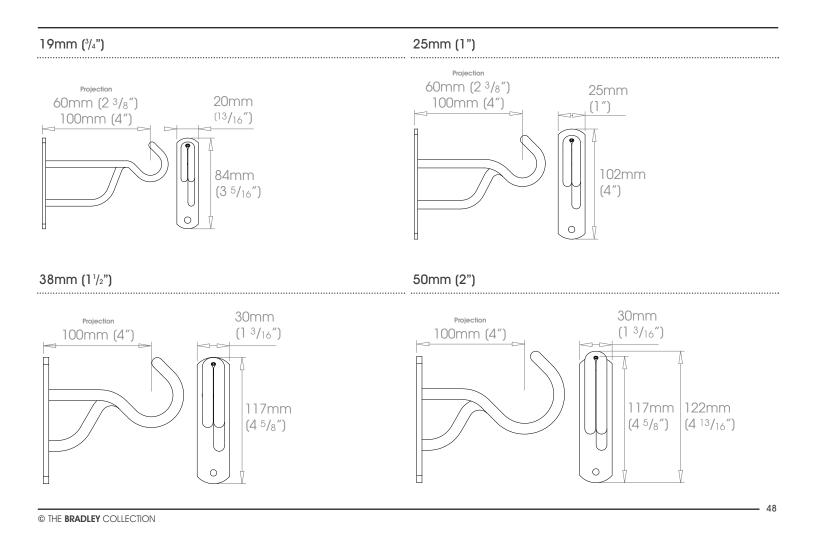




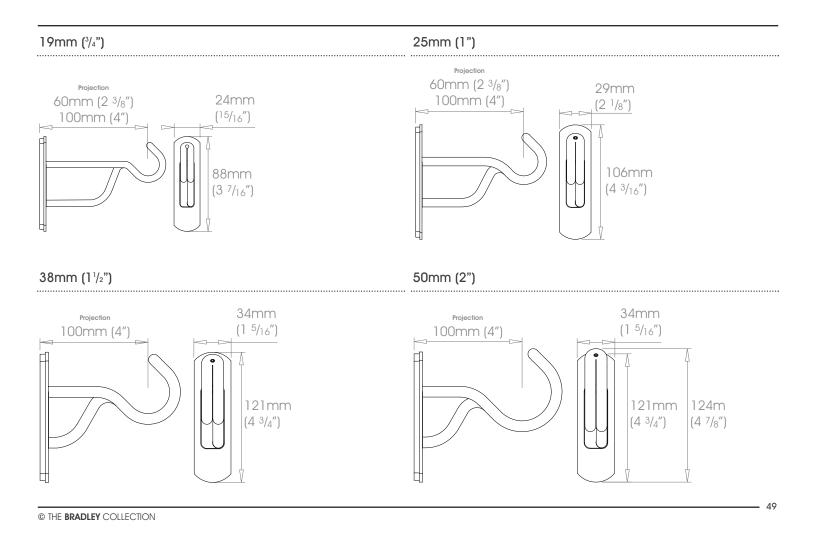




FINISHES Coat Options Satin © Satin ©

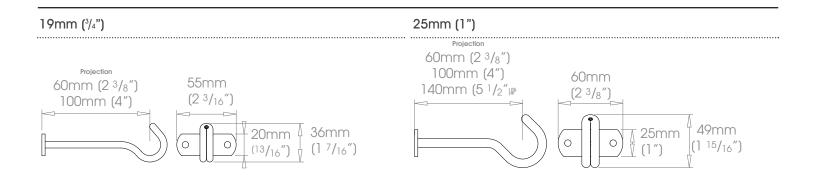

38mm (1¹/₂") 50mm (2") Projection Projection 80mm 80mm 100mm (4") 100mm (4") (3 1/8") $(3^{1}/8'')$ 🚺 30mm 72mm 🛽 30mm 64mm 0 0 0 0 (] 3/16") (1 3/16") $(2^{1}/2'')$ (2 7/8")




FINISHES Coat Options Satin © Polished • Natural Steel • Brass Toned • Matte Brass Toned • Antique Brass® • Bronzed® • Oil Rubbed • Waxed • Flint® See page 16 for details

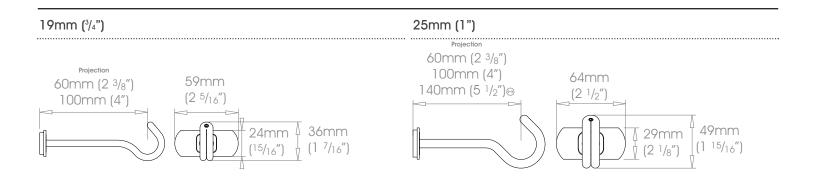


38mm (1¹/₂") 50mm (2") Projection Projection 84mm 84mm 100mm (4") 100mm (4") (3 5/16") (3 5/16") 4 34mm 34mm Ą 64mm 72mm (1 5/16") $(2^{1/2''})$ (1 5/16") (2 7/8") 4



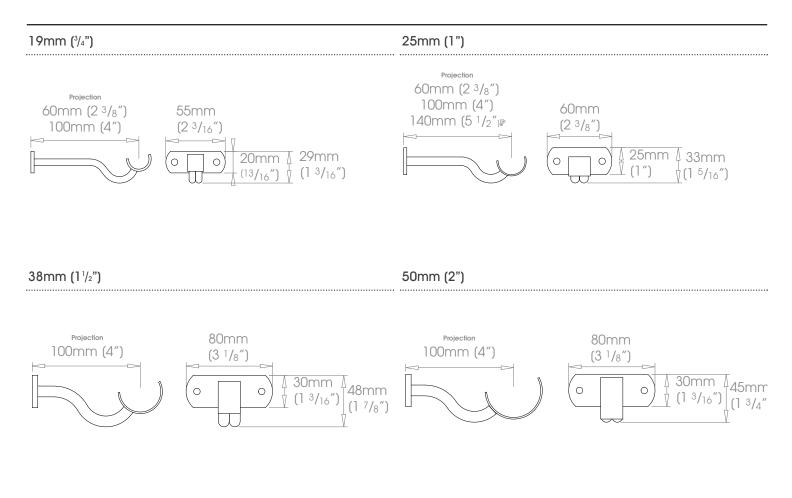




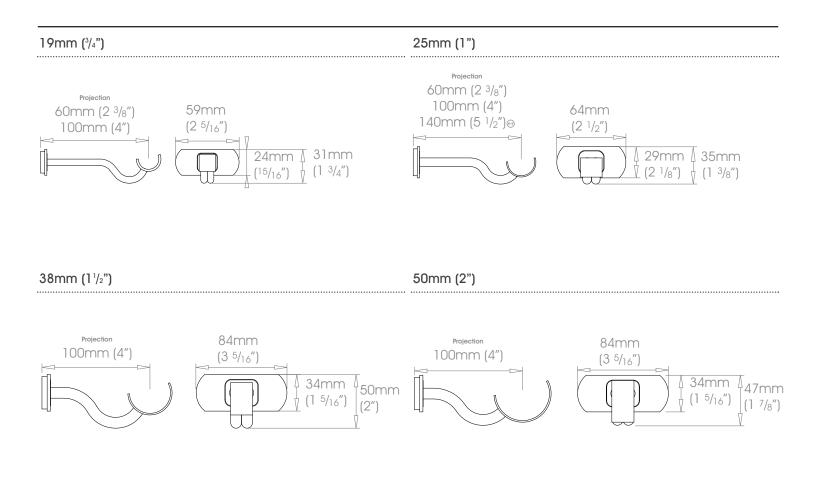




FINISHES Coat Options Satin © Polished • Natural Steel • Brass Toned • Matte Brass Toned • Antique Brass® • Bronzed® • Oil Rubbed • Waxed • Flint® See page 16 for details

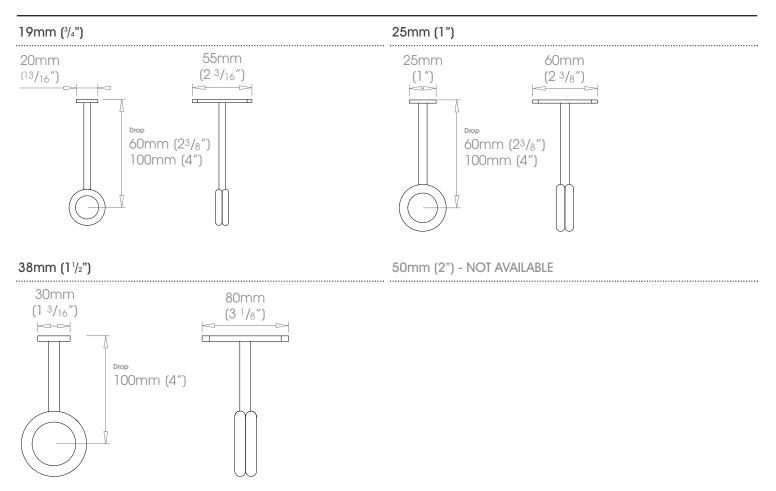



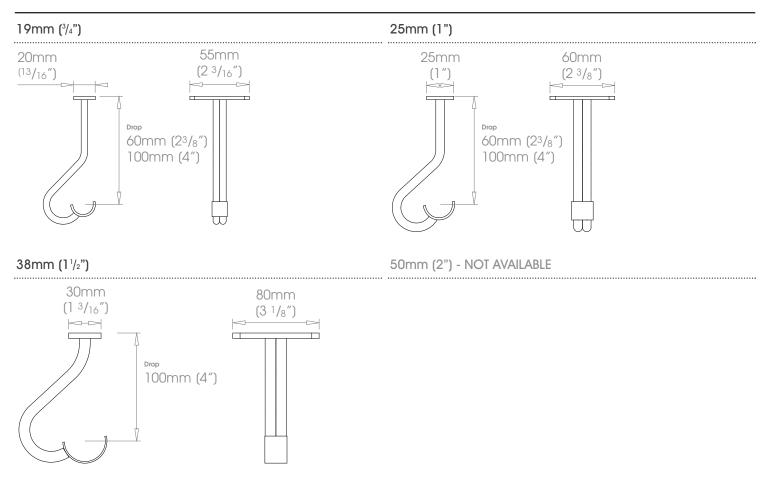





(!) Recess brackets are not suitable for use with French pole

FINISHES Coat Options Satin © Satin ©


19mm (³/₄")

25mm (1")






38mm (1¹/2")

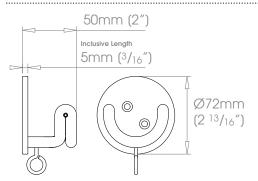


50mm (2")

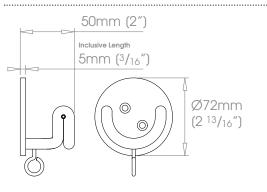





25mm (1")

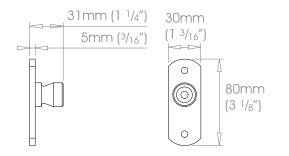




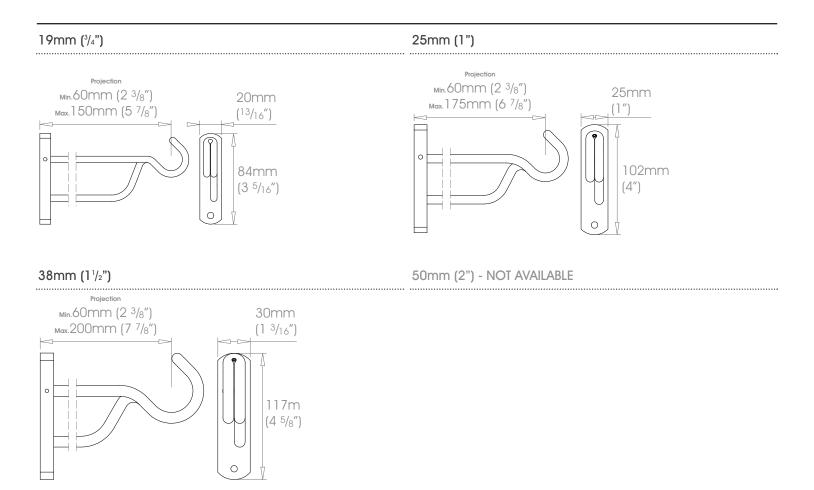



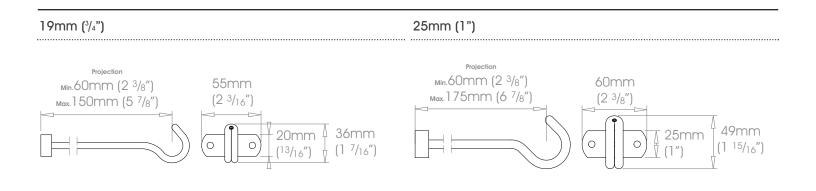



38mm (1¹/2")

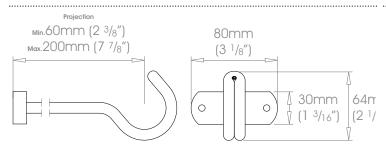


50mm (2") - NOT AVAILABLE



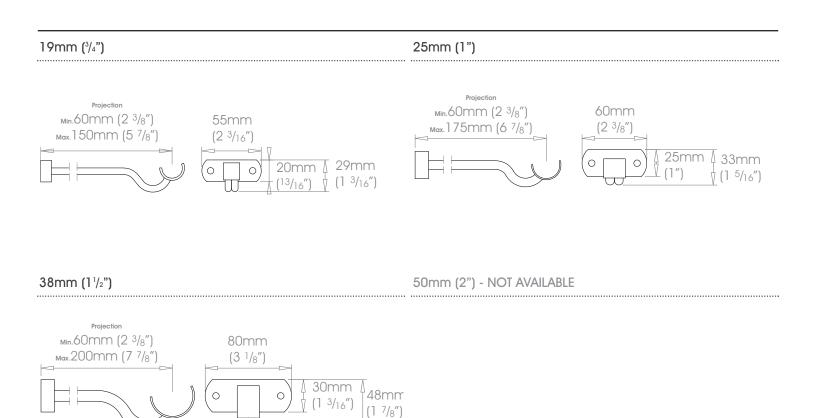


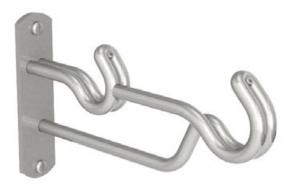

F25mm (1") B19mm (³/₄")

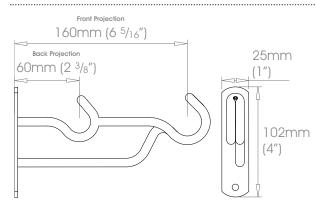


F38mm (1¹/2") в25mm (1")

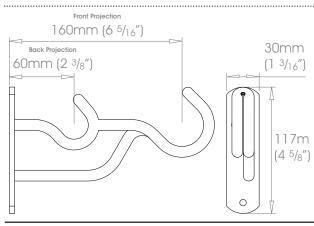




F25mm (1") B19mm (3/4")

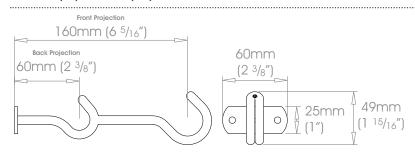


F38mm (1¹/2") в25mm (1")

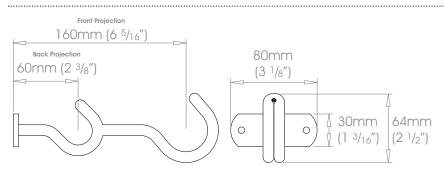




F25mm (1") B19mm (3/4")

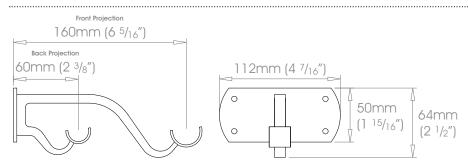


F38mm (1¹/2") в25mm (1")

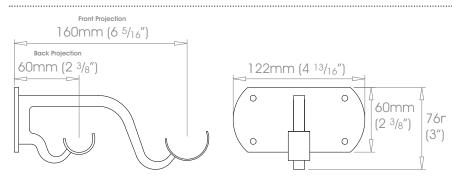





FINISHES Coat Options Satin © Satin ©

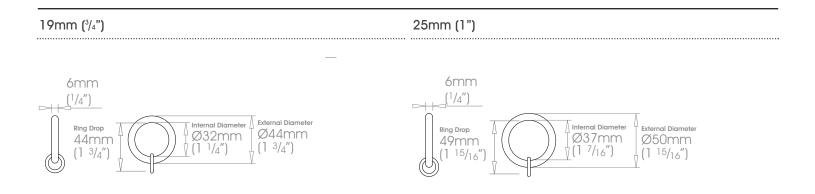

38mm (11/2")

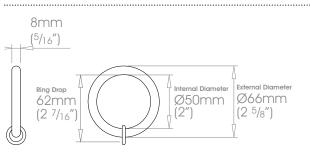

50mm (2")

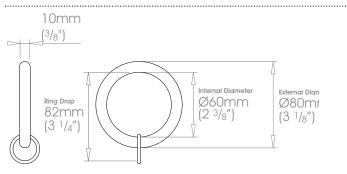




FINISHES Coat Options Satin © Satin ©


19mm (³/4")


25mm (1")

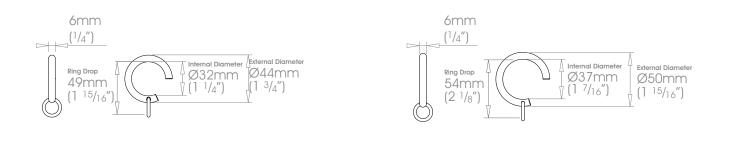


38mm (1¹/2")

50mm (2")

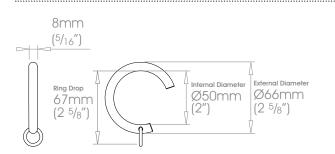


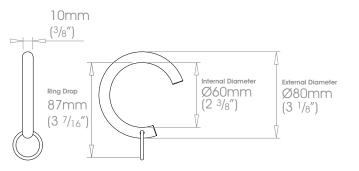


ACCESSORIES

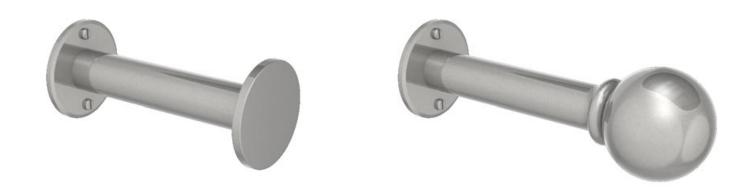

Large Disc

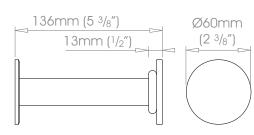


Ball & Collar

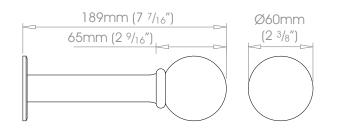





Standard Stud

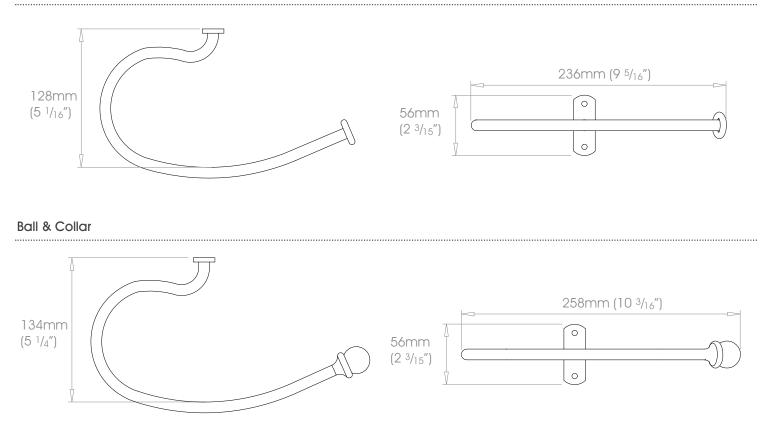







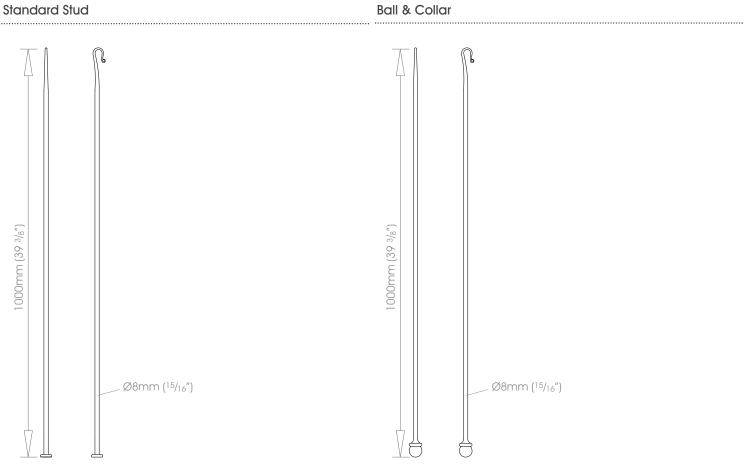






Drapery arms should only be used with Stud or Disc finia Poles should be no longer than 1m (3'4") in length

FINISHES coat options Satin ©

25mm (1")

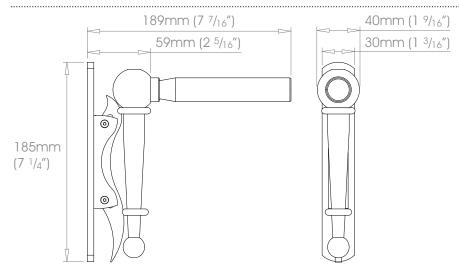



www.bradleycollection.com



UK & REST OF THE WORLD

-

LONDON SHOWROOM

- Hereita (0) 207 871 7793
 Hereita (0) 207
 Hereita (0) 207
- 🛷 showroom@studiotwochelsea.com

USA & CANADA

- 🛷 info.us@bradleycollection.com







Specialised fixings for mounting brackets will be required in certain situations and are not provided as standard. Steel items are not recommended for damp conditions such as shower rooms. Crystal finials should not be positioned in direct sunlight, and are not suitable for use in conservatories. Fluid Metal items are supplied unlacquered and will tarnish over time.

The Bradley Collection reserves the right to modify design and materials without prior notice as part of a process of continual product improvement. Due to printing limitations, colours in this brochure may not be accurate.

Products are protected by Design Rights, under provisions of Copyright, Designs & Patents Act 1988. Bradley®, The Bradley Collection® and 🖉 Logo are registered Community trademarks of The Bradley Collection Ltd. in Europe and registered trademarks of the Bradley Collection, Inc. in the USA.

The Bradley Collection Ltd Lion Barn • Maitland Road • Needham Market • Suffolk • IP6 8NS • UK