

CONTACT

www.bradleycollection.com



UK & REST OF THE WORLD

+44 (0)1449 722 724

info@bradleycollection.com

USA & CANADA

+1 (310) 815 8255

info.us@bradleycollection.com

LONDON SHOWROOM

+44 (0)207 871 7793

showroom@studiotwochelsea.com



⚡ | DRIVE

THE **BRADLEY**
COLLECTION



CEDIA
MEMBER

Specialised fixings for mounting brackets will be required in certain situations and are not provided as standard.
Steel items are not recommended for damp conditions such as shower rooms.
Crystal finials should not be positioned in direct sunlight, and are not suitable for use in conservatories.
Fluid Metal items are supplied unlacquered and will tarnish over time.

The Bradley Collection reserves the right to modify design and materials without prior notice as part of a process of continual product improvement. Due to printing limitations, colours in this brochure may not be accurate.

Products are protected by Design Rights, under provisions of Copyright, Designs & Patents Act 1988.
Bradley®, The Bradley Collection® and  Logo are registered Community trademarks of The Bradley Collection Ltd. in Europe and registered trademarks of the Bradley Collection, Inc. in the USA.

The Bradley Collection Ltd Lion Barn • Maitland Road • Needham Market • Suffolk • IP6 8NS • UK

Printed: 1023 • Copyright © The Bradley Collection Ltd. 2023



⚡ | DRIVE

Innovative and exciting, Drive brings curtain poles firmly into the modern era. A full round pole style, a seamless look and a solution for any shape of window; all driven by your choice of drive and control.

DRIVE | THE NEW STANDARD

Pictured: Round ø38mm (1½") ⚡Pole • Ellipse • Glimmer

LEADING MOTOR OPTIONS

Drive may be specified with your choice of motors from the leading brands. This provides power and control options ranging from standalone battery powered systems to fully integrated home automation solutions.



SEAMLESS INNOVATION

The motor is turned through 90 degrees and rear-mounted via an embedded motor housing, finished in a complementary colour. The motor sits neatly and discreetly behind the drapes.




GLIDING

Gypsum & Anthracite material now offered as standard for gliders, with coated metal gliders available for an exact colour match.



MODERN

Modern sinuous heading styles can be created, using both hook and tape or snap tape components.

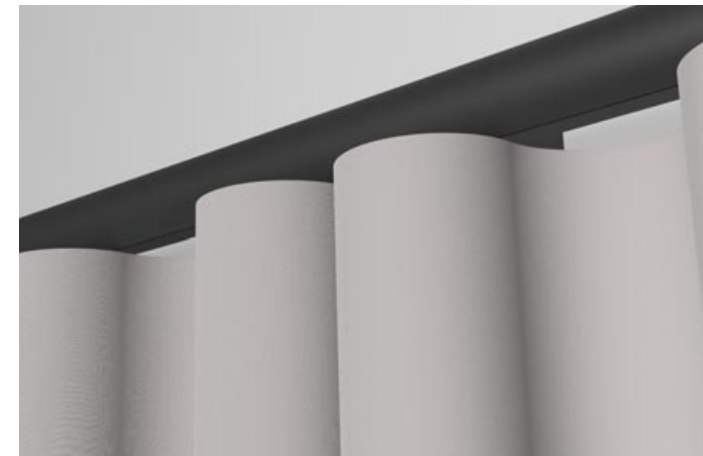


UNOBTRUSIVE

The bracket architecture is shared with Glide and Float and keeps the front face of the pole clear of visible parts.



PRECISE

A new jointing system ensures perfect alignment between pole sections.

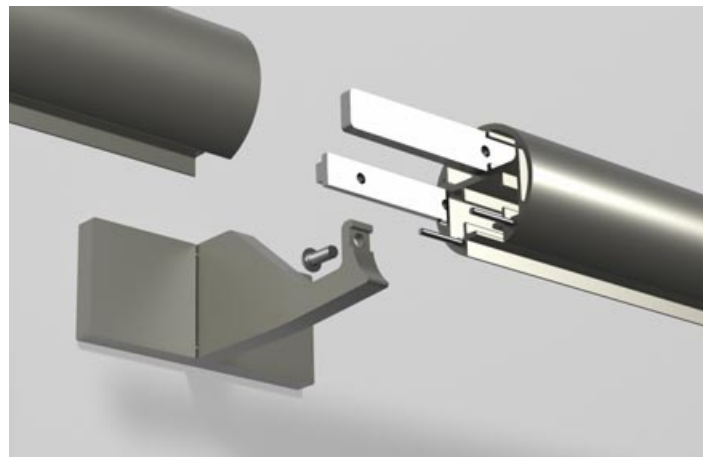

FLUSH

The rear fixing brackets allow true flush ceiling mount for the first time.



BENT TO SHAPE

The pole is designed to be accurately bent and curved to shape.



FINISHES

This stunning palette of colours and finishes is available on all Gliderpoles and components, with a choice of coat options throughout.

SHADES

A superb selection of opaque colours, all available in a choice of Matte, Satin or Gloss finish.



Cloud ^M ^S ^G	Alabaster ^M ^S ^G	Bone ^M ^S ^G	Barley ^M ^S ^G	Dusk ^M ^S ^G	Ceramic ^M ^S ^G
Cream ^M ^S ^G	Mineral ^M ^S ^G	Dove ^M ^S ^G	Parchment ^M ^S ^G	Oatmeal ^M ^S ^G	Millstone ^M ^S ^G
Stone ^M ^S ^G	Clay ^M ^S ^G	Grey Moss ^M ^S ^G	Slate ^M ^S ^G	Cocoa ^M ^S ^G	Moss ^M ^S ^G
Damson ^M ^S ^G	Smoke ^M ^S ^G	Frame Grey ^M ^S ^G	Lead ^M ^S ^G	Earth ^M ^S ^G	Burnt Ash ^M ^S ^G
Flint ^M ^S ^G	Charcoal ^M ^S ^G	Raven ^M ^S ^G			

METALLICS

High metallic fleck coatings with most available in Satin and Gloss sheen levels.

Platinum ^S ^G	Champagne ^S ^G	Gold ^S ^G
Cognac ^S ^G	Antique Brass ^S ^G	Gunmetal ^S ^G
Bronzed ^S ^G	Pewter ^S ^G	

ANODIC METALS

A flat metal colour group, with an anodised style surface texture.

Twilight	Glow	Sky
Sunrise	Storm	Glimmer
Sunset	Night Sky	Midnight

Pictured left to right:
ø38mm (1½”) Pole | Spheric • Charcoal - Matte | Orbic
Grand • Stone - Matte | Seamless • Lead - Matte
Tulip • Moss - Matte | Planar • Earth - Matte



Pictured:
 ø38mm (1½") ⚡ Pole • Seamless • Charcoal - Satin

FINIALS

The fused ends of Drive embody the seamless design language of the collection. Drive is presented with a Seamless end cap as standard, giving the ultimate in clean minimalism.

The fused ends also allow understated geometric finial forms to be added for a hint of decorative detail.



Seamless® Supplied as standard
 ø38mm (1½") Inclusive Length 5mm (¼")



Orbic
 ø38mm (1½") Inclusive Length 15mm (⅝")



Orbic Grand
 ø38mm (1½") Inclusive Length 15mm (⅝")



Drum
 ø38mm (1½") Inclusive Length 23mm (⅞")



Tulip
 ø38mm (1½") Inclusive Length 43mm (1⅞")



Oblique
 ø38mm (1½") Inclusive Length 23mm (⅞")



Planar
 ø38mm (1½") Inclusive Length 29mm (1⅞")






Ellipse
 ø38mm (1½") Inclusive Length 33mm (1⅝")






Spheric
 ø38mm (1½") Inclusive Length 65mm (2⅝")

● Please note that if this option is selected finials cannot be added at a later date.
 For full technical information, sizes and weights please download the specification guide - www.bradleycollection.com/specification-guides/


SINGLE BRACKETS

Side 	Diameter ø38mm (1½")	Projection from wall to pole centre 100mm (4")	Fixing plate size w38mm (1½") x h89mm (3½")
Mid 	Diameter ø38mm (1½")	Projection from wall to pole centre 100mm (4")	Fixing plate size w89mm (3½") x h38mm (1½")
Flush 	Diameter ø38mm (1½")	Drop from ceiling to top of pole 1mm (⅙")	Fixing plate size w70mm (2¾") x h30mm (1⅜")

DOUBLE BRACKETS






Side 	Diameter Fø38mm (1½") Bø38mm (1½")	Projection from wall to pole centre F200mm (8") B100mm (4")	Fixing plate size w57mm (2¼") x h114mm (4½")
Mid 	Diameter Fø38mm (1½") Bø38mm (1½")	Projection from wall to pole centre F200mm (8") B100mm (4")	Fixing plate size w114mm (4½") x h57mm (2¼")
Flush Partition 	Diameter Fø38mm (1½") Bø38mm (1½")	Drop from ceiling to top of pole 1mm (⅙")	Fixing plate size w89mm (3½") x h38mm (1½")

RECESS BRACKETS

Recess with hook stop 	Diameter ø38mm (1½")	Depth off wall 10mm (⅜")	Fixing plate size ø48mm (1⅞")
---	-------------------------	-----------------------------	----------------------------------

CUSTOM BRACKETS

A bespoke design service is offered to ensure solutions in even the most challenging installations.

				
Custom Projection Specify the exact projection needed.	Custom Fixing Plate Relevant where space is restricted or weight is a concern.	Uplift Helps negotiate cornice and similar architectural features.	Ceiling Brackets Specify exact projection required from ceiling.	Angled Brackets The solution for tight and awkward locations.

SYSTEMS

Electric double pole systems may be specified with a **DRIVE** pole to front and rear.

It is also possible to specify a motor to the main curtain and a manual pole to the rear. Simply select **DRIVE** for the front pole and either **GLIDE** Ø30mm (1⅜") or 38mm (1½") for the rear.



⚡ DRIVE

LUTRON® SIVOIA

Low voltage concealed motors
Three motor ratings for differing curtain weights
Quiet motors, noise level at 1000mm (3') <44dBA
Fully compatible with Lutron® QS Home Automation systems
Wireless remote control, app control or home automation integration

MOTOR OPTIONS

⚡ Motor



D105 • D145 • D175
Mains powered motor options.
Requires professional installation.
Suitable for systems up to 15M (49ft).

⚡ Motor
with radio dongle



D105 • D145 • D175
Mains powered motor options , with radio
dongle for use with remote control options.
Requires professional installation.
Suitable for systems up to 15M (49ft).

CONTROL OPTIONS

Remote Control



Single hand held remote control
option available.

App Control
RA2 Select Hub



The system can be controlled with the Lutron
app or through smart devices & Amazon
Alexa.

Automation systems



The system can also be intergrated with all
major home control systems.Ⓐ

⚡ Mains Power | Ⓐ Specialist support & additional components required
Weight restrictions apply. For full technical information please refer to the specification guide. www.bradleycollection.com/specification-guides/

SOMFY® GLYDEA, IRISMO & MOVELITE

Mains & Battery powered motor options
Touch and go manual operation
System allows manual operation during power failure
Quiet motors, noise level at 1000mm (3') <44dBA
Fully compatible with Somfy RTS
Wireless remote control, app control or home automation integration

MOTOR OPTIONS

⚡ Glydea Ultra 60e



WT • RTS
Mains powered motor.
RTS includes integrated radio receiver
for use with remote control options.
Requires professional installation.
Suitable for systems up to 12M (39ft).

🔋 Irismo 45 WF



RTS
Battery powered motor, with
integrated radio receiver for use
with remote control options.
Single charge lasts up to six months.
Requires no pre-wiring.
Suitable for systems up to 10M (33ft).

⚡ Movelite 35



WT • RTS
Mains powered motor.
RTS includes integrated radio receiver
for use with remote control options.
Requires professional instalation.
Suitable for systems up to 10M (33ft).

CONTROL OPTIONS

Remote Control



Single channel & Multi-channel hand held
remote control options available.

App Control
Tahoma



The system can be controlled with the Somfy
Tahoma app or through smart devices &
Amazon Alexa.

Automation systems



The system can also be intergrated with all
major home control systems.Ⓐ

⚡ Mains Power | 🔋 Battery Power | Ⓐ Movelite35 WF is not suitable for bay bends | Ⓐ Specialist support & additional components required
Weight restrictions apply. For full technical information please refer to the specification guide. www.bradleycollection.com/specification-guides/

SILENT GLISS® 5600

Smooth, silent and powerful motors
DC & AC hidden motor options
Touch and go manual operation
System allows manual operation during power failure
Quiet motors, noise level at 300mm (1') <36dBA
Wireless remote control, app control or home automation integration

MOTOR OPTIONS

⚡ 9060 Motor



Mains & low voltage powered motor option.
Requires professional installation.
Suitable for systems up to 15M (49ft).
Three colour options: White • Silver • Black

⚡ 9060 Motor with radio module



Mains powered motor, with radio module for use with remote control options.
Requires professional installation.
Suitable for systems up to 15M (49ft).
Three colour options: White • Silver • Black
Smart Expansion Module® also available.

CONTROL OPTIONS

Remote Control



Single & Multi-channel hand held remote control options available.

App Control Move



The system can be controlled with the Silent Gliss Move® app to allow control on smart devices.

Automation systems



The system can also be intergrated with all major home control systems, and via Silent Gliss Smart® system allowing two way integration with all major home control systems®



⚡ Mains Power | ® Move server set 9960 is required for use with this app | ® Smart only available in United Kingdom, requires Smart Expansion Module | ® Specialist support & additional components required | Weight restrictions apply. For full technical information please refer to the specification guide. www.bradleycollection.com/specification-guides/

GLIDING OPTIONS

Glider



Drop from bottom of track:
15mm (5/8")

Colour Options:
Gypsum • Anthracite

Metalcoat Glider®



Drop from bottom of track:
15mm (5/8")

Colour Options:
System Colour ® • Brushed Nickel

Roller



Drop from bottom of track:
15mm (5/8")

Colour Options:
White • Black

Sine Glider



Drop from bottom of track:
15mm (5/8")

Sine Pitch:
80mm (3 1/8")

Colour Options:
Gypsum • Anthracite

Metalcoat Sine Glider®



Drop from bottom of track:
15mm (5/8")

Sine Pitch:
80mm (3 1/8")

Colour Options:
System Colour ® • Brushed Nickel

Ripple Roller



Drop from bottom of track:
15mm (5/8")

Ripple Pitch:
80mm (3 1/8")

Colour Options:
White • Black

Ripplefold Roller



Drop from bottom of track:
15mm (5/8")

Ripplefold® Fullness:
80% • 100% • 120%

Colour Options:
White

® Metalcoat Gliders, supplied in satin finish on Matte & Gloss finished systems

POLES

Poles are cut, bent and curved to suit individual requirements.
When calculating the length of your pole, remember to allow tolerance beyond the width of the frame for the curtains to stack back to the edge of the window.

Maximum pole length in one piece 4.0m (157").®

Poles exceeding the maximum length will be cut into equal parts unless otherwise specified. A pole joiner will be supplied.



Diameter
ø38mm (1 1/2")

Maximum distance between brackets
1000mm (39")

Minimum bend radius
R400mm (16")

For full technical information, sizes and weights please download the specification guide - www.bradleycollection.com/specification-guides/