



⚡ I DRIVE(2)


Innovative and cutting edge, Drive 2 redefines electrically operated curtain poles. An evolution of previous designs, it combines a full round profile with clean, modern lines and tailored solutions for every shaped window - all powered by the world's leading motor brands.

Powered Precision. Redefined Design

Pictured: ø38mm (1½") ⚡Drive Pole • Powered by Lutron • Planar Drive Rings • Antique Brass - Satin


LEADING MOTOR OPTIONS

Drive can be paired with motors from the world's leading brands, offering solutions from discreet battery operation to fully integrated home automation.

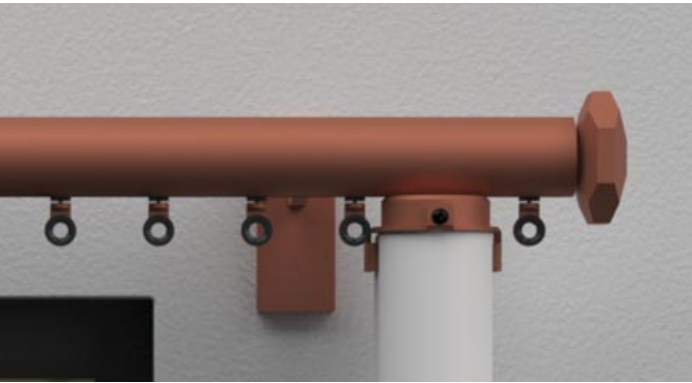

PRECISE JOINING

A smart jointing system ensures perfect alignment between pole sections.

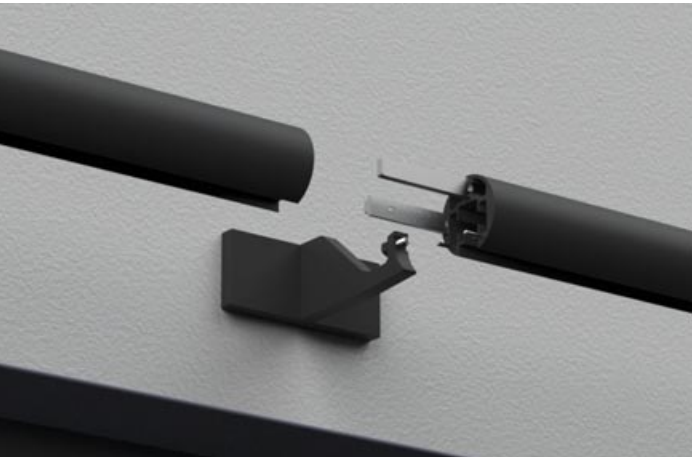

MOTOR ADAPTOR

For optimal curtain appearance, motors may be positioned either in-line (*for standard pleated headings*) or at 90 degrees to the pole (*for wave-shaped or Ripplefold headings*).



BENT TO SHAPE

Drive profile can be accurately bent and curved to shape, with optional adjustable brackets, delivering installation flexibility.



METALCOAT DETAILING

Gliders are offered in Gypsum & Anthracite as standard, with coated metal options available for an exact colour match. A low-friction coating supports improved roller design, offering quieter running.




FLUSH CEILING

The rear-fixed bracket is engineered to achieve true flush ceiling installation.



RINGS

For a decorative finish, rings are available, moved by the master carrier. Sinuous heading style with rings also offered. Bracket architecture ensures the front face of the pole remains clear of visible parts, completing the look.

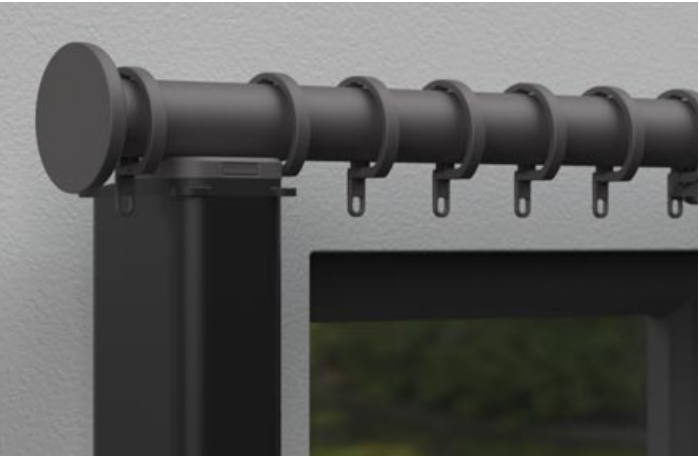

MODERN HEADINGS

Modern sinuous heading styles can be created, using both hook and tape or snap tape components.



FINISHES

This stunning palette of colours and finishes is available on all Drive poles and components, with a choice of coat options throughout.

SHADES

A superb selection of opaque colours, all available in a choice of Matte, Satin or Gloss finish.

					
Cloud	Alabaster	Bone	Barley	Dusk	Mineral
					
Cream	Dove	Parchment	Millstone	Oatmeal	Stone
					
Clay	Grey Moss	Cocoa	Moss	Lead	Earth
					
Smoke	Frame Grey	Burnt Ash	Flint	Charcoal	Raven

ORGANICS

A textured finish, inspired by nature.



			
Ash Stone	Sand Stone	Iron	Obsidian

COAT OPTIONS



METALLICS

High metallic fleck coatings. Available in Satin and Gloss sheen levels.

		
Platinum	Champagne	Gold
		
Cognac	Antique Brass	Gunmetal
		
Bronzed	Pewter	

ANODICS

A flat metal colour group, with an anodised style.

		
Twilight	Glow	Sky
		
Sunrise	Storm	Glimmer
		
Sunset	Night Sky	Midnight

Pictured left to right:
ø38mm (1½") Pole | Spheric • Charcoal - Matte | Orbic Grand • Stone - Matte | Seamless • Lead - Matte
Tulip • Moss - Matte | Planar • Earth - Matte

DRIVE (2)



Pictured: ø38mm (1½") ⚡ Drive Pole • Powered by Lutron
Drum • Metalcoat Rollers • Burnt Bronze

CERAMICS

CERAKOTE®

Finished with ceramic Cerakote for industry leading protection and a flawless finish that endures daily life.

		
Frost ⊕⊕	Titanium ⊕⊕	Tungsten ⊕⊕
		
Electrum ⊕⊕	Golden Quartz ⊕⊕	Burnt Bronze ⊕⊕
		
Midnight Bronze ⊕⊕	Serpentine ⊕⊕	Blue Titanium ⊕⊕
		
Copper ⊕⊕	Cobalt ⊕⊕	Graphite Black ⊕⊕

⊕ A finishing charge will apply | ⊕ Not available with Drive rings

CHROMATICS


Brushed and etched aluminium, elevated with modern tints. Understated luxury with an architectural edge.

Sealed in a clear ceramic coating for durability.


CERAKOTE®

Pictured: ø38mm (1½”) ⚡Drive Pole • Powered by Silent Gliss • Orbic • Metalcoat Rollers • Etched Brass

⚡DRIVE(2)

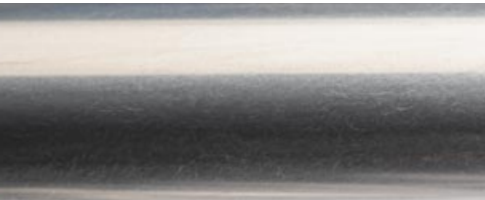


Burnished Aluminum ☉☉

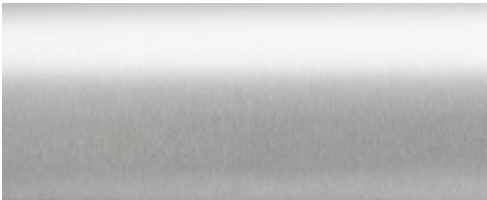

Matte Aluminum ☉☉



Satin Aluminum ☉☉

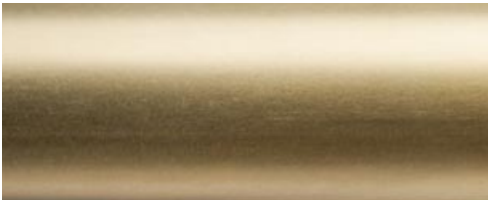


Burnished Brass ☉☉




Soft Brass ☉☉




Etched Brass ☉☉

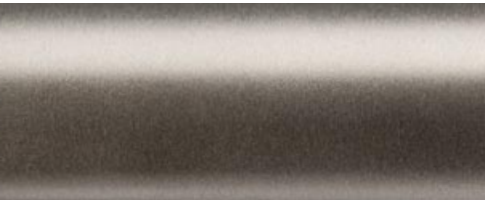


Etched Graphite ☉☉

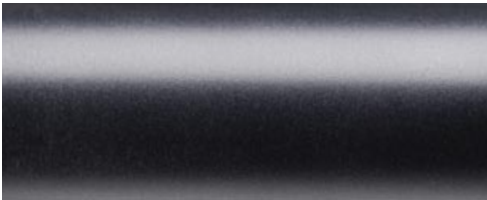


Etched Black ☉☉

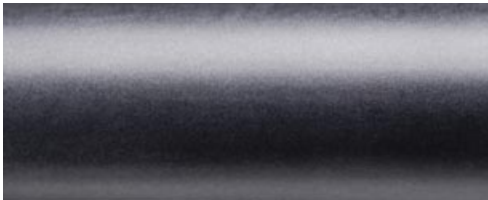


Soft Black ☉☉

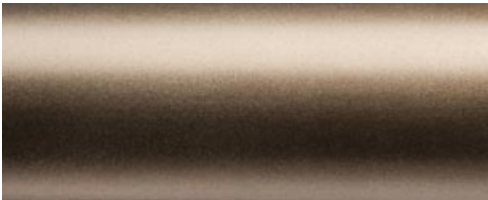

Burnished Bronze ☉☉

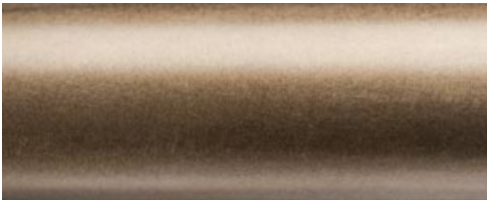

Soft Bronze ☉☉

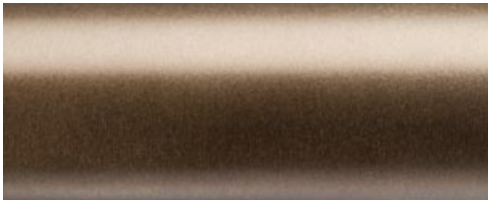

Etched Bronze ☉☉

☉ A finishing charge will apply | ☉ Not available with Drive rings
Due to printing limitations colours in this brochure may not be accurate. Samples are available on request - www.bradleycollection.com/samples/



Pictured: ø38mm (1½") ⚡ Drive Pole • Powered by Somfy • Seamless • Metalcoat Rollers • Charcoal - Satin

FINIALS

The integrated ends embody seamless design. Supplied as standard, Seamless end caps create clean, minimalism, while geometric finials offer understated decorative accents.



Seamless® *Supplied as standard*

ø38mm (1½") Inclusive Length 5mm (¾")



Orbic

ø38mm (1½") Inclusive Length 15mm (¾")



Orbic Grand

ø38mm (1½") Inclusive Length 15mm (¾")



Drum

ø38mm (1½") Inclusive Length 23mm (7⁄8")



Tulip

ø38mm (1½") Inclusive Length 43mm (1⅞")



Oblique

ø38mm (1½") Inclusive Length 23mm (7⁄8")



Planar

ø38mm (1½") Inclusive Length 29mm (1⅛")



Ellipse

ø38mm (1½") Inclusive Length 33mm (1⅝")



Spheric

ø38mm (1½") Inclusive Length 65mm (2⅝")

© Please note that if this option is selected finials cannot be added at a later date.
For full technical information, sizes and weights please download the specification guide - www.bradleycollection.com/downloads/

BRACKET OPTIONS

SINGLE *For straightforward applications.*

Side 	Diameter ø38mm (1½")	Projection from wall to pole centre 100mm (4")	Fixing plate size w38mm (1½") x h89mm (3½")
Mid 	Diameter ø38mm (1½")	Projection from wall to pole centre 100mm (4")	Fixing plate size w89mm (3½") x h38mm (1½")
Flush Ceiling 	Diameter ø38mm (1½")	Drop from ceiling to top of pole 1mm (⅙")	Fixing plate size w70mm (2¾") x h30mm (1⅜")
Ceiling <i>For systems with Rings</i> 	Diameter ø38mm (1½")	Drop from ceiling to top of pole 7mm (¼")	Fixing plate size w70mm (2¾") x h30mm (1⅜")

RECESS *Designed for rebates.*

Recess <i>With hook stop</i> 	Diameter ø38mm (1½")	Depth off wall 10mm (⅜")	Fixing plate size ø48mm (1⅞")
---	--	--	---

ADJUSTABLE *Designed to give flexibility during installation.*

Side 	Diameter ø38mm (1½")	Projection from wall to pole centre Min.90mm (3⅝") Max.110mm (4⅝")	Fixing plate size w46mm (1⅞") x h89mm (3½")
Mid 	Diameter ø38mm (1½")	Projection from wall to pole centre Min.90mm (3⅝") Max.110mm (4⅝")	Fixing plate size w89mm (3½") x h38mm (1½")

DOUBLE *Designed for layered shading.*

Side 	Diameter Fø38mm (1½") Bø38mm (1½") <i>Optional Drive + Glide/Float System</i> Fø38mm (1½") Bø30mm (1⅜") Fø38mm (1½") Bø38mm (1½")	Projection from wall to pole centre F200mm (8") B100mm (4") F160mm (6⅝") B60mm (2⅜") F160mm (6⅝") B60mm (2⅜")	Fixing plate size w57mm (2¼") x h114mm (4½") w57mm (2¼") x h114mm (4½") w57mm (2¼") x h114mm (4½")
Mid 	Diameter Fø38mm (1½") Bø38mm (1½") <i>Optional Drive + Glide/Float System</i> Fø38mm (1½") Bø30mm (1⅜") Fø38mm (1½") Bø38mm (1½")	Projection from wall to pole centre F200mm (8") B100mm (4") F160mm (6⅝") B60mm (2⅜") F160mm (6⅝") B60mm (2⅜")	Fixing plate size w114mm (4½") x h57mm (2¼") w114mm (4½") x h57mm (2¼") w114mm (4½") x h57mm (2¼")
Flush Partition 	Diameter Fø38mm (1½") Bø38mm (1½")	Drop from ceiling to top of pole 1mm (⅙")	Fixing plate size w89mm (3½") x h38mm (1½")
Partition <i>For systems with Rings</i> 	Diameter Fø38mm (1½") Bø38mm (1½")	Drop from ceiling to top of pole 7mm (¼")	Fixing plate size w89mm (3½") x h38mm (1½")

CUSTOM BRACKETS *Designed to suit any window.* ⚙️

Custom Projection 	Custom Fixing Plate 	Uplift 	Ceiling Brackets 	Angled Brackets 
Specify the exact projection needed.	Relevant where space is restricted or weight is a concern.	Helps negotiate cornice & similar architectural features.	Specify exact drop required from ceiling.	The solution for tight and awkward locations.

GLIDING OPTIONS

Glider



For standard headings.

DropⓄ: 15mm (5/8")
Colour Options: Gypsum • Anthracite

Roller



For standard headings.

DropⓄ: 15mm (5/8")
Colour Options: Gypsum • Anthracite

Metalcoat Roller®



For standard headings.

DropⓄ: 15mm (5/8")
Colour Options: System ColourⓄ

Sine Glider



For use with wave-style tape.

DropⓄ: 15mm (5/8")
Sine Pitch: 80mm (3 1/8")
Colour Options: Gypsum • Anthracite

Sine Roller



For use with wave-style tape.

DropⓄ: 15mm (5/8")
Sine Pitch: 60mm (2 3/8") • 80mm (3 1/8")
Colour Options: Gypsum • Anthracite

Metalcoat Sine Glider®



For use with wave-style tape.

DropⓄ: 15mm (5/8")
Sine Pitch: 60mm (2 3/8") • 80mm (3 1/8")
Colour Options: System ColourⓄ

Metalcoat Ripplefold Roller®




For use with snap tape.

DropⓄ: 18mm (1 1/16")
Ripplefold® Fullness: 80% • 100%
Colour Options: System ColourⓄ

Ⓞ Glider/Roller drop from bottom of profile to bottom of eyelet • Ripplefold drop from bottom of profile to centre of eyelet.
Ⓞ Metalcoat Gliders, supplied in satin finish on Matte & Gloss finished systems

RING OPTIONS

Drive rings are engineered with acetal rollers and liners for smooth operation and a consistent upright position. By design, they pass brackets flawlessly.

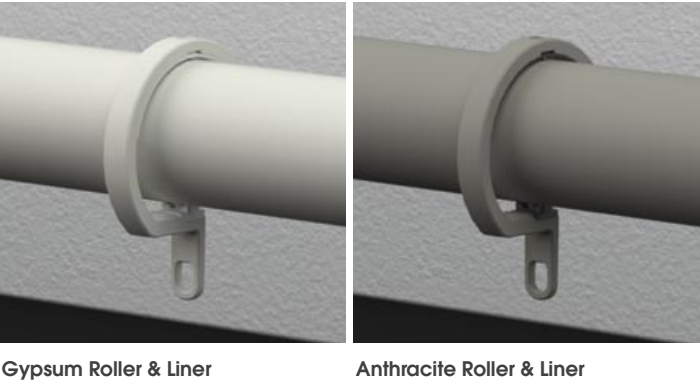

RingⓄ



For standard headings.

Ⓞ38mm (1 1/2") Ring dropⓄ: 62mm (2 7/16")

Sine RingⓄ




For use with wave-style tape.

Ⓞ38mm (1 1/2") Ring dropⓄ: 62mm (2 7/16")
Sine Pitch: 80mm (3 1/8")

POLES

Poles are cut, bent and curved to suit individual requirements. When calculating the length of your pole, remember to allow tolerance beyond the width of the frame for the curtains to stack back to the edge of the window.

Poles exceeding the maximum length will be cut into equal parts unless otherwise specified. A pole joiner will be supplied.



Size	Maximum distance between brackets	Maximum length in one piece	Standard Bend radius
Ⓞ38mm (1 1/2")	1000mm (39")	4000mm (157")Ⓞ	Ⓞ400mm (16")

Double Drive systems may be specified with a motor to front and rear. It is also possible to specify a motor to the main curtain and a manual pole to the rear. Simply specify either **GLIDE** or **FLOAT** Ⓞ30mm (1 3/16") or 38mm (1 1/2") for the rear.



For full technical information, sizes and weights please download the specification guide - www.bradleycollection.com/downloads/

Ⓞ Drive rings not available in Ceramic or Chromatic finishes | Ⓞ Ring drop from top of pole to bottom of ringlet
For finish colour coordination see the specification guide www.bradleycollection.com/downloads/

SYSTEM OPTIONS

Systems can be specified with your preferred motor and control system. Choose drives from Lutron, Somfy or Silent Gliss

POWERED BY



Key features

Power Options: Mains powered

Suitable for Bay Windows: ✓

Touch and go operation: ✗

Manual operation during power failure: ✓

Noise level at 1000mm (3'): <44dBA

Control Options: Lutron® QS Home Wireless Remote & App Control

Home automation systems

MOTOR OPTIONS

⚡ D105



Requires professional installation.

Power Type: Mains power

Control Type: Wired or Remote via Radio dongle

Colour: White

⚡ D145



Requires professional installation.

Power Type: Mains power

Control Type: Wired or Remote via Radio dongle

Colour: White

⚡ D175



Requires professional installation.

Power Type: Mains power

Control Type: Wired or Remote via Radio dongle

Colour: White

CONTROL OPTIONS

Remote Controls
Pico

Single channel hand held remote control options available.



Protocol: Sivoia QS wireless system

Channels: 1

Frequency: 433MHz

Colour: White

App Controls
RA2 Select Hub

Lutron shading systems can be controlled via Lutron App or through smart devices.



Protocol: Sivoia QS wireless system

Compatibility: Alexa • Google Home

Frequency: 433MHz • 868MHz

Colour: Black

Automation systems

The system can also be integrated with all major home control systems.Ⓜ



POWERED BY



Key features

Power Options: Battery & Mains powered

Suitable for Bay Windows: ✓Ⓜ

Touch and go operation: ✓

Manual operation during power failure: ✓

Noise level at 1000mm (3'): <44dBA

Control Options: Wireless & App Control via RTS or Zigbee 3.0

Home automation systems

MOTOR OPTIONS

⚡ Glydea Ultra 60e



Requires professional installation.

Power Type: Mains

Motor Type: WT • RTS • Zigbee 3.0

🔋 Irismo 45 WF



Requires no pre-wiring.

Power Type: Battery

Control Type: RTS

⚡ Movelite 35



Requires professional installation.

Power Type: Mains

Control Type: WT • RTS

🔋 Movelite 35 WFⓂ



Requires no pre-wiring.

Power Type: Battery

Control Type: RTS

CONTROL OPTIONS

Remote Controls
Situo • Ysia

Single channel & Multi-channel hand held remote control options available.



Protocol: RTS

Channels: 1 • 5

Frequency: 433MHz

Colour Options: White

App Controls
Tahoma

Somfy shading systems can be controlled via Tahoma App or through smart devices.



Protocol: RTS • Zigbee 3.0

Compatibility: Alexa • Google Home

Frequency: 433MHz • 868MHz

Colour Options: White

Automation systems

The system can also be integrated with all major home control systems.Ⓜ



SYSTEM OPTIONS

Systems can be specified with your preferred motor and control system. Choose drives from Lutron, Somfy or Silent Gliss

POWERED BY



Key features

Power Options: Mains powered - 100-250 AC and/or 24 V DC in one motor

Suitable for Bay Windows: ✓

Touch and go operation: ✓

Manual operation during power failure: ✓

Noise level at 1000mm (3'): <36dBA

Control Options: Wireless Remote & App Control

Home automation systems via Silent Gliss Smart

MOTOR OPTIONS

⚡ 9060 Motor



Requires professional installation.

Power Type: Mains AC • DC
Control Type: Main power and/or Dry Contact
Colour Options: White • Silver • Black

⚡ 9060 Motor with 11939 Radio module



Requires professional installation.

Power Type: Mains AC • DC
Control Type: SG Control N and/or Dry Contact
Colour Options: White • Silver • Black

⚡ 9060 Motor with 11270 Smart module



Requires professional installation.

Power Type: Mains
Control Type: Home Automation via SG Smart
Colour Options: White • Silver • Black

CONTROL OPTIONS

Remote Controls 11931 • 11932

Single channel & Multi-channel hand held remote control options available.



Protocol: SG Control N
Channels: 1 • 6
Frequency: 433MHz
Colour Options: White • Black

App Control Move 4.0 11900

9060 Motors are controllable via the Silent Gliss Move® app on smart devices.



Protocol: SG Control N
Frequency: 433MHz • 868MHz
Colour Options: Black

Automation systems Silent Gliss Smart

Silent Gliss 9060 motor integrates with major home control systems via SG Smart.®



Protocol: SG Smart
Communication: Two way

⚡ Mains Power | Ⓜ Move server set 9960 is required for use with this app | Ⓢ Smart only available in United Kingdom, requires Smart Expansion Module | Ⓢ Specialist support & additional components required | ⚠ Weight limits apply to gliding type & application. For full technical information please refer to the specification guide. www.bradleycollection.com/downloads/



Pictured: ø38mm (1½") ⚡ Pole • Powered by Lutron • Oblique • Flint - Satin