

CONTACT

www.bradleycollection.com



UK & REST OF THE WORLD

+44 (0)1449 722 724

info@bradleycollection.com

USA & CANADA

+1 (310) 815 8255

info.us@bradleycollection.com

LONDON SHOWROOM

+44 (0)207 871 7793

showroom@studiotwochelsea.com

THE BRADLEY COLLECTION



CEDIA
MEMBER

Specialised fixings for mounting brackets will be required in certain situations and are not provided as standard.
Steel items are not recommended for damp conditions such as shower rooms.
Crystal finials should not be positioned in direct sunlight, and are not suitable for use in conservatories.

The Bradley Collection reserves the right to modify design and materials without prior notice as part of a process of continual product improvement. Due to printing limitations, colours in this brochure may not be accurate.

Products are protected by Design Rights, under provisions of Copyright, Designs & Patents Act 1988.
Bradley® and The Bradley Collection® are registered Community trademarks of The Bradley Collection Ltd. in Europe and registered trademarks of the Bradley Collection, Inc. in the USA.
Gliderpole is a registered trademark of The Bradley Collection Ltd in the UK.

The Bradley Collection Ltd Lion Barn • Maitland Road • Needham Market • Suffolk • IP6 8NS • UK

The Bradley Collection Inc 10866 Washington Blvd #1275 • Culver City • CA 90232 • USA

Printed: 1025 • Copyright © The Bradley Collection Ltd. 2025



EDIT10N

25 | 27



⚡ | ELEVATE

Peerless and opulent, this collection truly has no rival.

A rare, luxurious aesthetic and freedom of expression in design are balanced with the final word in functionality and control.

The world's finest.

Pictured: ø38mm (1½") Coverpole - Lutron • Standard Stud • Matte Brass
Project by: Gallagher London • London SW7 - UK

LEADING MOTOR OPTIONS

Elevate may be specified with motors from the world's leading brands, providing solutions from standalone battery-powered units to complete home automation.



Elevate can be specified with Crestron on request.



For Double pole systems, a hand drawn rear pole may be specified if preferred.



SCALE

Elevate Coverpoles are available in two diameters, Ø38mm (1½”) • 50mm (2”). Finial designs are carefully scaled to maintain the system aesthetic.




DETAILING

The secret of any design is in the detail. Nylon end housings are finished in a complementary colour, for a harmonious tonal effect.




ANY LENGTH

Coverpoles can be supplied to any length[Ⓢ], subject to maximum weight loadings of the selected motorised system.

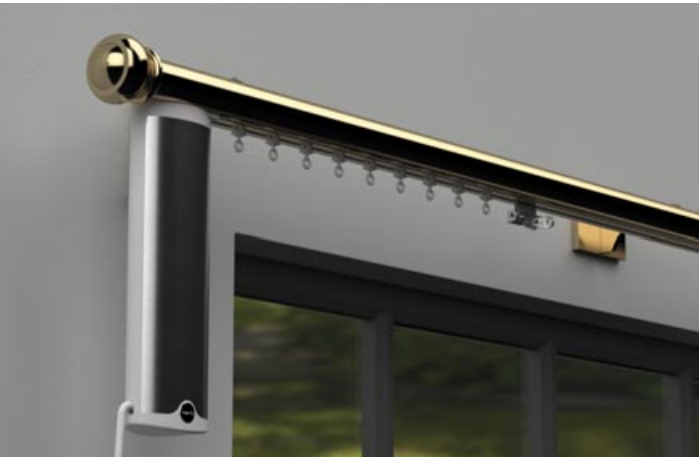

FUNCTION

A range of bracket options has been designed to ensure simple installation, including flush fit ceiling brackets.

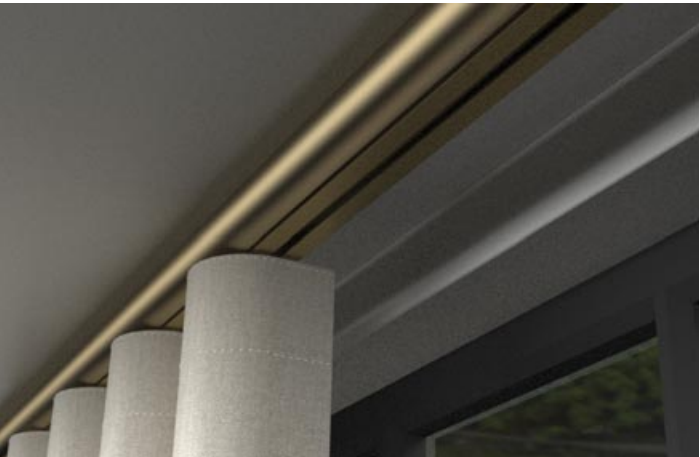

BENT TO SHAPE

A bespoke bay bending service is available on all diameters to allow the perfect shaped pole to fit any bay window.[Ⓢ]



MODERN HEADINGS

The choice of motor systems means that modern headings can be accommodated, with both Wave[®] and Ripplefold[®] styles available.






Pictured: ø38mm (1½") Coverpole - Lutron • Edge Brackets • Mocha Brass

⚡ | ELEVATE

EDGE


Edge is the epitome of understatement, being sleek, discreet and integrated. Available in both metal and wood coverpole options.

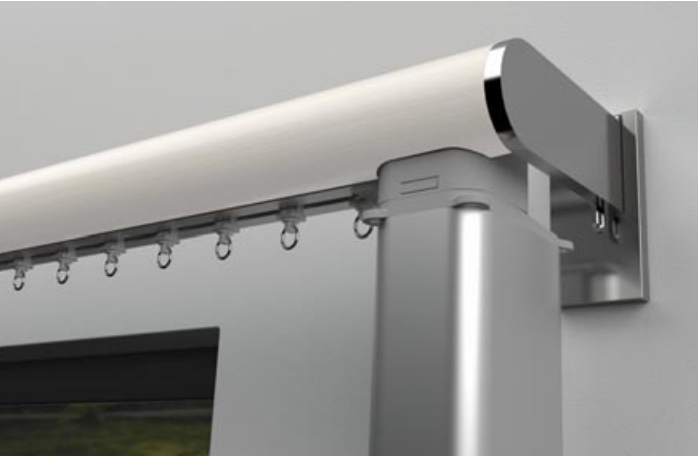

⚡ | ELEVATE

LAYERED SHADING

Double Edge systems are available, allowing layered curtains for privacy and shading control.

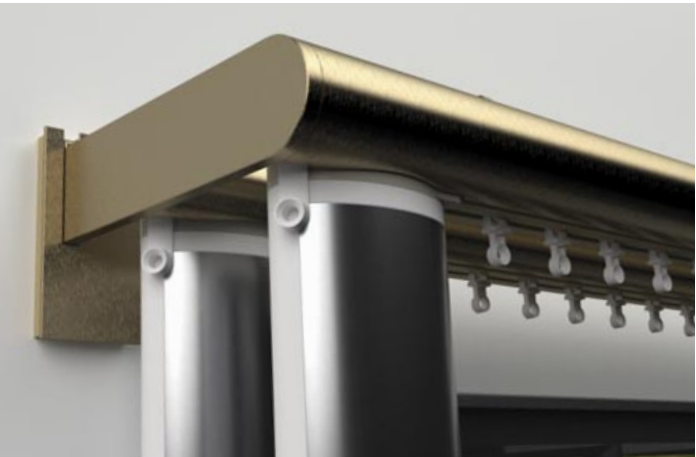

DETAILED TO THE EDGE

The unique Edge bracket design gives a structured return to the wall for curtains and incorporates an adjustable return-to-wall hook eye.



CARBON STEEL

With its dark, lustrous depth, Carbon Steel balances architectural tone with timeless luxury.

304 STAINLESS STEEL

Stainless Steel is known for its strength, purity and enduring appeal. Resistant to corrosion and tarnishing, it ensures lasting performance even in challenging environments.



Pictured: ø38mm (1½”) Coverpole - Somfy • Button Stud • Carbon Steel

Pictured: ø38mm (1½”) Coverpole - Lutron • Faceted Disc • Brushed 304

OIL RUBBED

Deep and dramatic, Oil Rubbed delivers a rich, dark surface, with subtle undertones evoking craftsmanship.

WAXED

Dark finish with a gentle sheen. Waxed steel combines durability with understated refinement.

The soft lustre adds warmth and sophistication to all schemes.

CARBON

Striking in depth, Carbon steel offers a sleek, near-black finish with a contemporary edge.

Minimalist and architectural, it provides a strong design statement.

POLISHED

Highly reflective. Polished 304 Stainless Steel radiates precision and modern luxury.

This finish accentuates clean lines and creates a luminous statement.

MATTE


Matte 304 Stainless Steel softens reflections for a calm, architectural feel.

Its smooth, muted surface makes it a versatile choice across modern interiors.

BRUSHED

Defined by linear texture. Brushed 304 Stainless Steel offers a satin finish that strikes a balance between elegance and practicality.

A timeless finish.

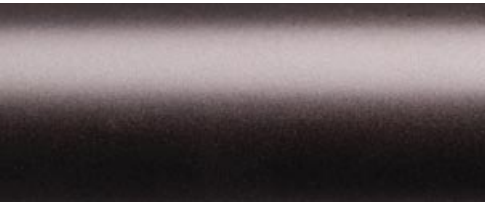

Oil Rubbed Steel



Waxed Steel




Carbon Steel



Polished 304



Matte 304

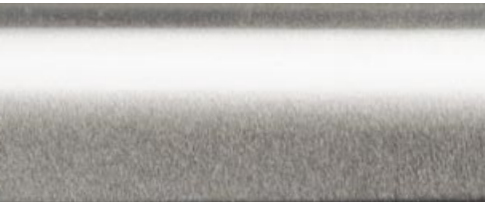

Brushed 304

AUTHENTIC BRASS

Crafted from real, solid brass - a material long associated with heritage, quality and timeless luxury.

Each finish celebrates the natural beauty of brass, from the luminous glow of polished surfaces to the subtle depth of brushed and aged treatments.

Sealed in a clear ceramic coating for durability.




Pictured: ø38mm (1½”) Coverpole - Silent Gliss • Button Stud • Brushed Brass

⚡ ELEVATE

POLISHED BRASS

A timeless, mirror-like finish that radiates luxury. Polished Brass brings a luminous golden tone.

Ideal for interiors that demand refinement and shine.

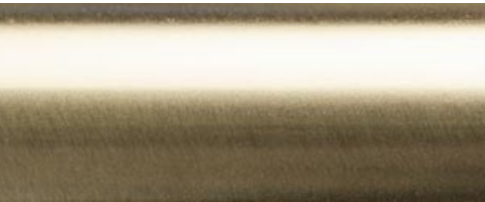

Polished Brass ☉

MATTE BRASS

A contemporary interpretation on brass, with a soft, understated surface that diffuses light beautifully.

Perfect for modern schemes seeking warmth without glare.



Matte Brass ☉

BRUSHED BRASS

The subtle texture of Brushed Brass delivers a sophisticated, tactile finish.

Its satin sheen balances elegance with restraint, making it versatile across styles.



Brushed Brass ☉

AGED BRASS

Rich, mellowed tones that capture the depth and character of time-worn brass.

Aged Brass offers heritage appeal with a luxurious, lived-in quality.



Aged Brass ☉

BRUSHED BRONZE

A darker, brushed brass that exudes strength and warmth.

Brushed Bronze delivers depth and richness, with a soft reflective quality.



Brushed Bronze ☉

MOCHA BRONZE

An indulgent, waxed brass with deep chocolate undertones.

Mocha Bronze offers a refined, modern alternative to traditional dark metals.



Mocha Brass ☉



Pictured: ø50mm (2") Coverpole - Lutron • Walnut | Wooden Contrast Stud • Walnut with Brushed Brass

SOLID WOOD FINISHES

Our solid woods edit celebrates the true character of this organic material.

STAINS


Our curated range of stains enhances the natural beauty of ash, accentuating its grain, while offering distinctive tones from light linen, to the depth of Jet.




Linen ⓘ *Stain over ash*



Honey ⓘ *Stain over ash*

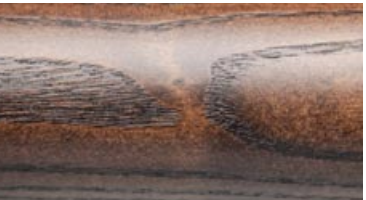

Jacobean ⓘ *Stain over ash*

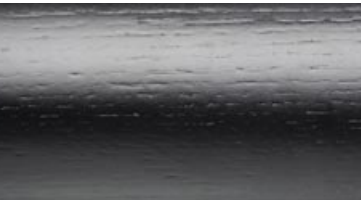

Jet ⓘ *Stain over ash*

NATURALS

When authentic solid wood is required, Naturals celebrates the inherent beauty of Ash, Oak, Cherry & Walnut - each with its own distinctive grain, tone and depth.



Ash ⓘ



Oak ⓘ ⓘ



Cherry ⓘ ⓘ



Walnut ⓘ ⓘ

ⓘ A surcharge will apply | ⓘ Longer lead-times will apply
Due to printing limitations colours in this brochure may not be accurate. Samples are available on request - www.bradleycollection.com/samples/



FINIALS

This design edit provides a versatile solution for any project.

Sharp geometric forms give Elevate a modern persona, while softer rounded details offer a more classic sensibility - reimagined with a contemporary hand.



Flush End Cap® *Supplied as standard*

ø38mm (1½") Inclusive Length 6mm (¼")
ø50mm (2") Inclusive Length 6mm (¼")



Flush Stud *For wooden coverpoles only*

ø50mm (2") Inclusive Length 8mm (⅝")



Contrast Stud

ø38mm (1½") Inclusive Length 20mm (⅞")
ø50mm (2") Inclusive Length 23mm (7⁄8")



Wooden Contrast Stud

ø50mm (2") Inclusive Length 23mm (7⁄8")



Faceted Disc

ø38mm (1½") Inclusive Length 45mm (1¾")
ø50mm (2") Inclusive Length 59mm (2⅝")



Wooden Faceted Disc

ø50mm (2") Inclusive Length 59mm (2⅝")



Ball

ø38mm (1½") Inclusive Length 86mm (3⅜")
ø50mm (2") Inclusive Length 106mm (4⅜")



Wooden Ball

ø50mm (2") Inclusive Length 106mm (4⅜")



Button Stud

ø38mm (1½") Inclusive Length 58mm (2⅝")
ø50mm (2") Inclusive Length 69mm (2⅞")



Wooden Button Stud

ø50mm (2") Inclusive Length 69mm (2⅞")



Ball & Collar

ø50mm (2") Inclusive Length 106mm (4⅜")



Wooden Ball & Collar

ø50mm (2") Inclusive Length 106mm (4⅜")

Pictured: ø38mm (1½") Coverpole - Lutron • Standard Stud • Aged Brass
Interior design: Studio Burgoon • USA | www.studioburgoon.com
Interior design: Lindsay Brown | www.lindsay-brown.com

© Please note that if this option is only available on metal coverpoles. If selected finials cannot be added at a later date.
For full technical information, sizes and weights please download the specification guide - www.bradleycollection.com/downloads/

BRACKET OPTIONS

SINGLE *For straightforward applications.*

		Metal Coverpole Diameter	Projection from wall to track centre	Fixing plate size
		ø38mm (1½")	100mm (4")	w52mm (2⅛") x H104mm (4⅞")
		ø50mm (2")	100mm (4")	w52mm (2⅛") x H104mm (4⅞")
		Wood Coverpole Diameter	Projection from wall to track centre	Fixing plate size
		ø50mm (2")	100mm (4")	w52mm (2⅛") x H104mm (4⅞")
		Metal Coverpole Diameter	Projection from wall to track centre	Fixing plate size
		ø38mm (1½")	100mm (4")	w104mm (4⅞") x H52mm (2⅞")
		ø50mm (2")	100mm (4")	w104mm (4⅞") x H52mm (2⅞")
		Wood Coverpole Diameter	Projection from wall to track centre	Fixing plate size
		ø50mm (2")	100mm (4")	w104mm (4⅞") x H52mm (2⅞")
		Metal Coverpole Diameter	Drop from ceiling to top of pole	Fixing plate size
		ø38mm (1½")	3mm (⅙")	w70mm (2¾") x H34mm (1⅝")
		ø50mm (2")	3mm (⅙")	w70mm (2¾") x H34mm (1⅝")
		Wood Coverpole Diameter	Projection from wall to track centre	Fixing plate size
		ø50mm (2")	100mm (4")	w70mm (2¾") x H34mm (1⅝")

DOUBLE *Designed for layered shading.*

Side		Metal Coverpole Diameter		Projection from wall to track centre		Fixing plate size		
		Fø38mm (1½")	Bø38mm (1½")	F160mm (6⅝")	B 60mm (2⅜")	w52mm (2⅛") x H104mm (4⅞")		
		Fø38mm (1½")	B Uncovered track	F160mm (6⅝")	B 60mm (2⅜")	w52mm (2⅛") x H104mm (4⅞")		
		Fø50mm (2")	Bø38mm (1½")	F160mm (6⅝")	B 60mm (2⅜")	w52mm (2⅛") x H104mm (4⅞")		
		Fø50mm (2")	Bø50mm (2")	F160mm (6⅝")	B 60mm (2⅜")	w52mm (2⅛") x H104mm (4⅞")		
		Fø50mm (2")	B Uncovered track	F160mm (6⅝")	B 60mm (2⅜")	w52mm (2⅛") x H104mm (4⅞")		
		Wood Coverpole Diameter		Projection from wall to track centre		Fixing plate size		
		Fø50mm (2")	Bø50mm (2")	F160mm (6⅝")	B 60mm (2⅜")	w52mm (2⅛") x H104mm (4⅞")		
		Fø50mm (2")	B Uncovered track	F160mm (6⅝")	B 60mm (2⅜")	w52mm (2⅛") x H104mm (4⅞")		
Mid	Mid - Joining	Metal Coverpole Diameter		Projection from wall to track centre		Fixing plate size		
		Fø38mm (1½")	Bø38mm (1½")	F160mm (6⅝")	B 60mm (2⅜")	w104mm (4⅞") x H52mm (2⅞")		
		Fø38mm (1½")	B Uncovered track	F160mm (6⅝")	B 60mm (2⅜")	w104mm (4⅞") x H52mm (2⅞")		
		Fø50mm (2")	Bø38mm (1½")	F160mm (6⅝")	B 60mm (2⅜")	w104mm (4⅞") x H52mm (2⅞")		
		Fø50mm (2")	Bø50mm (2")	F160mm (6⅝")	B 60mm (2⅜")	w104mm (4⅞") x H52mm (2⅞")		
		Fø50mm (2")	B Uncovered track	F160mm (6⅝")	B 60mm (2⅜")	w104mm (4⅞") x H52mm (2⅞")		
		Wood Coverpole Diameter		Projection from wall to track centre		Fixing plate size		
		Fø50mm (2")	Bø50mm (2")	F160mm (6⅝")	B 60mm (2⅜")	w104mm (4⅞") x H52mm (2⅞")		
		Fø50mm (2")	B Uncovered track	F160mm (6⅝")	B 60mm (2⅜")	w104mm (4⅞") x H52mm (2⅞")		

EDGE *A modern interpretation of French returns.*

Single - End👁		Metal Coverpole Diameter	Projection from wall to track centre	Fixing plate size
		ø38mm (1½")	100mm (4")	w52mm (2⅛") x H104mm (4⅞")
		ø50mm (2")	100mm (4")	w52mm (2⅛") x H104mm (4⅞")
		Wood Coverpole Diameter	Projection from wall to track centre	Fixing plate size
		ø50mm (2")	100mm (4")	w52mm (2⅛") x H104mm (4⅞")
Double - End👁👁		Diameter	Projection from wall to pole centre	Fixing plate size
		Fø38mm (1½") Bø38mm (1½")	F160mm (6⅝") B60mm (2⅜")	w52mm (2⅛") x H104mm (4⅞")
		Fø50mm (2") Bø38mm (1½")	F160mm (6⅝") B60mm (2⅜")	w52mm (2⅛") x H104mm (4⅞")
		Fø50mm (2") Bø50mm (2")	F160mm (6⅝") B60mm (2⅜")	w52mm (2⅛") x H104mm (4⅞")
		Wood Coverpole Diameter	Projection from wall to track centre	Fixing plate size
		Fø50mm (2") Bø50mm (2")	F160mm (6⅝") B60mm (2⅜")	w52mm (2⅛") x H104mm (4⅞")

CUSTOM BRACKETS *Designed to suit any window.* ⚙

Custom Projection	Custom Fixing Plate	Uplift	Ceiling Brackets	Angled Brackets
				
Specify the exact projection needed.	Relevant where space is restricted or weight is a concern.	Helps negotiate cornice & similar architectural features.	Specify exact drop required from ceiling.	The solution for tight and awkward locations.



👁 Handed Item - Left and Right version available
⚙ Custom Brackets shown are for illustration purposes. Brackets are designed on a project basis to specific requirements.

POWERED BY



Key features

Power Options: Mains powered

Maximum length: 12 Metres (39ft)Ⓢ

Suitable for Bay Windows: ✓Ⓢ

Header types: Standard, S-Fold and Ripplefold®

Motor Position: In-line or perpendicular to pole

Manual operation during power failure: ✓

Noise level at 1000mm (3'): <44dBA

Control Options: Lutron® QS Home Wireless Remote & App Control Home automation systems

MOTOR OPTIONS

⚡ D105



Requires professional installation.

Power Type: Mains power
Control Type: Wired or Remote via Radio dongle
Maximum length: 9M (29.6ft).
Maximum weight load: 48kg (105lb).⚠
Colour: White

⚡ D145



Requires professional installation.

Power Type: Mains power
Control Type: Wired or Remote via Radio dongle
Maximum length: 9M (29.6ft).
Maximum weight load: 66kg (145lb).⚠
Colour: White

⚡ D175



Requires professional installation.

Power Type: Mains power
Control Type: Wired or Remote via Radio dongle
Maximum length: 12M (39ft).
Maximum weight load: 79kg (175lb).⚠
Colour: White

CONTROL OPTIONS

Remote Controls
Pico

Single channel hand held remote control options available.



Protocol: Sivoia QS wireless system
Channels: 1
Frequency: 433MHz
Colour: White

App Controls
RA2 Select Hub

Lutron shading systems can be controlled via Lutron App or through smart devices.



Protocol: Sivoia QS wireless system
Compatibility: Alexa • Google Home
Frequency: 433MHz • 868MHz
Colour: Black

Automation systems

The system can also be integrated with all major home control systems.Ⓢ



GLIDING OPTIONS


Rollers



For standard headings.

DropⓈ: 12mm (7⁄16")
Colour: White

S-Fold Rollers

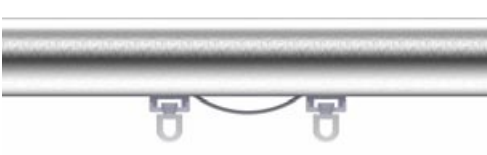

For use with wave-style tape.

DropⓈ: 15mm (5⁄16")
S-Fold Pitch: 60mm (2³⁄8") • 80mm (3¹⁄8")
Colour: White

Ripplefold® Rollers



For use with Graber or Kirsch snap tape.

DropⓈ: 16mm (5⁄8")
Ripplefold® Fullness: 80% • 100% • 120%
Colour: White

Ⓢ Glider/Roller drop from bottom of profile to bottom of eyelet • Ripplefold drop from bottom of profile to centre of eyelet.

COVERPOLE

Poles are cut and bent to suit individual requirements. When calculating the length of your pole, remember to allow tolerance beyond the width of the frame for the curtains to stack back to the edge of the window.

Poles exceeding the maximum length will be cut into equal parts unless otherwise specified. A joining bracket will need to be specified.

Size	Maximum distance between brackets	Maximum length in one piece	Standard Bend radius
ø38mm (1½") Steel • Stainless • Brass	1500mm (60")	2900mm (114")Ⓢ	R275mm (10¹³⁄₁₆")Ⓢ
ø50mm (2") Steel • Stainless • Brass	1500mm (60")	2900mm (114")Ⓢ	R275mm (10¹³⁄₁₆")Ⓢ
ø50mm (2") Wood	1500mm (60")	2400mm (94 ½")	R275mm (10¹³⁄₁₆")

Ⓢ Supplied in sections - maximum section length UK - 2900mm (114³⁄₁₆") • Rest of World 2540mm (100") | Ⓢ 304 Stainless Steel finishes not available with bends

POWERED BY

somfy®

Key features

Power Options: Battery & Mains powered

Maximum length: 12 Metres (39ft)Ⓢ

Suitable for Bay Windows: ✓ⓈⓈ

Header types: Standard, Ripple and Ripplefold®

Touch and go operation: ✓

Manual operation during power failure: ✓

Noise level at 1000mm (3'): <44dBA

Control Options: Wireless & App Control via RTS or Zigbee 3.0 Home automation systems

MOTOR OPTIONS

⚡ Glydea Ultra 60e



Requires professional installation.

Power Type: Mains

Motor Type: WT • RTS • Zigbee 3.0

Maximum length: 12M (39ft).

Maximum weight load: 60kg (132lb).⚠

🔋 Irismo 45 WF



Requires no pre-wiring.

Power Type: Battery

Control Type: RTS

Maximum length: 10M (33ft).

Maximum weight load: 45kg (99lb).⚠

⚡ Movelite 35



Requires professional installation.

Power Type: Mains

Control Type: WT • RTS

Maximum length: 10M (33ft).

Maximum weight load: 35kg (77lb).⚠

🔋 Movelite 35 WFⓈ



Requires no pre-wiring.

Power Type: Battery

Control Type: RTS

Maximum length: 6M (19ft).

Maximum weight load: 35kg (77lb).⚠

CONTROL OPTIONS

Remote Controls

Situo • Ysia

Single channel & Multi-channel hand held remote control options available.



Protocol: RTS

Channels: 1 • 5

Frequency: 433MHz

Colour Options: White

App Controls

Tahoma

Somfy shading systems can be controlled via Tahoma App or through smart devices.



Protocol: RTS • Zigbee 3.0

Compatibility: Alexa • Google Home

Frequency: 433MHz • 868MHz

Colour Options: White

Automation systems

The system can also be integrated with all major home control systems.Ⓢ



GLIDING OPTIONS

Rollers




For standard headings.

DropⓈ: 20mm (13⁄16")

Colour Options: White • Black

Ripple Rollers

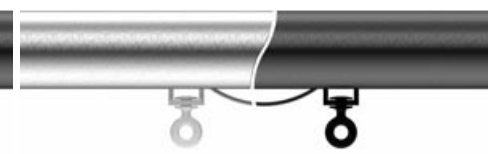


For use with wave-style tape.

DropⓈ: 20mm (13⁄16")

Ripple Pitch: 80mm (31⁄8")

Colour Options: White

Ripplefold® Rollers

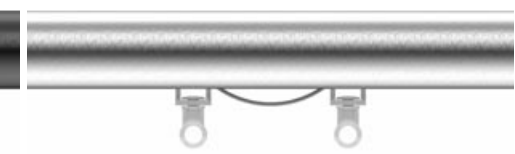

For use with Graber or Kirsch snap tape.

DropⓈ: 18mm (11⁄16")

Ripplefold® Fullness: 80% • 100% • 120%



Colour Options: White

Ⓢ Glider/Roller drop from bottom of profile to bottom of eyelet • Ripplefold drop from bottom of profile to centre of eyelet.

COVERPOLE

Poles are cut and bent to suit individual requirements. When calculating the length of your pole, remember to allow tolerance beyond the width of the frame for the curtains to stack back to the edge of the window.

Poles exceeding the maximum length will be cut into equal parts unless otherwise specified. A joining bracket will need to be specified.

			
Size	Maximum distance between brackets	Maximum length in one piece	Standard Bend radius
ø38mm (1½") Steel • Stainless • Brass	1500mm (60")	2900mm (114")Ⓢ	R275mm (1013⁄16")Ⓢ
ø50mm (2") Steel • Stainless • Brass	1500mm (60")	2900mm (114")Ⓢ	R275mm (1013⁄16")Ⓢ
ø50mm (2") Wood	1500mm (60")	2400mm (94 ½")	R275mm (1013⁄16")

Ⓢ Supplied in sections - maximum section length UK - 2900mm (114³⁄₁₆") • Rest of World 2540mm (100") | Ⓢ 304 Stainless Steel finishes not available with bends

POWERED BY



Key features

Power Options: Mains powered - 100-250 AC and/or 24 V DC in one motor

Maximum length: 25 Metres (82ft) [Ⓢ]

Suitable for Bay Windows: ✓ [Ⓢ]

Header types: Standard & Wave[®]

Motor Position: In-line or perpendicular to pole

Touch and go operation: ✓

Manual operation during power failure: ✓

Noise level at 1000mm (3'): <36dBA

Control Options: Wireless Remote & App Control

Home automation systems via Silent Gliss Smart

MOTOR OPTIONS

⚡ 9060 Motor



Requires professional installation.

Power Type: Mains AC • DC
Control Type: Main power and/or Dry Contact
Maximum length: 25M (82ft).
Maximum weight load: 65kg (143lb). [⬆]
Colour Options: White • Silver • Black

⚡ 9060 Motor with 11939 Radio module



Requires professional installation.

Power Type: Mains AC • DC
Control Type: SG Control N and/or Dry Contact
Maximum length: 25M (82ft).
Maximum weight load: 65kg (143lb). [⬆]
Colour Options: White • Silver • Black

⚡ 9060 Motor with 11270 Smart module



Requires professional installation.

Power Type: Mains
Control Type: Home Automation via SG Smart
Maximum length: 25M (82ft).
Maximum weight load: 65kg (143lb). [⬆]
Colour Options: White • Silver • Black

CONTROL OPTIONS

Remote Controls
11931 • 11932

Single channel & Multi-channel hand held remote control options available.



Protocol: SG Control N
Channels: 1 • 6
Frequency: 433MHz
Colour Options: White • Black

App Control
Move 4.0 11900

9060 Motors are controllable via the Silent Gliss Move[®] app on smart devices.



Protocol: SG Control N
Frequency: 433MHz • 868MHz
Colour Options: Black

Automation systems
Silent Gliss Smart

Silent Gliss 9060 motor integrates with major home control systems via SG Smart.[Ⓢ][Ⓢ]



Protocol: SG Smart
Communication: Two way

GLIDING OPTIONS

Gliders



For standard headings.

Drop[Ⓢ]: 20mm (1³/₁₆")
Colour Options: White


2C Rollers[Ⓢ]



For standard headings.

Drop[Ⓢ]: 20mm (1³/₁₆")
Colour Options: White • Black

Wave[®] Gliders

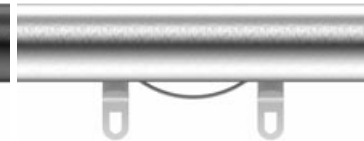

For use with wave-style tape.

Drop[Ⓢ]: 20mm (1³/₁₆")
Wave Pitch: 60mm (2³/₈") • 80mm (3¹/₈")
Colour Options: White

Wave[®] 2C Rollers[Ⓢ]



For use with wave-style tape.

Drop[Ⓢ]: 20mm (1³/₁₆")
Wave Pitch: 60mm (2³/₈") • 80mm (3¹/₈")
Colour Options: White • Black

[Ⓢ] Glider/Roller drop from bottom of profile to bottom of eyelet.

COVERPOLE

Poles are cut and bent to suit individual requirements. When calculating the length of your pole, remember to allow tolerance beyond the width of the frame for the curtains to stack back to the edge of the window.

Poles exceeding the maximum length will be cut into equal parts unless otherwise specified. A joining bracket will need to be specified.

Size	Maximum distance between brackets	Maximum length in one piece	Standard Bend radius
ø38mm (1½") Steel • Stainless • Brass	1500mm (60")	2900mm (114") [Ⓢ]	R275mm (10 ¹³ / ₁₆ ") [Ⓢ]
ø50mm (2") Steel • Stainless • Brass	1500mm (60")	2900mm (114") [Ⓢ]	R275mm (10 ¹³ / ₁₆ ") [Ⓢ]
ø50mm (2") Wood	1500mm (60")	2400mm (94 ½")	R275mm (10 ¹³ / ₁₆ ")

[Ⓢ] Supplied in sections - maximum section length UK - 2900mm (114³/₁₆") • Rest of World 2540mm (100") | [Ⓢ] 304 Stainless Steel finishes not available with bends
[Ⓢ] Supplied as standard on systems over maximum shipping lengths above.