CONTACT

www.bradleycollection.com









UK & REST OF THE WORLD

USA & CANADA

& +44 (0) 1449 722 724

& +1 (310) 815 8255

LONDON SHOWROOM

& +44 (0)207 871 7793

showroom@studiotwochelsea.com





CEDIA MEMBER Specialised fixings for mounting brackets will be required in certain situations and are not provided as standard. Steel items are not recommended for damp conditions such as shower rooms.

The Bradley Collection reserves the right to modify design and materials without prior notice as part of a process of continual product improvement. Due to printing limitations, colours in this brochure may not be accurate.

Products are protected by Design Rights, under provisions of Copyright, Designs & Patents Act 1988.

Bradley® and The Bradley Collection® are registered Community trademarks of The Bradley Collection Ltd. in Europe and registered trademarks of the Bradley Collection, Inc. in the USA.

The Bradley Collection Ltd Lion Barn • Maitland Road • Needham Market • Suffolk • IP6 8NS • UK The Bradley Collection Inc 10866 Washington Blvd #1275 • Culver City • CA 90232 • USA



EDIT10N 25 | 27



LINEAR

Linear 2 transforms an electric track into an architectural feature. The integrated metal cartridge works with engineered motor adaptors, with brackets finished to match for a coordinated finish.

Smart tech meets sharp design.

Pictured: н27mm (11/16") Linear • Powered by Lutron • Raven - Satin

≯|LINEAR(2)

LEADING MOTOR OPTIONS

Linear may be specified with your choice of motors from the leading brands. This provides power and control options ranging from standalone battery powered systems to fully integrated home automation solutions.







FUNCTION

Wall fixed brackets may be specified in a matching track finish, incorporating magnetic cover plates.



METALCOAT DETAILING

The innovative, embedded cartridge is paired with precision engineered metal adaptors finished to match the system. Allowing a single or a twin drive which sit discreetly behind the curtain.



TRUE FLUSH

The direct fix ceiling brackets provide truly flush ceiling mounting.



GLIDING

Gypsum and Anthracite colours offered as standard for gliders. Metalcoat rollers and Metalcoat Ripplefold rollers available for exact colour match. A low-friction channel coating ensures quieter performance.



MODERN HEADINGS

The choice of motor systems means that modern headings can be accommodated, with both Wave® and Ripplefold® styles available.



LAYERED SHADING

Tracks can be supplied to any length Θ , subject to maximum weight loadings of the selected motorised system.



BENT TO SHAPE

A bespoke bay bending and curving service is available on all systems to allow the perfect shaped track to fit any bay window.



All tracks and components may be specified in this stunning palette of colours and finishes, with a choice of coat options throughout.

COAT OPTIONS





High metallic fleck coatings. Available in Satin and Gloss sheen levels.





Platinum ®@ Champagne 99





Gold ®@ Cognac ®®






Antique Brass © ©



Bronzed @ @ Pewter ® ©


SHADES

A superb selection of opaque colours, all available in a choice of Matte, Satin or Gloss finish.

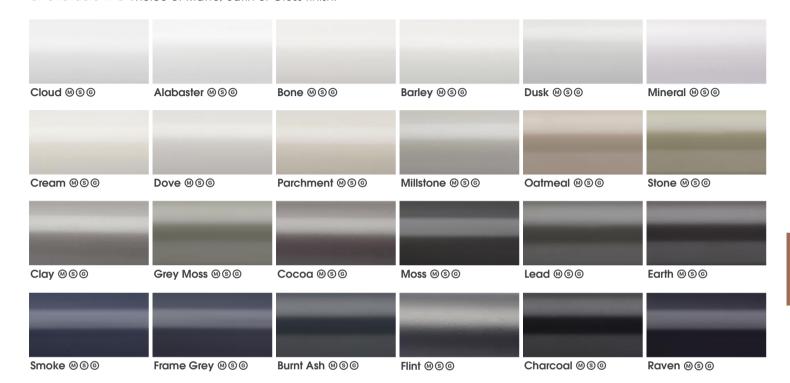

ANODICS

A flat metal colour group, with an anodised style.

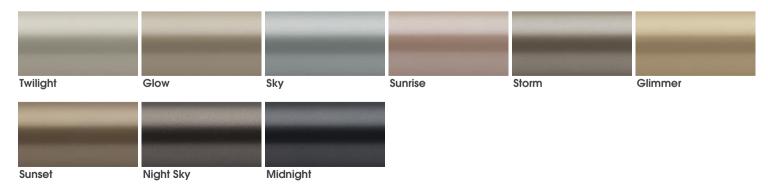



CERAMICS

CERAKOTE*

Finished with ceramic Cerakote for industry leading protection and a flawless finish that endures daily life.



Copper ⊕

BRACKET OPTIONS

SINGLE For straightforward applications.

Projection from wall to track centre 100mm (4")

Side Fixing plate size w40mm (1%6") x H75mm (215/16") Mid Fixing plate size w40mm (1%6") x н36mm (1%6")

Flush Ceiling Kit For direct ceiling fitting.



Drop from ceiling to top of track

0mm (0")

RECESS Designed for rebates.

Recess With hook stop

Depth off wall 14mm (%6")

Fixing plate size

w42mm (111/16") x H27mm (11/16")

ADJUSTABLE Designed to give flexibility during installation.



Projection from wall to track centre Min.80mm (3\%") Max.130mm (5\%")

Side Fixing plate size w47mm (11/8") x H75mm (215/6") Mid Fixing plate size

w47mm (1%") x H36mm (1%6")

DOUBLE Designed for layered shading.

Projection from wall to track

F140mm (5½") B40-60mm (1½6-2³/8")

Side Fixing plate size w47mm (11/8") x H75mm (215/6") Mid Fixing plate size

w47mm (17/8") x H36mm (17/16")

CUSTOM BRACKETS Designed to suit any window. §

Custom Projection



Specify the exact projection needed. **Custom Fixing Plate**



Relevant where space is restricted or weight is a concern.



Helps negotiate cornice & similar architectural features.

Ceilina Brackets



Specify exact drop required from ceiling. **Analed Brackets**



The solution for tight and awkward locations.

GLIDING OPTIONS

Glider

For standard headings.

Drop (13/16") Colour Options: Gypsum • Anthracite

For standard headings.

Drop (13//6") Colour Options: Gypsum • Anthracite

For standard headings.

Metalcoat Roller®

Drop (13/16") Colour Options: System Colour ®

Sine Glider Sine Roller Metalcoat Sine Roller®

For use with wave-style tape.

Drop(13/16") Sine Pitch: 80mm (3\%") Colour Options: Gypsum • Anthracite

For use with wave-style tape.

Drop (13/16") Sine Pitch: 60mm (2\%") • 80mm (3\%") Colour Options: System Colour®

For use with wave-style tape.

Drop (13/6") Sine Pitch: 60mm (23/8") • 80mm (31/8") Colour Options: System Colour®

Metalcoat Ripplefold Roller®



For use with snap tape

Drop(13/16") Ripplefold® Fullness: 80% • 100% Colour Options: System Colour®

(9) Glider/Roller drop from bottom of profile to bottom of eyelet • Ripplefold drop from bottom of profile to centre of eyelet

BESPOKE TRACKS

Tracks are cut, bent and curved to suit individual requirements. When calculating the length of your track, remember to allow tolerance beyond the width of the frame for the curtains to stack back to the edge of the window.

Tracks exceeding the maximum length will be cut into equal parts unless otherwise specified. A track joiner will be supplied.



Maximum distance between brackets Maximum length in one piece Standard Bend radius H27mm (11/16") W32mm (11/4") 1000mm (39") 4000mm (157")⊕ **R**275mm (10 ¹³/₁₆")

Double Linear systems may be specified with a motor to front and rear. It is also possible to specify a motor to the main curtain and a manual track to the rear.

SYSTEM OPTIONS

Systems can be specified with your preferred motor and control system. Choose drives from Lutron, Somfv or Silent Gliss



Key features

Power Options: Mains powered Suitable for Bay Windows: 🗸 Touch and go operation: X Manual operation during power failure: \checkmark Noise level at 1000mm (3'): <44dBA Control Options: Lutron® QS Home Wireless Remote & App Control Home automation systems

MOTOR OPTIONS

4 D105



Requires professional installation.

Power Type: Mains power Control Type: Wired or Remote via Radio donale Colour: White

4 D145



Requires professional installation.

Power Type: Mains power Control Type: Wired or Remote via Radio donale Colour: White

4 D175



Requires professional installation.

Power Type: Mains power Control Type: Wired or Remote via Radio dongle Colour: White

CONTROL OPTIONS

Remote Controls Pico

Single channel hand held remote control options available.



Protocol: Sivoia QS wireless system Channels: 1 Frequency: 433MHz Colour: White

App Controls **RA2 Select Hub**

Lutron shading systems can be controlled via Lutron App or through smart devices.



Protocol: Sivoia QS wireless system Compatibily: Alexa • Google Home Frequency: 433MHz • 868MHz Colour: Black

Automation systems

The system can also be integrated with all major home control systems.®











Key features

Power Options: Battery & Mains powered Suitable for Bay Windows: ✓ ⊗ Touch and go operation: ✓ Manual operation during power failure: ✓ Noise level at 1000mm (3'): <44dBA Control Options: Wireless & App Control via RTS or Zigbee 3.0 Home automation systems

MOTOR OPTIONS

∳ Glydea Ultra 60e



Requires professional installation.

Power Type: Mains Motor Type: WT • RTS • Zigbee 3.0



Requires no pre-wiring.

Power Type: Battery Control Type: RTS



Requires professional installation.

Power Type: Mains Control Type: WT • RTS





Requires no pre-wiring.

Power Type: Battery Control Type: RTS

CONTROL OPTIONS

Remote Controls Situo • Ysia

Single channel & Multi-channel hand held remote control options available



Protocol: RTS Channels: 1 • 5 Frequency: 433MHz Colour Options: White

Protocol: Zigbee 3.0 Channels: 1 • 5 Frequency: 433MHz Colour Options: White

App Controls Tahoma

Somfy shading systems can be controlled via Tahoma App or through smart devices.



Protocol: RTS • Zigbee 3.0 Compatibily: Alexa • Google Home Frequency: 433MHz • 868MHz Colour Options: White

Automation systems

The system can also be integrated with all major home control systems.®









🗲 Mains Power | 📾 Battery Power | 🚳 Movelite 35 WF is not suitable for bay bends | 🔞 Specialist support & additional components required ▲ Weight restrictions apply to gliding type & application. For full technical information please refer to the specification guide. www.bradleycollection.com/downloads/

4 Mains Power | ② Specialist support & additional components required ▲ Weight restrictions apply to gliding type & application. For full technical information please refer to the specification guide. www.bradleycollection.com/downloads/

SYSTEM OPTIONS

Systems can be specified with your preferred motor and control system. Choose drives from Lutron, Somfy or Silent Gliss



Key features

Power Options: Mains powered - 100-250 AC and/or 24 V DC in one motor

Suitable for Bay Windows:

Touch and go operation:

Manual operation during power failure: ✓
Noise level at 1000mm (3'): <36dBA

Control Options: Wireless Remote & App Control

Home automation systems via Silent Gliss Smart

MOTOR OPTIONS

4 9060 Motor



Requires professional installation.

Power Type: Mains AC • DC
Control Type: Main power and/or Dry Contact
Colour Options: White • Silver • Black

4 9060 Motor with 11939 Radio module



Requires professional installation.

Power Type: Mains AC * DC

control Type: SG Control N and/or Dry Contact

colour Options: White • Silver • Black

4 9060 Motor with 11270 Smart module



Requires professional installation.

Power Type: Mains
Control Type: Home Automation via SG Smart
Colour Options: White • Silver • Black

CONTROL OPTIONS

Remote Controls 11931 • 11932

Single channel & Multi-channel hand held remote control options available.



Protocol: SG Control N Channels: 1 • 6 Frequency: 433MHz Colour Options: White • Black

App Control Move 4.0 11900

9060 Motors are controllable via the Silent Gliss Move® app on smart devices.



Protocol: SG Control N
Frequency: 433MHz • 868MHz
Colour Options: Black

Automation systems Silent Gliss Smart

Silent Gliss 9060 motor integrates with major home control systems via SG Smart.®®



Protocol: SG Smart Communication: Two way

