CONTACT

www.bradleycollection.com









UK & REST OF THE WORLD

USA & CANADA

← +44 (0) 1449 722 724

←1 (310) 815 8255

LONDON SHOWROOM

THE **BRADLEY** COLLECTION



The Bradley Collection Ltd Lion Barn • Maitland Road • Needham Market • Suffolk • IP6 8NS • UK



EDIT10N 25 | 27



This collection sets a benchmark in drapery hardware. Hidden brackets, seamless joins, and perfectly matched pole and glider colours create a unified elevated aesthetic.

Pure Refinement, Perfectly concealed

Pictured: Round ø38mm (11/2") Pole • Seamless • Charcoal - Matte

116

GLIDE

SEAMLESS END

Precision engineering achieves an uninterrupted, seamless end.



QUIET RUNNING Within the channel, a low-friction

Within the channel, a low-friction coating works alongside improved roller and metal-coated roller designs to ensure quieter performance.




CONCEALED BRACKETS

The bracket architecture is shared with Float and Drive, and keeps the front face of the pole clear of visible parts.



PRECISE JOINING

Innovative jointing ensures seamless, precision alignment between pole sections.

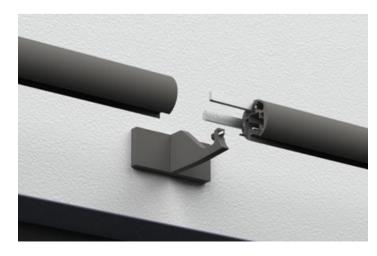

METALCOAT DETAILS

Glide includes optional Metalcoat gliding components, for an exact colour match to the pole.



RIPPLEFOLD OR SINE

Modern sinuous heading styles can be created, using both hook and tape or snap tape components.



FLUSH CEILING

The rear fixing brackets allow for true flush ceiling installation.



BENT TO SHAPE

Glide profile can be accurately bent and curved to shape, with optional adjustable brackets, delivering installation flexibility.



FINISHES

Glide offers a striking palette of finishes, with a refined range of coat options to suit every scheme.

SHADES


A superb selection of opaque colours, all available in a choice of Matte, Satin or Gloss finish.





ORGANICS

A textured finish, inspired by nature.



METALLICS

High metallic fleck coatings.

Available in Satin and Gloss sheen levels.



ANODICS

A flat metal colour group, with an anodised style.






Pictured: ø38mm (1½") Pole • Drum • Metalcoat Gliders • Electrum

CERAMICS

CERAKOTE

Copper ⊕

Finished with ceramic Cerakote for industry leading protection and a flawless finish that endures daily life.

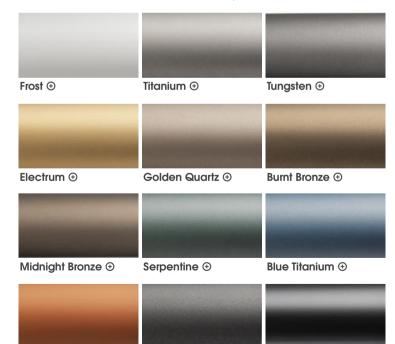

Cobalt ⊕

Graphite Black ⊕

CHROMATICS

Brushed and etched aluminium, elevated with modern tints. Understated luxury with an architectural edge.

Sealed in a clear, ceramic coating for lasting durability.



Pictured: ø38mm (1½") Pole · Planar · Metal Coat Gliders · Etched Brass







Pictured: ø30mm (13/16") Pole • Seamless • Metalcoat Gliders • Antique Brass - Satin

FINIALS

Glide's continuous ends express a seamless, contemporary aesthetic. The Seamless end cap is supplied as standard, creating pure, minimalist lines.

For added refinement, understated geometric finials introduce a hint of decorative detail.



Seamless® Supplied as standard

ø30mm (1%6") Inclusive Length 5mm (%6") ø38mm (1%2") Inclusive Length 5mm (3%6")



Orbic.

ø30mm (1³/₁₆") Inclusive Length 13mm (½") **ø**38mm (1½") Inclusive Length 15mm (%")



Orbic Grand

ø30mm (13/6") Inclusive Length 13mm (½") ø38mm (1½") Inclusive Length 15mm (%6")



Drum

ø30mm (1%6") Inclusive Length 21mm (1%6") ø38mm (1½") Inclusive Length 23mm (%")



Tulip

ø30mm (13/6") **Inclusive Length** 35mm (13/8") **ø**38mm (11/2") **Inclusive Length** 43mm (111/16")



Oblique

ø30mm (1%6") Inclusive Length 21mm (1%6") ø38mm (1%2") Inclusive Length 23mm (%8")



Planar

ø30mm (13/6") Inclusive Length 25mm (1") ø38mm (1½") Inclusive Length 29mm (1½")



Ellipse

ø30mm (1%6") Inclusive Length 29mm (1%") ø38mm (1½") Inclusive Length 33mm (15%6")



Spheric

ø30mm (1%6") Inclusive Length 53mm (2%6") ø38mm (1%") Inclusive Length 65mm (2%6")

BRACKET OPTIONS

SINGLE For straightforward applications.



Diameter

ø30mm (13/6") ø38mm (1½")

Projection from wall to pole centre

60mm (2\%") • 100mm (4") 100mm (4")

Fixing plate size

w30mm (13/6") x H70mm (23/4") w38mm (1½") х н89mm (3½")

Mid



Diameter

ø30mm (13/16") ø38mm (1½")

Projection from wall to pole centre

60mm (2%") • 100mm (4") 100mm (4")

Fixing plate size

w70mm (23/4") x H30mm (13/6") w89mm (3½") x **H**38mm (1½")

Flush Ceiling



Diameter

ø30mm (13/6") ø38mm (1½")

Drop from ceiling to top of pole

7mm (1/4") 7mm (1/4")

Fixing plate size

w70mm (23/4") x H30mm (13/6") w70mm (23/4") x H30mm (13/6")

RECESS Designed for rebates.

Recess With hook stop



Diameter

ø30mm (13/6") ø38mm (1½")

Depth off wall

10mm (%") 10mm (3/8") Fixing plate size

ø38mm (1½")

ø48mm (11/16")

ADJUSTABLE Designed to give flexibility during installation.



Diameter

ø30mm (13/16") ø38mm (1½")

Projection from wall to pole centre

Min.90mm (3\%") Max.110mm (4\%") Min.90mm (3\%") Max.110mm (4\%") Fixing plate size

w38mm (1½") x H70mm (2¾") w46mm (1¹³/₁₆") х н89mm (3½")



Diameter

ø30mm (13/16") ø38mm (1½")

Projection from wall to pole centre

Min.90mm (3%6") Max.110mm (45/16") Min.90mm (3%6") Max.110mm (45/16") Fixing plate size

w70mm (23/4") x H30mm (13/6") w89mm (3½") х н38mm (1½")

DOUBLE Designed for layered shading.



Diameter

Fø30mm (13/6") Bø30mm (13/6")

Fø38mm (1½") Bø30mm (1¾6") Fø38mm (1½") Bø38mm (1½")

Projection from wall to pole centre

F160mm (65%") B 60mm (23%") F160mm (65/16") B 60mm (23/8") F160mm (65%") B 60mm (23%") Fixing plate size

w57mm (21/4") x H114mm (41/2") w57mm (2¼") x H114mm (4½") w57mm (21/4") x H114mm (41/2")



Diameter

Fø30mm (13/6") Bø30mm (13/6") Fø38mm (1½") Bø30mm (1¾6") Fø38mm (1½") Bø38mm (1½")

Projection from wall to pole centre

F160mm (65%") B60mm (23%") F160mm (65/16") B 60mm (23/8") F160mm (65%6") B60mm (23%") Fixing plate size

w114mm (4½") x **H**57mm (2½") w114mm (4½") x **H**57mm (2¼") w114mm (4½") x H57mm (2¼")

Flush Partition



Diameter

Fø30mm (13/6") Bø30mm (13/6") Fø38mm (1½") Bø38mm (1½")

Drop from ceiling to top of pole

7mm (1/4") 7mm (1/4") Fixing plate size

w89mm (3½") х н38mm (1½") w89mm (3½") x н38mm (1½")

CUSTOM BRACKETS Designed to suit any window. §

Custom Fixing Plate



Specify the exact projection needed.

Custom Projection

Relevant where space is restricted or weight is a concern.



Helps negotiate cornice & similar architectural features.

Ceiling Brackets



Specify exact drop required from ceiling. **Angled Brackets**



The solution for tight and awkward locations.

GLIDING OPTIONS



For standard headings.

Drop@: 15mm (5%")

For standard headings.

Drop15mm (5%") Colour Options: Gypsum • Anthracite Colour Options: Gypsum • Anthracite

For standard headings.

Drop③: 15mm (%") Colour Options: System Colour®

Metalcoat Sine Roller®

Sine Glider Sine Roller

For use with wave-style tape.

Drop③: 15mm (5%") Sine Pitch: 80mm (31/8") Colour Options: Gypsum • Anthracite For use with wave-style tape.

Drop③: 15mm (5%") Colour Options: Gypsum • Anthracite

Sine Pitch: $60mm (2\%") \cdot 80mm (3\%")$ Sine Pitch: $60mm (2\%") \cdot 80mm (3\%")$

For use with wave-style tape.

Drop15mm (5%") Colour Options: System Colour® Metalcoat Ripplefold Roller®



For use with snap tape.

Drop③: 18mm (11/16") Ripplefold® Fullness: 80% • 100% Colour Options: System Colour®

① Glider/Roller drop from bottom of profile to bottom of eyelet • Ripplefold drop from bottom of profile to centre of eyelet.

(9) Metalcoat Gliders, supplied in satin finish on Matte & Gloss finished systems

POLES

Poles are cut, bent and curved to suit individual requirements. When calculating the length of your pole, remember to allow tolerance beyond the width of the frame for the curtains to stack back to the edge of the window.

Poles exceeding the maximum length will be cut into equal parts unless otherwise specified. A pole joiner will be supplied.





Size	Maximum distance between brackets	Maximum length in one piece	Standard Bend radius
ø30mm (1³/16″)	1000mm (39")	4000mm (157″)⊖	R 250mm (10")
ø38mm (1½″)	1000mm (39")	4000mm (157″) ⊕	r 400mm (16")

© Supplied in sections - Section lengths over 3.0m (118") will incur a handling charge
For full technical information, sizes and weights please download the specification guide - www.bradleycollection.com/downloads/

ACCESSORIES

Draw Rods Seamless

Draw rod length: 1000mm (393/8")

Custom lengths available to order

