CONTACT

www.bradleycollection.com











UK & REST OF THE WORLD

USA & CANADA

& +44 (0)1449 722 724

& +1 (310) 815 8255

LONDON SHOWROOM

\(+44 \) (0)207 871 7793







Specialised fixings for mounting brackets will be required in certain situations and are not provided as standard. Steel items are not recommended for damp conditions such as shower rooms. Crystal finials should not be positioned in direct sunlight, and are not suitable for use in conservatories.

The Bradley Collection reserves the right to modify design and materials without prior notice as part of a process of continual product improvement. Due to printing limitations, colours in this brochure may not be accurate.


Products are protected by Design Rights, under provisions of Copyright, Designs & Patents Act 1988. Bradley® and The Bradley Collection® are registered Community trademarks of The Bradley Collection Ltd. in Europe and registered trademarks of the Bradley Collection, Inc. in the USA. Gliderpole is a registered trademark of The Bradley Collection Ltd in the UK.

The Bradley Collection Ltd Lion Barn • Maitland Road • Needham Market • Suffolk • IP6 8NS • UK The Bradley Collection Inc 10866 Washington Blvd #1275 • Culver City • CA 90232 • USA

Printed: 1025 • Copyright © The Bradley Collection Ltd. 2025





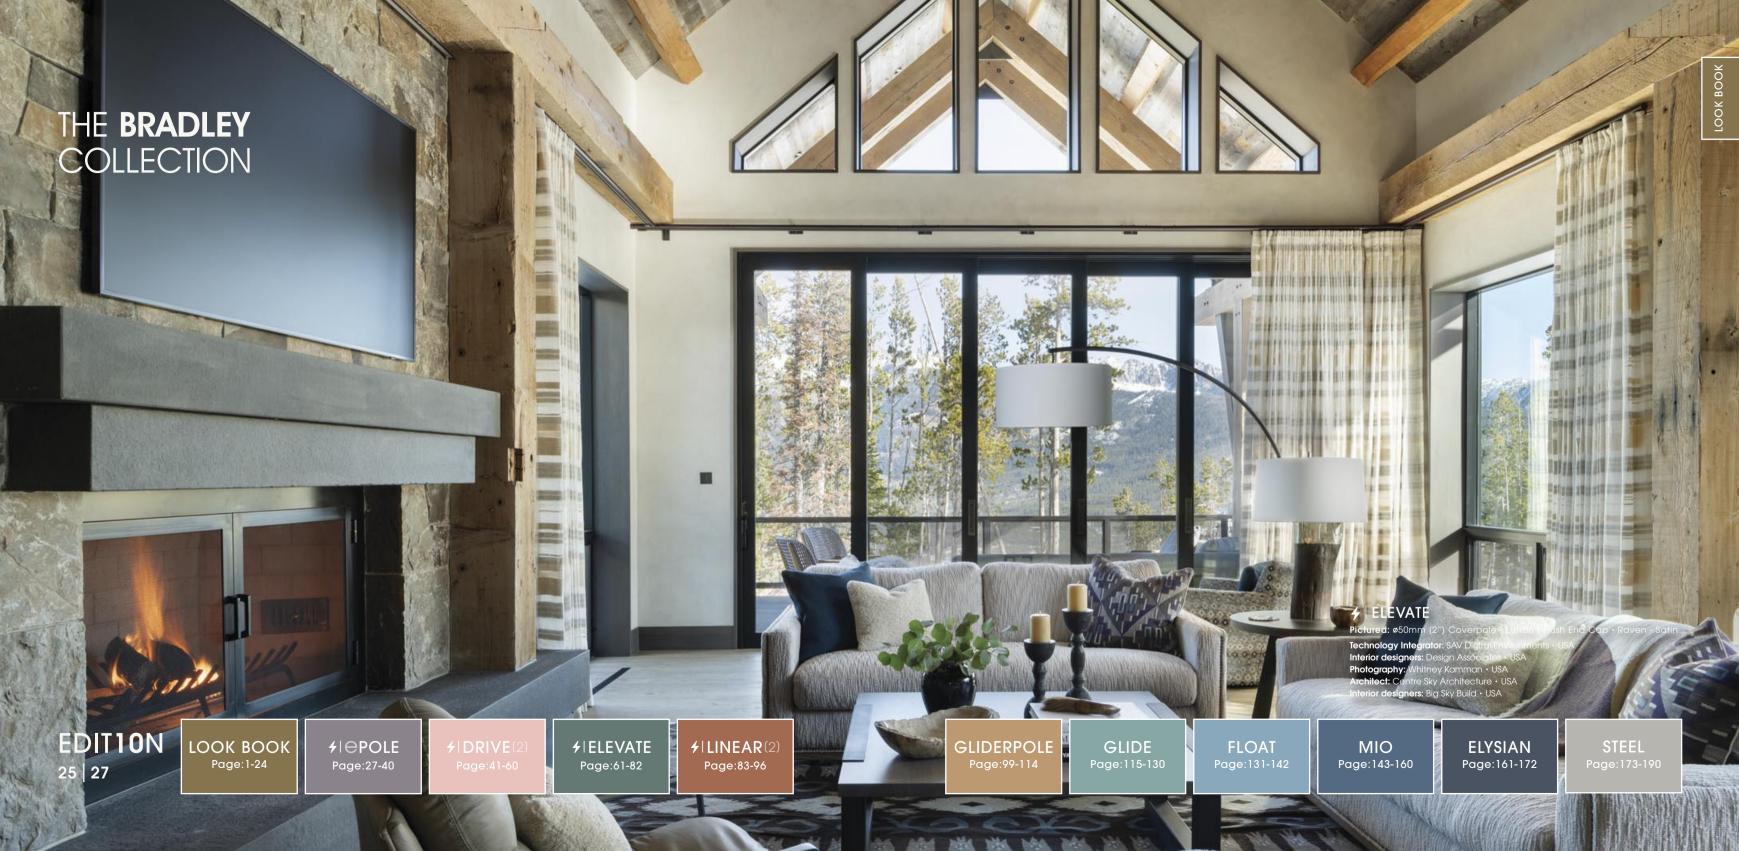



The Edition 10 Look Book showcases stunning new imagery, created in collaboration with a community of international, visionary designers.

Discover how our iconic collections transform interiors across the world.

∳|ELEVATE

Pictured: ø50mm (2") Coverpole - Lutron • Flush End Cap • Raven - Satin

Technology Integrator: SAV Digital Environments • USA Interior designers: Design Associates • USA Photography: Whitney Kamman • USA Architect: Centre Sky Architecture • USA Interior designers: Big Sky Build • USA

SEA VIEW

This sensational view remains beautifully unobstructed, while side windows benefit from the Elevate electric treatment - curtains that glide open and closed with one-touch control.

*****|ELEVATE

Pictured: ø38mm (1½") Coverpole - Lutron · Standard Stud · Flint - Satin Window treatments: Ace Contracts · UK | www.acecontracts.com



FRAMED BY LIGHT

Refined bay window dressing, combining crisp pleats with seamless French returns, for a tailored, modern finish.

MIO

Pictured: ø25mm (1") French • Flint - Satin

Drapery design: Jim Davis Designs • USA | ∅ jimdavisdesigns • www.jimdavisdesigns.com





Beautiful windows surround this classic bay. The result is a calm yet characterful space, designed for everyday living.



Round Ø30mm (1%6") Gliderpole $^{\oplus}$ - Hand Drawn • Flush End Cap • Flint - Satin Interior design: A New Day Interior Design Studio • UK Photography: \oplus Anna Stathaki | \oplus annastathakiphoto









MODERN MEETS CLASSIC

Where heritage character meets modern comfort - richly patterned curtains flow effortlessly from Gliderpole, perfectly outlining the leaded windows.

GLIDERPOLE

Round Ø50mm (2") Gliderpole® - Hand Drawn • Orbit • Antique Brass - Satin

Interior design: Megan Griffin Interiors • UK
Photography: Andrea Gilpin photography



PANORAMIC TERRACE

A fluid connection between indoors and out, styled with quiet luxury.

STEEL

Pictured: ø38mm (1½") Pole • Standard Stud • Oil Rubbed
Interior design: Fournir & Co • Australia | www.fournirandco.com.au
Photography: Hannah Caldwell | @_hannahcaldwell | www.hannahcaldwellphotography.com





COLOURFUL WORK SPACE

A creative retreat designed for both work and leisure. The Steel curtain pole frames vibrant curtains, adding definition to the room's architectural lines.

ELYSIAN

Pictured: ø38mm (1½") Pole · Globe · Raven - Satin

Interior design: Anne Haimes Design \cdot UK

Photography: Andrew Beasley





∳|**⊖POLE**Page:27-40

∳|**DRIVE**(Page:41-60 Fage:61-82

4 | LINEAR(2) Page:83-96

25



4 (POLE

ePole is a plug-and-play curtain pole with a quiet, powerful motor and sleek remote. A discreet USB bridge enables smartphone or voice operation. Simple to install, pairs perfectly with Gliderpole brackets and finials.

Smart design. Truly Plug & Play.

Pictured: ø38mm (1½") ePole • Discus • Antique Brass - Satin

FICPOLE

PLUG & PLAY MOTORS


Engineered for ease, the system uses a quiet and powerful motor. The battery motor offers a simple, cable-free install, while the mains option requires a high-level wall socket.



CONTROLLED YOUR WAY

The system can be controlled via hand-held remote control, Smart device App or voice control.

Pairing and app connection is intuitive and straightforward.

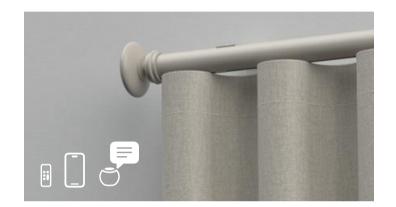



EASIER INSTALLATION

The ePole utilises the brackets from the proven Gliderpole collection and incorporates the clever T-bar guide, which perfectly indexes the tapped hole and grub screw.



Gliders and Rollers are available in either Gypsum or Anthracite colours.

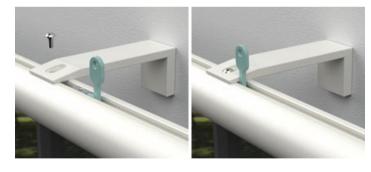

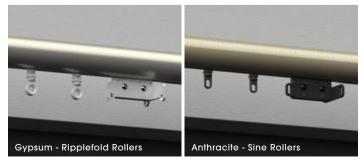

DISCREET DESIGN

The 38mm ($1^{1}/2^{"}$) pole is paired with an embedded cartridge and a polymer motor adaptor, allowing single or twin drives to sit discreetly behind the curtain.



BRACKET SUITE

The ePole is compatible with the entire Gliderpole bracket suite, offering wall and ceiling fix, double brackets for layered shading and adjustable brackets for tricky installs.



BENT OR CURVED TO SHAPE

ePole has been developed to fit any window shape. Precision bending and adjustable brackets ensure a perfect fit.



MODERN HEADINGS

Modern sinuous heading styles can be created, utilising either hook and tape or snap-tape components.



FINISHES

A full range of colours and finishes are available with a choice of coat options throughout.

COAT OPTIONS






METALLICS

High metallic fleck coatings.

Available in Satin and Gloss sheen levels.

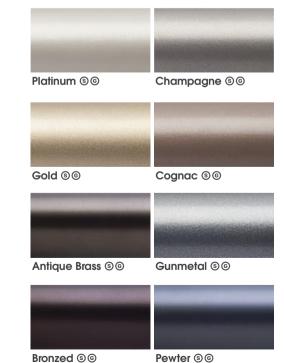

ANODICS

A flat metal colour group, with an anodised style surface texture.



SHADES

A superb selection of opaque colours, all available in a choice of Matte, Satin or Gloss finish.



FINIALS



Flush End Cap Supplied as standard

Round ø38mm (1½") Inclusive Length 3mm (1/8")



Flush Stud

Round ø38mm (1½") Inclusive Length 18mm (11/16")



Round ø38mm (1½") Inclusive Length 18mm (11/16")



Disc

Round ø38mm ($1\frac{1}{2}$ ") Inclusive Length 12mm ($\frac{1}{2}$ ")



Squat Disc

Round ø38mm (1½") Inclusive Length 32mm (1¼")



Faceted Disc

Round ø38mm ($1\frac{1}{2}$ ") Inclusive Length 37mm ($1\frac{1}{2}$ ")



Pebble



Round ø38mm (1½") Inclusive Length 42mm (15%") Round ø38mm (1½") Inclusive Length 66mm (25%")

Pictured: ø38mm (1½") 🗲 ePole • Flush Stud • Sunset

Clean & Understated

poise and simple lines.

This design group is a thoughtfully scaled edit of the leading Gliderpole designs.

All finials are characterised by lightness,

For full technical information, sizes and weights please download the specification guide

FINIALS Glamorous & Flamboyant Classical design cues have been re-interpreted to suit modern style sensitivity. Pictured: ø38mm (1½") 🗲 ePole • Jewel • Raven - Satin



Halc

ø38mm (1½") Inclusive Length 2mm (1/6")



Aura

ø38mm (1½") Inclusive Length 2mm (1/6")



Orbit

ø38mm (1½") Inclusive Length 40mm (15/8")



Discus

ø38mm (1½″) Inclusive Length 44mm (1¾″)



Jewel

ø38mm (1½") Inclusive Length 42mm (15/8")



Flute

ø38mm (1½") Inclusive Length 69mm (211/16")



Squat Globe

ø38mm (1½") Inclusive Length 63mm (2½")



Globe

ø38mm (1½") Inclusive Length 92mm (35/8")



Ribbed Globe

ø38mm ($1\frac{1}{2}$ ") Inclusive Length 92mm ($3\frac{5}{8}$ ")



ø38mm (1½") Inclusive Length 85mm (3%")



Templar

ø38mm (1½") Inclusive Length 92mm (35%")



Crystal Templar*

ø38mm (1½") Inclusive Length 92mm (35%")

* Crystal Finials should not be positioned in direct sunlight

BRACKET OPTIONS

SINGLE For straightforward applications.

Diameter Round ø38mm ($1\frac{1}{2}$ ") 60mm ($2\frac{3}{8}$ ") • 100mm (4")

Projection from wall to pole centre Side Fixing plate size

Mid Fixing plate size

w32mm (1¼") x н70mm (2¾") w32mm (1¼") x н38mm (1½")

Round ø38mm (1½") 100mm (4") • 140mm (5½")

Diameter

Projection from wall to pole centre

Side Fixing plate size

Mid Fixing plate size

w47mm (11/8") x н76mm (3") w47mm (11/8") x н36mm (11/16")

Heavy Duty

Round ø38mm (1½") 3mm (%")

Drop from ceiling to top of pole

Fixing plate size

w40mm (1%6") x **L**59mm

RECESS Designed for rebates.

Recess With hook stop

Depth off wall Round ø38mm (1½") 14mm (%6")

Fixing plate size

w50mm (2") x H41mm (1%")

ADJUSTABLE Designed to give flexibility during installation.

Projection from wall to pole centre Side Fixing plate size

Mid Fixing plate size

Round ø38mm (11½") Min.80mm (3%") Max.130mm (5%") w47mm (1%") x H76mm (3") w47mm (1%") x H36mm (1%") x H36mm (1%")

DOUBLE Designed for layered shading.

Projection from wall to pole centre Side Fixing plate size

Mid Fixing plate size

CUSTOM BRACKETS Specialist designs can be produced for awkward or unusual installations. §

Custom Projection

Specify the exact

projection needed.



Custom Fixing Plate





Helps negotiate cornice

& similar architectural

features.

Ceiling Brackets



Specify exact drop

required from ceiling.



The solution for tight and awkward locations.

number of the control of the control

Relevant where space is

restricted or weight is a

concern.

SYSTEMS

Double ePole systems may be specified with a motor to front and rear. It is also possible to specify a motor to the main curtain and a manual 38mm (1½") pole to the rear.



MOTOR

Key features

Maximum length: 6 Metres (19ft)⊕

Suitable for Bay Windows: ✓

Suitable for Curved Windows: ✓

Header types: Standard, Sine and Ripplefold®

Power Options: Battery & Mains powered

Touch and go operation: ✓

Obstacle Detection: ✓

Manual operation during power failure: ✓



AM50 Motor



Plug & Play: Requires no pre-wiring.

Power Type: Battery - Recharable via USB-C Control Type: Remote • App Control



Gypsum Motor Adaptor



Anthracite Motor Adaptor

4 AM50 Motor



Plug & Play: Requires high-level, adjacent power socket.

Power Type: Mains power - 1m (39") cable with regional plug
Plug Type: UK • North American
Control Type: Remote • App Control
Connectivity: Ethernet Port

CONTROL OPTIONS

Remote Controls

Multi-channel hand held remote as standard.



Channels: 6
Frequency: 433MHz
Colour Options: White

App & Voice Controls

App control via USB Hub & Tuya integration.



The system may be seamlessly controlled through the Tuya app for effortless convenience.

Tuya integration also allows linking voice control systems for ultimate freedom.





GLIDING OPTIONS

Glider Roller

For standard headings.

Drop®: 20mm (13/16")

Colour Options: Gypsum • Anthracite

Colour Options: Gypsum • Anthracite

For standard headings.

Drop (13//6")

Colour Options: Gypsum • Anthracite

Colour Options: Gypsum • Anthracite



Colour Options: Gypsum • Anthracite

(9) Glider/Roller drop from bottom of profile to bottom of eyelet • Ripplefold drop from bottom of profile to centre of eyelet

POLES

Poles are cut, bent and curved to suit individual requirements. When calculating the length of your pole, remember to allow tolerance beyond the width of the frame for the curtains to stack back to the edge of the window.

Poles exceeding the maximum length will be cut into equal parts unless otherwise specified. A pole joiner will be supplied.



Size	Maximum distance between brackets	Maximum length in one piece	Standard Bend radius
ø38mm (1½″)	1000mm (39")	4000mm (157″) ⊕	r 400mm (16")

© Supplied in sections - Section lengths over 3.0m (118") will incur a handling charge
For full technical information, sizes and weights please download the specification guide - www.bradleycollection.com/downloads/



Innovative and cutting edge, Drive 2 redefines electrically operated curtain poles. An evolution of previous designs, it combines a full round profile with clean, modern lines and tailored solutions for every shaped window - all powered by the world's leading motor brands.

Powered Precision. Redefined Design

Pictured: \emptyset 38mm ($1^1/2^n$) * Drive Pole • Powered by Lutron • Planar Drive Rings • Antique Brass - Satin

→ DRIVE(2)

LEADING MOTOR OPTIONS

Drive can be paired with motors from the world's leading brands, offering solutions from discreet battery operation to fully integrated home automation.








PRECISE JOINING

A smart jointing system ensures perfect alignment between pole sections.

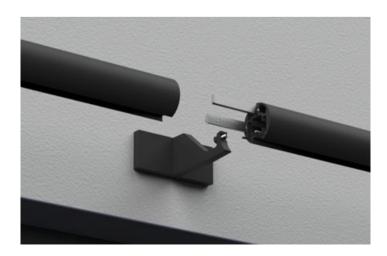

MOTOR ADAPTOR

For optimal curtain appearance, motors may be positioned either in-line (for standard pleated headings) or at 90 degrees to the pole (for wave-shaped or Ripplefold headings).



BENT TO SHAPE

Drive profile can be accurately bent and curved to shape, with optional adjustable brackets, delivering installation flexibility.



METALCOAT DETAILING

Gliders are offered in Gypsum & Anthracite as standard, with coated metal options available for an exact colour match. A low-friction coating supports improved roller design, offering quieter running.




FLUSH CEILING

The rear-fixed bracket is engineered to achieve true flush ceiling installation.



RINGS

For a decorative finish, rings are available, moved by the master carrier. Sinuous heading style with rings also offered. Bracket architecture ensures the front face of the pole remains clear of visible parts, completing the look.

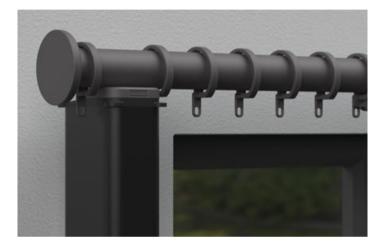

MODERN HEADINGS

Modern sinuous heading styles can be created, using both hook and tape or snap tape components.



FINISHES

This stunning palette of colours and finishes is available on all Drive poles and components, with a choice of coat options throughout.

SHADES


A superb selection of opaque colours, all available in a choice of Matte, Satin or Gloss finish.





ORGANICS

A textured finish, inspired by nature.



METALLICS

High metallic fleck coatings. Available in Satin and Gloss sheen levels.



ANODICS

A flat metal colour group, with an anodised style.







CERAMICS

CERAKOTE

Finished with ceramic Cerakote for industry leading protection and a flawless finish that endures daily life.



CHROMATICS

Brushed and etched aluminium, elevated an architectural edge.

Sealed in a clear ceramic coating for durability.









Pictured: ø38mm (1½") ∱Drive Pole • Powered by Somfy • Seamless • Metalcoat Rollers • Charcoal - Satin

FINIALS

The integrated ends embody seamless design. Supplied as standard, Seamless end caps create clean, minimalism, while geometric finials offer understated decorative accents.





Tulip **ø**38mm (1½") Inclusive Length 43mm (111/16")



Orbic Grand

ø38mm (1½") Inclusive Length 15mm (%6")

ø38mm (1½") Inclusive Length 23mm (1/8")



Drum

ø38mm (1½") Inclusive Length 23mm (1/8")

ø38mm (1½") Inclusive Length 29mm (1½")



ø38mm (1½") **Inclusive Length** 33mm (15/6")



ø38mm (1½") Inclusive Length 65mm (2%6")

Please note that if this option is selected finials cannot be added at a later date.
For full technical information, sizes and weights please download the specification guide - www.bradleycollection.com/downloads/

BRACKET OPTIONS

SINGLE For straightforward applications.

Diameter ø38mm (1½")

Projection from wall to pole centre 100mm (4")

Fixing plate size

w38mm (1½") х н89mm (3½")

Diameter ø38mm (1½") 100mm (4")

Projection from wall to pole centre

Fixing plate size

w89mm (3½") х н38mm (1½")

Flush Ceiling

Diameter ø38mm (1½") Drop from ceiling to top of pole

Fixing plate size

w70mm (23/4") x H30mm (13/6")

Ceiling For systems with Rings



Diameter ø38mm (1½") Drop from ceiling to top of pole

Fixing plate size 7mm (1/4")

w70mm (2³/₄") x **H**30mm (1³/₁₆")

RECESS Designed for rebates.

Recess With hook stop

Diameter ø38mm (1½") Depth off wall

1mm (1/16")

10mm (%")

Fixing plate size ø48mm (11/16")

ADJUSTABLE Designed to give flexibility during installation.



Diameter ø38mm (1½") Projection from wall to pole centre Min.90mm (3%6") Max.110mm (45/16") Fixing plate size

w46mm (1¹³/₁₆") x **H**89mm (3½")



Diameter ø38mm (1½") Projection from wall to pole centre Min.90mm (3\%") Max.110mm (4\%") Fixing plate size

w89mm (3½") х н38mm (1½")

DOUBLE Designed for layered shading.



Diameter Fø38mm (1½") Bø38mm (1½")

Optional Drive + Glide/Float System Fø38mm (1½") Bø30mm (1¾6") Fø38mm (1½") Bø38mm (1½")

F160mm (65/16") B 60mm (23/8") F160mm (65%6") B 60mm (23%") Fixing plate size

w57mm (21/4") x H114mm (41/2")

w57mm (21/4") x H114mm (41/2") w57mm (21/4") x H114mm (41/2")



Fø38mm (1½") Bø38mm (1½")

Optional Drive + Glide/Float System Fø38mm (1½") Bø30mm (1¾6") Fø38mm (1½") Bø38mm (1½")

Projection from wall to pole centre F200mm (8") B100mm (4")

Projection from wall to pole centre

F200mm (8") B100mm (4")

F160mm (65/16") B 60mm (23/8") F160mm (65/16") B 60mm (23/8") Fixing plate size

w114mm (4½") x **H**57mm (2¼4")

w114mm (4½") x H57mm (2¼") w114mm (4½") x H57mm (2¼")

Flush Partition



Diameter

Diameter

Fø38mm (1½") Bø38mm (1½")

Drop from ceiling to top of pole 1mm (1/16")

Fixing plate size w89mm (3½") x н38mm (1½")

Partition For systems with Rings



Diameter

Fø38mm (1½") Bø38mm (1½")

Drop from ceiling to top of pole 7mm (1/4")

Fixing plate size w89mm (3½") x н38mm (1½")

CUSTOM BRACKETS Designed to suit any window. §

Custom Projection



Specify the exact projection needed.



Custom Fixing Plate

Relevant where space is restricted or weight is a concern.



Helps negotiate cornice & similar architectural features.

Ceiling Brackets



Specify exact drop required from ceiling. **Angled Brackets**



The solution for tight and awkward locations.

GLIDING OPTIONS



For standard headings.

Drop15mm (5%") Colour Options: Gypsum • Anthracite For standard headings.

Drop (5%") Colour Options: Gypsum • Anthracite For standard headings.

Metalcoat Sine Glider®

Drop15mm (5%") Colour Options: System Colours

Sine Glider Sine Roller

For use with wave-style tape.

Drop③: 15mm (5%") Sine Pitch: 80mm (3\%") Colour Options: Gypsum • Anthracite

For use with wave-style tape.

Drop15mm (5%") Sine Pitch: 60mm (2\%") • 80mm (3\%") Colour Options: Gypsum • Anthracite



Drop③: 15mm (5%") Sine Pitch: 60mm (2\%") • 80mm (3\%") Colour Options: System Colour®

For use with wave-style tape.

Drop③: 18mm (11/16") Ripplefold® Fullness: 80% • 100% Colour Options: System Colour®

 Glider/Roller drop from bottom of profile to bottom of eyelet
 Ripplefold drop from bottom of profile to centre of eyelet. Metalcoat Gliders, supplied in satin finish on Matte & Gloss finished systems

RING OPTIONS

Drive rings are engineered with acetal rollers and liners for smooth operation and a consistent upright position. By design, they pass brackets flawlessly.



Sine Ring® For standard headings. For use with wave-style tape. **ø38mm (1**½") Ring drop⊕: 62mm (2½6")

ø38mm (1½") Ring drop①: 62mm (27/16") Sine Pitch: 80mm (3\%")

Metalcoat Ripplefold Roller®

For use with snap tape.

Gypsum Roller & Liner Anthracite Roller & Liner

POLES

Poles are cut, bent and curved to suit individual requirements. When calculating the length of your pole, remember to allow tolerance beyond the width of the frame for the curtains to stack back to the edge of the window.

Poles exceeding the maximum length will be cut into equal parts unless otherwise specified. A pole joiner will be supplied.



Size	Maximum distance between brackets	Maximum length in one piece	Standard Bend radius
ø38mm (1½")	1000mm (39")	4000mm (157″)⊖	R 400mm (16")

Double Drive systems may be specified with a motor to front and rear. It is also possible to specify a motor to the main curtain and a manual pole to the rear. Simply specify either **GLIDE** or **FLOAT** Ø30mm $(1^3/_{16})^n$ or 38mm $(1^1/_2)^n$ for the rear.



SYSTEM OPTIONS

Systems can be specified with your preferred motor and control system. Choose drives from Lutron, Somfy or Silent Gliss



Key features

Power Options: Mains powered Suitable for Bay Windows: 🗸 Touch and go operation: X Manual operation during power failure: 🗸 Noise level at 1000mm (3'): <44dBAControl Options: Lutron® QS Home Wireless Remote & App Control Home automation systems

MOTOR OPTIONS

4 D105



Requires professional installation.

Power Type: Mains power Control Type: Wired or Remote via Radio dongle Colour: White

4 D145



Requires professional installation.

Power Type: Mains power Control Type: Wired or Remote via Radio dongle Colour: White

4 D175



Requires professional installation.

Power Type: Mains power Control Type: Wired or Remote via Radio dongle Colour: White

CONTROL OPTIONS

Remote Controls

Single channel hand held remote control options available.



Protocol: Sivoia QS wireless system Channels: 1 Frequency: 433MHz Colour: White

App Controls **RA2 Select Hub**

Lutron shading systems can be controlled via Lutron App or through smart devices.



Protocol: Sivoia QS wireless system Compatibily: Alexa • Google Home Frequency: 433MHz • 868MHz Colour: Black

Automation systems

The system can also be integrated with all major home control systems.®









Key features

Power Options: Battery & Mains powered Suitable for Bay Windows: ✓ ⊗ Touch and go operation: ✓ Manual operation during power failure: ✓ Noise level at 1000mm (3'): <44dBA Control Options: Wireless & App Control via RTS or Zigbee 3.0 Home automation systems

MOTOR OPTIONS



Requires professional installation.

Power Type: Mains Motor Type: WT • RTS • Zigbee 3.0



Irismo 45 WF

Requires no pre-wiring.

Power Type: Battery Control Type: RTS



♠ Movelite 35

Requires professional installation.

Power Type: Mains Control Type: WT • RTS



■ Movelite 35 WF[®]

Requires no pre-wiring.

Power Type: Battery Control Type: RTS

CONTROL OPTIONS

Remote Controls Situo • Ysia

Single channel & Multi-channel hand held remote control options available



Protocol: RTS Channels:1 • 5 Frequency: 433MHz

Protocol: Zigbee 3.0 Channels: 1 • 5 Frequency: 433MHz Colour Options: White Colour Options: White

App Controls Tahoma

Somfy shading systems can be controlled via Tahoma App or through smart devices.



Protocol: RTS • Zigbee 3.0 Compatibily: Alexa • Google Home Frequency: 433MHz • 868MHz Colour Options: White

Automation systems

The system can also be integrated with all major home control systems.®









f Mains Power | ■ Battery Power | ❷ Movelite35 WF is not suitable for bay bends | ❷ Specialist support & additional components required ▲ Weight restrictions apply to gliding type & application. For full technical information please refer to the specification guide. www.bradleycollection.com/downloads/

SYSTEM OPTIONS

Systems can be specified with your preferred motor and control system. Choose drives from Lutron, Somfy or Silent Gliss





Key features

Power Options: Mains powered - 100-250 AC and/or 24 V DC in one motor $\,$

Suitable for Bay Windows: \checkmark Touch and go operation: \checkmark

Manual operation during power failure: ✓
Noise level at 1000mm (3'): <36dBA

Control Options: Wireless Remote & App Control

Home automation systems via Silent Gliss Smart

MOTOR OPTIONS

4 9060 Motor



Requires professional installation.

Power Type: Mains AC * DC

control Type: Main power and/or Dry Contact

Colour Options: White • Silver • Black

4 9060 Motor with 11939 Radio module



Requires professional installation.

Power Type: Mains AC * DC
Control Type: SG Control N and/or Dry Contact
Colour Options: White • Silver • Black

4 9060 Motor with 11270 Smart module



Requires professional installation.

Power Type: Mains
Control Type: Home Automation via SG Smart
Colour Options: White • Silver • Black

CONTROL OPTIONS

Remote Controls 11931 • 11932

Single channel & Multi-channel hand held remote control options available.



Protocol: SG Control N Channels: 1 • 6 Frequency: 433MHz Colour Options: White • Black

App Control Move 4.0 11900

9060 Motors are controllable via the Silent Gliss Move® app on smart devices.



Protocol: SG Control N
Frequency: 433MHz • 868MHz
Colour Options: Black

Automation systems Silent Gliss Smart

Silent Gliss 9060 motor integrates with major home control systems via SG Smart.®®



Protocol: SG Smart Communication: Two way





Peerless and opulent, this collection truly has no rival.

A rare, luxurious aesthetic and freedom of expression in design are balanced with the final word in functionality and control.

The world's finest.

Pictured: \emptyset 38mm (1 $^1/_2$ ") Coverpole - Lutron • Standard Stud • Matte Brass **Project by:** Gallagher London • London SW7 - UK

≯|ELEVATE

LEADING MOTOR OPTIONS

Elevate may be specified with motors from the world's leading brands, providing solutions from standalone battery-powered units to complete home automation.

\$LUTRON





Elevate can be specified with Crestron on request.



For Double pole systems, a hand drawn rear pole may be specified if preferred.

SCALE

Elevate Coverpoles are available in two diameters, Ø38mm ($1^{1}/_{2}^{"}$) • 50mm (2"). Finial designs are carefully scaled to maintain the system aesthetic.





DETAILING

The secret of any design is in the detail. Nylon end housings are finished in a complementary colour, for a harmonious tonal effect.



ANY LENGTH

Coverpoles can be supplied to any length , subject to maximum weight loadings of the selected motorised system.



FUNCTION

A range of bracket options has been designed to ensure simple installation, including flush fit ceiling brackets.



BENT TO SHAPE

A bespoke bay bending service is available on all diameters to allow the perfect shaped pole to fit any bay window.⊗



MODERN HEADINGS

The choice of motor systems means that modern headings can be accommodated, with both Wave® and Ripplefold® styles available.





F|ELEVATE

EDGE

Edge is the epitome of understatement, being sleek, discreet and integrated. Available in both metal and wood coverpole options.



LAYERED SHADING

Double Edge systems are available, allowing layered curtains for privacy and shading control.



DETAILED TO THE EDGE

The unique Edge bracket design gives a structured return to the wall for curtains and incorporates an adjustable return-to-wall hook eye.





OIL RUBBED

Deep and dramatic, Oil Rubbed delivers a rich, dark surface, with subtle undertones evoking craftsmanship.

WAXED

Dark finish with a gentle sheen. Waxed steel combines durability with understated refinement.

The soft lustre adds warmth and sophistication to all schemes.

CARBON

Striking in depth, Carbon steel offers a sleek, near-black finish with a contemporary edge.

Minimalist and architectural, it provides a strong design statement.



POLISHED

Highly reflective. Polished 304 Stainless Steel radiates precision and modern luxury.

This finish accentuates clean lines and creates a luminous statement.

MATTE

Matte 304 Stainless Steel softens reflections for a calm, architectural feel.

Its smooth, muted surface makes it a versatile choice across modern interiors.

BRUSHED

Defined by linear texture. Brushed 304 Stainless Steel offers a satin finish that strikes a balance between elegance and practicality.

A timeless finish.




Brushed 304

AUTHENTIC BRASS

Crafted from real, solid brass - a material long associated with heritage, quality and timeless luxury.

Each finish celebrates the natural beauty of brass, from the luminous glow of polished surfaces to the subtle depth of brushed and aged treatments.

Sealed in a clear ceramic coating for durability.

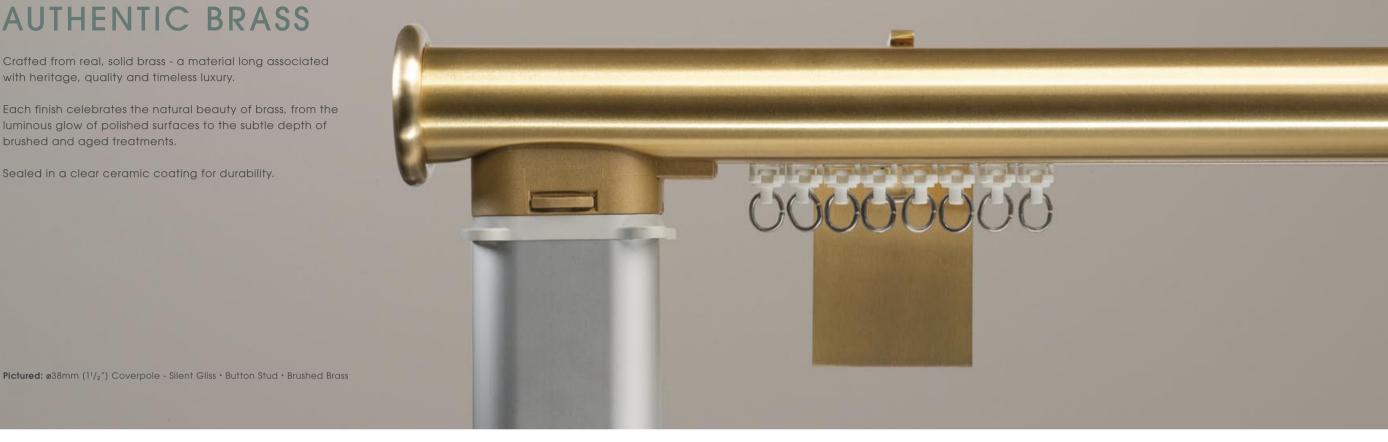

POLISHED BRASS

A timeless, mirror-like finish that radiates luxury. Polished Brass brings a luminous golden tone.

Ideal for interiors that demand refinement and shine.

MATTE BRASS

A contemporary interpretation on brass, with a soft, understated surface that diffuses light beautifully.

Perfect for modern schemes seeking warmth without glare.

BRUSHED BRASS

The subtle texture of Brushed Brass delivers a sophisticated, tactile finish.

Its satin sheen balances elegance with restraint, making it versatile across styles.



Polished Brass (2)



Matte Brass 🕘



Brushed Brass (2)

AGED BRASS

Rich, mellowed tones that capture the depth and character of time-worn brass.

Aged Brass offers heritage appeal with a luxurious, lived-in quality.

BRUSHED BRONZE

A darker, brushed brass that exudes strength and warmth.

Brushed Bronze delivers depth and richness, with a soft reflective quality.

MOCHA BRONZE

An indulgent, waxed brass with deep chocolate undertones.

Mocha Bronze offers a refined, modern alternative to traditional dark metals.



Aged Brass ①



Brushed Bronze (2)



Mocha Brass (2)

#IELEVATE



SOLID WOOD FINISHES

Our solid woods edit celebrates the true character of this organic material.

STAINS

Our curated range of stains enhances the natural beauty of ash, accentuating its grain, while offering distinctive tones from light linen, to the depth of Jet.







Linen ② Stain over ash

Honey @ Stain over ash

Jacobean[®] Stain over ash

Jet@ Stain over ash

NATURALS

When authentic solid wood is required, Naturals celebrates the inherent beauty of Ash, Oak, Cherry & Walnut - each with its own distinctive grain, tone and depth.









Ash⊙

Cherry⊕ ②

Walnut⊕⊕



FINIALS

This design edit provides a versatile solution for any project.

Sharp geometric forms give Elevate a modern persona, while softer rounded details offer a more classic sensibility reimagined with a contemporary hand.

Flush End Cap® Supplied as standard

ø38mm (1½") Inclusive Length 6mm (¼")

ø50mm (2") Inclusive Length 6mm (¼")

Flush Stud For wooden coverpoles only

ø50mm (2") Inclusive Length 8mm (5/16")



ø50mm (2") Inclusive Length 23mm (1/8")

Contrast Stud

ø38mm (1½") **Inclusive Length** 20mm (13/16")

ø50mm (2") Inclusive Length 23mm (1/8")



ø50mm (2") Inclusive Length 59mm (25/16")

Faceted Disc

ø38mm (1½") Inclusive Length 45mm (1¾")

ø50mm (2") Inclusive Length 59mm (25/16")



ø50mm (2") Inclusive Length 106mm (43/6")

ø38mm (1½") Inclusive Length 86mm (3¾")

ø50mm (2") Inclusive Length 106mm (43/16")



ø38mm (1½") Inclusive Length 7mm (¼") **ø**50mm (2") **Inclusive Length** 8mm (5/16")



ø38mm (1½") Inclusive Length 58mm (25/16") ø50mm (2") Inclusive Length 69mm (211/16")



ø50mm (2") Inclusive Length 106mm (4³/₁₆")



ø38mm (1½") Inclusive Length 9mm (3/8") ø50mm (2") Inclusive Length 10mm (3%")



ø50mm (2") **Inclusive Length** 69mm (211/16")



• Please note that if this option is only availble on metal coverpoles. If selected finials cannot be added at a later date. For full technical information, sizes and weights please download the specification guide - www.bradleycollection.com/downloads/

ø50mm (2") Inclusive Length 106mm (4³/₁₆")

BRACKET OPTIONS

SINGLE /	For straightforward app	plications.		
Side		Metal Coverpole Diameter	Projection from wall to track centre	Fixing plate size
		ø38mm (1½") ø50mm (2")	100mm (4") 100mm (4")	w52mm (2½°″) x ห104mm (4½° w52mm (2½°″) x ห104mm (4½°
		Wood Coverpole Diameter	Projection from wall to track centre	Fixing plate size
		ø50mm (2")	100mm (4")	w52mm (21/16") x н104mm (41/8
Mid	Mid - Joining	Metal Coverpole Diameter	Projection from wall to track centre	Fixing plate size
1	The same of the sa	ø38mm (1½") ø50mm (2")	100mm (4") 100mm (4")	w104mm (41/s") x н52mm (21/16 w104mm (41/s") x н52mm (21/16
		Wood Coverpole Diameter	Projection from wall to track centre	Fixing plate size
		ø50mm (2″)	100mm (4")	w104mm (41/в") х н52mm (21/16
Flush	Flush - Joining	Metal Coverpole Diameter	Drop from ceiling to top of pole	Fixing plate size
	4	ø38mm (1½″) ø50mm (2″)	3mm (1/6") 3mm (1/6")	w70mm (2¾") x н34mm (1¾6" w70mm (2¾") x н34mm (1¾6"
d	1	Wood Coverpole Diameter	Projection from wall to track centre	Fixing plate size

DOUBLE Designed for layered shading.

Mid - Joinina

Metal Coverpole Diameter

ø50mm (2")

Fø38mm (1½") Bø38mm (1½") Fø38mm (1½") B Uncovered track **гø**50mm (2") **вø**38mm (1½") **гø**50mm (2") **вø**50mm (2") Fø50mm (2") B Uncovered track

Wood Coverpole Diameter

Fø50mm (2") Bø50mm (2") Fø50mm (2") B Uncovered track

Projection from wall to track centre

F160mm (65%") B60mm (2%") F160mm (65%") B60mm (2%") F160mm (65%") B60mm (23%") F160mm (65%") B60mm (23%")

100mm (4")

F160mm (65%") B 60mm (2%")

F160mm (65%") B60mm (2%") F160mm (65%6") B60mm (2%")

Projection from wall to track centre

Projection from wall to track centre

F160mm (65%") B60mm (2%") w104mm (4%") x H52mm (21/6") w104mm (4%") x н52mm (2%6") w104mm (4%") x н52mm (2%6") w104mm (4\%") x H52mm (2\%6") F160mm (65%") B60mm (23%") w104mm (4\%") x H52mm (2\%")

Wood Coverpole Diameter

гø50mm (2") **вø**38mm (1½")

Fø50mm (2") Bø50mm (2")

Fø50mm (2") Bø50mm (2") Fø50mm (2") B Uncovered track

Fø50mm (2") B Uncovered track

Fø38mm (1½") B Uncovered track

Metal Coverpole Diameter Fø38mm (1½") Bø38mm (1½")

F160mm (65%") B60mm (2%") F160mm (65%") B60mm (2%") F160mm (65%") B60mm (2%")

Projection from wall to track centre

F160mm (65%6") B60mm (23%") F160mm (65%") B60mm (2%") 41/8") 41/8")

41/8")

21/16") 1/16")

21/16")

/16") 716")

Fixing plate size

w70mm (23/4") x H34mm (15/16")

w52mm (2%6") х н104mm (4%")

w52mm (2\%") x H104mm (4\%")

w52mm (21/16") х н104mm (41/8")

w52mm (21/16") x н104mm (41/8")

w104mm (4%") x H52mm (21/6")

w104mm (4\%") x H52mm (2\%")

EDGE A modern interpretation of French returns.

Single - End⊕



Metal Coverpole Diameter

ø38mm (1½") ø50mm (2")

Wood Coverpole Diameter

ø50mm (2")

Projection from wall to track centre

100mm (4") 100mm (4")

Projection from wall to track centre

100mm (4")

Fixing plate size

w52mm (21/6") x H104mm (41/8") w52mm (2½6") х н104mm (4½")

Fixing plate size

w52mm (21/16") х н104mm (41/8")

Double - End®



Diameter

Wood Coverpole Diameter

Fø38mm (1½") Bø38mm (1½") **гø**50mm (2") **вø**38mm (1½")

гø50mm (2") **вø**50mm (2")

Fø50mm (2") Bø50mm (2")

Projection from wall to pole centre

F160mm (65/16") B60mm (23/8") F160mm (65%") B 60mm (23%")

F160mm (65/16") B 60mm (23/8") Projection from wall to track centre

F160mm (65%") B 60mm (23%")

Fixing plate size

w52mm (21/6") х н104mm (41/6") w52mm (21/6") х н104mm (41/6")

w52mm (2%6") x н104mm (4%")

Fixing plate size

w52mm (21/16") x H104mm (41/4")

CUSTOM BRACKETS Designed to suit any window. (5)

Custom Fixing Plate

Custom Projection



Specify the exact projection needed.



Relevant where space is restricted or weight is a concern.

Helps negotiate cornice & similar architectural features.

Ceiling Brackets



Specify exact drop required from ceiling.

Angled Brackets



The solution for tight and awkward locations.



- Handed Item Left and Right version available
- G Custom Brackets shown are for illustration purposes. Brackets are designed on a project basis to specific requirements.

For full technical information, sizes and weights please download the specification guide -www.bradleycollection.com/downloads/

POWERED BY



Key features

Power Options: Mains powered Maximum length: 12 Metres (39ft)⊕ Suitable for Bay Windows: \checkmark

Header types: Standard, S-Fold and Ripplefold® Motor Position: In-line or perpendicular to pole

Manual operation during power failure: 🗸 Noise level at 1000mm (3'): <44dBA

Control Options: Lutron® QS Home Wireless Remote & App Control

Home automation systems

MOTOR OPTIONS

4 D105



Requires professional installation.

Power Type: Mains power

Control Type: Wired or Remote via Radio donale

Maximum length: 9M (29.6ft).

Maximum weight load: 48kg (105lb).

Colour: White

4 D145



Requires professional installation.

Power Type: Mains power

Control Type: Wired or Remote via Radio donale

Maximum length: 9M (29.6ft).

Maximum weight load: 66kg (145lb).

Colour: White

4 D175



Requires professional installation.

Power Type: Mains power

Control Type: Wired or Remote via Radio donale

Maximum length: 12M (39ft). Maximum weight load: 79kg (175lb) .

Colour: White

CONTROL OPTIONS

Remote Controls

Pico

Single channel hand held remote control options available.

App Controls **RA2 Select Hub**

Lutron shading systems can be controlled via Lutron App or through smart devices.

Automation systems

The system can also be integrated with all major home control systems.®











Protocol: Sivoia QS wireless system Channels: 1

Frequency: 433MHz Colour: White

Compatibily: Alexa • Google Home Frequency: 433MHz • 868MHz

Protocol: Sivoia QS wireless system

Colour: Black

4 Mains Power | ② Specialist support & additional components required

▲ Weight restrictions apply to gliding type & application. For full technical information please refer to the specification guide. www.bradleycollection.com/downloads/

GLIDING OPTIONS

Rollers **S-Fold Rollers** Ripplefold® Rollers

For standard headings.

Drop (7/16") Colour: White

For use with wave-style tape,

Drop3:15mm (%16") **S-Fold Pitch**: 60mm (23/8") • 80mm (31/8") Colour: White

For use with Graber or Kirsch snap tape.

Drop3: 16mm (%") Ripplefold® Fullness: 80% • 100% • 120%


Colour: White

(9) Glider/Roller drop from bottom of profile to bottom of eyelet • Ripplefold drop from bottom of profile to centre of eyelet

COVERPOLE

Poles are cut and bent to suit individual requirements. When calculating the length of your pole, remember to allow tolerance beyond the width of the frame for the curtains to stack back to the edge of the window.

Poles exceeding the maximum length will be cut into equal parts unless otherwise specified. A joining bracket will need to be specified.

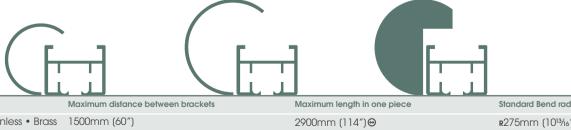

ize	Maximum distance between brackets	Maximum length in one piece	Standard Bend radius
38mm (1½") Steel • Stainless • Brass	1500mm (60")	2900mm (114″)⊖	R 275mm (10 ¹³ /16″)⊗
50mm (2") Steel • Stainless • Brass	1500mm (60")	2900mm (114″)⊖	R 275mm (10 ¹³ /16″)⊗
50mm (2") Wood	1500mm (60")	2400mm (94 ½")	R 275mm (10 ¹³ /16")



Key features

Power Options: Battery & Mains powered Maximum length: 12 Metres (39ft)⊖ Suitable for Bay Windows: ✓⊗⊗

Header types: Standard, Ripple and Ripplefold®

Touch and go operation: ✓

Manual operation during power failure: 🗸 Noise level at 1000mm (3'): <44dBA

Control Options: Wireless & App Control via RTS or Zigbee 3.0

Home automation systems

MOTOR OPTIONS



Requires professional installation.

Power Type: Mains

Motor Type: WT • RTS • Zigbee 3.0 Maximum length: 12M (39ff).

Maximum weight load: 60kg (132lb).

Irismo 45 WF



Requires no pre-wiring.

Power Type: Battery Control Type: RTS

Maximum length: 10M (33ft)



Power Type: Mains

Maximum length: 10M (33ft). Maximum weight load: 45kg (99lb).

♠ Movelite 35



Requires professional installation.

Control Type: WT • RTS

Maximum weight load: 35kg (77lb).

■ Movelite 35 WF[®]



Requires no pre-wiring.

Power Type: Battery Control Type: RTS

Maximum length: 6M (19ft).

Maximum weight load: 35kg (77lb).

Rollers

GLIDING OPTIONS

For standard headings. **Drop** (13/16") Colour Options: White • Black

COVERPOLE

A joining bracket will need to be specified.

ø38mm (11/2") Steel • Stainless • Brass 1500mm (60")

ø50mm (2") Steel • Stainless • Brass

ø50mm (2") Wood

For use with wave-style tape.

Poles are cut and bent to suit individual requirements. When calculating the length of your pole, remember to allow tolerance

Drop@: 20mm (13/16") Ripple Pitch: 80mm (3\%") Colour Options: White

Ripple Rollers

For use with Graber or Kirsch snap tape.

Drop (11/16") Ripplefold® Fullness: 80% • 100% • 120%

Colour Options: White

Ripplefold® Rollers

(9) Glider/Roller drop from bottom of profile to bottom of eyelet • Ripplefold drop from bottom of profile to centre of eyelet

beyond the width of the frame for the curtains to stack back to the edge of the window.

1500mm (60")

1500mm (60")

Poles exceeding the maximum length will be cut into equal parts unless otherwise specified.

CONTROL OPTIONS

Remote Controls Situo • Ysia

Single channel & Multi-channel hand held remote control options available.



Protocol: RTS Channels: 1 • 5 Frequency: 433MHz Colour Options: White

Protocol: Zigbee 3.0 Channels: 1 • 5 Frequency: 433MHz Colour Options: White

App Controls Tahoma

Somfy shading systems can be controlled via Tahoma App or through smart devices.



Protocol: RTS • Zigbee 3.0 Compatibily: Alexa • Google Home Frequency: 433MHz • 868MHz Colour Options: White

Automation systems

The system can also be integrated with all major home control systems.®













🗲 Mains Power | 📟 Battery Power | \Theta Movelite 35 WF is not suitable for bay bends | 🕲 Specialist support & additional components required ▲ Weight restrictions apply to gliding type & application. For full technical information please refer to the specification guide. www.bradleycollection.com/downloads/

Maximum distance between brackets Maximum length i



Maximum length in one piece	Standard Bend radius
2900mm (114″)⊖	R 275mm (10 ¹³ %6″)⊗
2900mm (114″)⊖	R 275mm (10 ¹³ %6")⊗
2400mm (94 ½")	R 275mm (10 ¹³ /16")

POWERED BY



Kev features

Power Options: Mains powered - 100-250 AC and/or 24 V DC in one motor

Maximum length: 25 Metres (82ft) (82ft)

Suitable for Bay Windows: \checkmark \otimes

Header types: Standard & Wave®

Motor Position: In-line or perpendicular to pole

Touch and go operation: ✓

Manual operation during power failure: 🗸 Noise level at 1000mm (3'): <36dBA

Control Options: Wireless Remote & App Control

Home automation systems via Silent Gliss Smart

MOTOR OPTIONS

4 9060 Motor



Requires professional installation.

Power Type: Mains AC • DC

Control Type: Main power and/or Dry Contact

Maximum length: 25M (82ff).

Maximum weight load: 65kg (143lb). Colour Options: White • Silver • Black 4 9060 Motor with 11939 Radio module



Requires professional installation.

Power Type: Mains AC • DC

Control Type: SG Control N and/or Dry Contact

Maximum length: 25M (82ft).

Maximum weight load: 65kg (143lb). Colour Options: White • Silver • Black with 11270 Smart module

4 9060 Motor



Requires professional installation.

Power Type: Mains

Control Type: Home Automation via SG Smart

Maximum lenath: 25M (82ft).

Maximum weight load: 65kg (143lb). Colour Options: White • Silver • Black

CONTROL OPTIONS

Remote Controls 11931 • 11932

Single channel & Multi-channel hand held remote control options available.



Protocol: SG Control N Channels: 1 • 6 Frequency: 433MHz Colour Options: White • Black

App Control Move 4.0 11900

9060 Motors are controllable via the Silent Gliss Move® app on smart devices.

Automation systems Silent Gliss Smart

Silent Gliss 9060 motor integrates with major home control systems via SG Smart, @ @



Protocol: SG Control N Frequency: 433MHz • 868MHz Colour Options: Black



Protocol: SG Smart Communication: Two way

GLIDING OPTIONS

Gliders 2C Rollers® Wave® Gliders Wave® 2C Rollers®

For standard headings.

Drop(13/16") Colour Options: White For standard headings.

Drop (13//6") Colour Options: White • Black For use with wave-style tape.

Drop (13/16") Wave Pitch: 60mm (2\%") • 80mm (3\%") Colour Options: White

For use with wave-style tape.


Drop (13/16") Wave Pitch: 60mm (2\%") • 80mm (3\%") Colour Options: White • Black

3 Glider/Roller drop from bottom of profile to bottom of eyelet.

COVERPOLE

Poles are cut and bent to suit individual requirements. When calculating the length of your pole, remember to allow tolerance beyond the width of the frame for the curtains to stack back to the edge of the window.

Poles exceeding the maximum length will be cut into equal parts unless otherwise specified. A joining bracket will need to be specified.

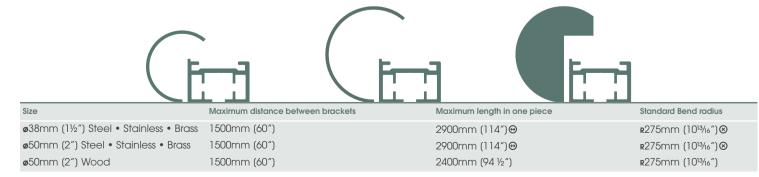

⊕ Supplied in sections - maximum section length UK - 2900mm (1143/16") • Rest of World 2540mm (100") | ⊗ 304 Stainless Steel finishes not available with bends ® Supplied as standard on systems over maximum shipping lengths above.

4 Mains Power | @ Move server set 9960 is required for use with this app | @ Smart only available in United Kingdom, requires Smart Expansion Module | @ Specialist support & additional components required | Meight limits apply to gliding type & application. For full technical information please refer to the specification guide. www.bradleycollection.com/downloads/



LINEAR

Linear 2 transforms an electric track into an architectural feature. The integrated metal cartridge works with engineered motor adaptors, with brackets finished to match for a coordinated finish.

Smart tech meets sharp design.

Pictured: н27mm (11/16") Linear • Powered by Lutron • Raven - Satin

≯|LINEAR(2)

LEADING MOTOR OPTIONS

Linear may be specified with your choice of motors from the leading brands. This provides power and control options ranging from standalone battery powered systems to fully integrated home automation solutions.







FUNCTION

Wall fixed brackets may be specified in a matching track finish, incorporating magnetic cover plates.



METALCOAT DETAILING

The innovative, embedded cartridge is paired with precision engineered metal adaptors finished to match the system. Allowing a single or a twin drive which sit discreetly behind the curtain.



TRUE FLUSH

The direct fix ceiling brackets provide truly flush ceiling mounting.



GLIDING

Gypsum and Anthracite colours offered as standard for gliders. Metalcoat rollers and Metalcoat Ripplefold rollers available for exact colour match. A low-friction channel coating ensures quieter performance.



MODERN HEADINGS

The choice of motor systems means that modern headings can be accommodated, with both Wave® and Ripplefold® styles available.



LAYERED SHADING

Tracks can be supplied to any length Θ , subject to maximum weight loadings of the selected motorised system.



BENT TO SHAPE

A bespoke bay bending and curving service is available on all systems to allow the perfect shaped track to fit any bay window.



All tracks and components may be specified in this stunning palette of colours and finishes, with a choice of coat options throughout.

COAT OPTIONS





High metallic fleck coatings. Available in Satin and Gloss sheen levels.





Platinum ®@ Champagne 99





Gold ®@ Cognac ®®





Antique Brass © ©



Bronzed @ @

Pewter ® ©

SHADES

A superb selection of opaque colours, all available in a choice of Matte, Satin or Gloss finish.



ANODICS

A flat metal colour group, with an anodised style.






CERAMICS

CERAKOTE*

Finished with ceramic Cerakote for industry leading protection and a flawless finish that endures daily life.

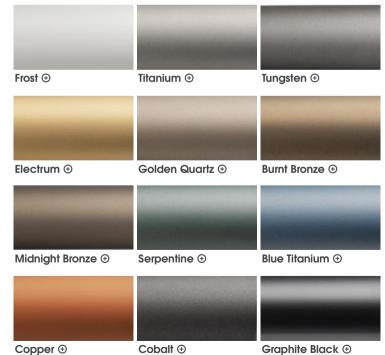

Copper ⊕

BRACKET OPTIONS

SINGLE For straightforward applications.

Projection from wall to track centre 100mm (4")

Side Fixing plate size w40mm (1%6") x H75mm (215/16") Mid Fixing plate size w40mm (1%6") x н36mm (1%6")

Flush Ceiling Kit For direct ceiling fitting.

Drop from ceiling to top of track

0mm (0")

RECESS Designed for rebates.

Recess With hook stop

Depth off wall

14mm (%6")

Fixing plate size

w42mm (111/16") x H27mm (11/16")

ADJUSTABLE Designed to give flexibility during installation.

Projection from wall to track centre Min.80mm (3\%") Max.130mm (5\%")

Side Fixing plate size

w47mm (11/8") x H75mm (215/6")

Mid Fixing plate size

w47mm (1%") x H36mm (1%6")

DOUBLE Designed for layered shading.



Projection from wall to track

F140mm (5½") B40-60mm (1½6-2³/8")

Side Fixing plate size

w47mm (11/8") x H75mm (215/6")

Mid Fixing plate size

w47mm (17/8") x H36mm (17/16")

CUSTOM BRACKETS Designed to suit any window. §

Custom Projection



Specify the exact projection needed. **Custom Fixing Plate**



Relevant where space is restricted or weight is a concern.



Helps negotiate cornice & similar architectural features.

Ceilina Brackets



Specify exact drop required from ceiling. **Analed Brackets**



The solution for tight and awkward locations.

GLIDING OPTIONS

Glider

For standard headings.

Drop (13/16") Colour Options: Gypsum • Anthracite

For standard headings.

Sine Roller

Drop (13//6") Colour Options: Gypsum • Anthracite Metalcoat Roller®

For standard headings.

Drop (13/16") Colour Options: System Colour ®

Metalcoat Sine Roller®

Sine Glider

For use with wave-style tape.

Drop(13/16") Sine Pitch: 80mm (3\%") Colour Options: Gypsum • Anthracite

For use with wave-style tape.

Drop (13/16") Sine Pitch: 60mm (2\%") • 80mm (3\%") Colour Options: System Colour®

For use with wave-style tape.

Drop (13/6") Sine Pitch: 60mm (23/8") • 80mm (31/8") Colour Options: System Colour®

Metalcoat Ripplefold Roller®



For use with snap tape

Drop(13/16") Ripplefold® Fullness: 80% • 100% Colour Options: System Colour®

(9) Glider/Roller drop from bottom of profile to bottom of eyelet • Ripplefold drop from bottom of profile to centre of eyelet

BESPOKE TRACKS

Tracks are cut, bent and curved to suit individual requirements. When calculating the length of your track, remember to allow tolerance beyond the width of the frame for the curtains to stack back to the edge of the window.

Tracks exceeding the maximum length will be cut into equal parts unless otherwise specified. A track joiner will be supplied.



Maximum distance between brackets Maximum length in one piece Standard Bend radius H27mm (11/16") W32mm (11/4") 1000mm (39") 4000mm (157")⊕ **R**275mm (10 ¹³/₁₆")

Double Linear systems may be specified with a motor to front and rear. It is also possible to specify a motor to the main curtain and a manual track to the rear.

Metalcoat Gliders, supplied in satin finish on Matte & Gloss finished systems For finish colour coordination see the specification guide www.bradleycollection.com/downloads/

SYSTEM OPTIONS

Systems can be specified with your preferred motor and control system. Choose drives from Lutron, Somfy or Silent Gliss



Key features

Power Options: Mains powered
Suitable for Bay Windows: ✓
Touch and go operation: X
Manual operation during power failure: ✓
Noise level at 1000mm (3'): <44dBA
Control Options: Lutron® QS Home Wireless Remote & App Control
Home automation systems

MOTOR OPTIONS

4 D105



Requires professional installation.

Power Type: Mains power Control Type: Wired or Remote via Radio dongle Colour: White 4 D145



Requires professional installation.

Power Type: Mains power
Control Type: Wired or Remote via Radio dongle
Colour: White

4 D175



Requires professional installation.

Power Type: Mains power
Control Type: Wired or Remote via Radio dongle
Colour: White

CONTROL OPTIONS

Remote Controls Pico

Single channel hand held remote control options available.



Protocol: Sivoia QS wireless system Channels: 1 Frequency: 433MHz Colour: White

App Controls RA2 Select Hub

Lutron shading systems can be controlled via Lutron App or through smart devices.



Protocol: Sivoia QS wireless system Compatibity: Alexa • Google Home Frequency: 433MHz • 868MHz Colour: Black

Automation systems

The system can also be integrated with all major home control systems.®









somfy.

Key features

Power Options: Battery & Mains powered
Suitable for Bay Windows: ✓ ☺

Touch and go operation: ✓
Manual operation during power failure: ✓
Noise level at 1000mm (3'): <44dBA

Control Options: Wireless & App Control via RTS or Zigbee 3.0

Home automation systems

MOTOR OPTIONS

∳ Glydea Ultra 60e



Requires professional installation.

Power Type: Mains

Motor Type: WT • RTS • Zigbee 3.0



Requires no pre-wiring.

Power Type: Battery Control Type: RTS



Requires professional installation.

Power Type: Mains Control Type: WT • RTS





Requires no pre-wiring.

Power Type: Battery
Control Type: RTS

CONTROL OPTIONS

Remote Controls Situo • Ysia

Single channel & Multi-channel hand held remote control options available.



Protocol: RTS
Channels: 1 • 5
Frequency: 433MHz
Colour Options: White

0 < 4 >

Protocol: Zigbee 3.0 Channels: 1 • 5 Frequency: 433MHz Colour Options: White

App Controls Tahoma

Somfy shading systems can be controlled via Tahoma App or through smart devices.



Protocol: RTS • Zigbee 3.0 Compatibily: Alexa • Google Home Frequency: 433MHz • 868MHz Colour Options: White

Automation systems

The system can also be integrated with all major home control systems.®









★ Mains Power | @ Specialist support & additional components required
 ■ Weight restrictions apply to gliding type & application. For full technical information please refer to the specification guide.
 www.bradleycollection.com/downloads/

SYSTEM OPTIONS

Systems can be specified with your preferred motor and control system. Choose drives from Lutron, Somfy or Silent Gliss



Key features

Power Options: Mains powered - 100-250 AC and/or 24 V DC in one motor Suitable for Bay Windows: \checkmark Touch and go operation: \checkmark Manual operation during power failure: \checkmark Noise level at 1000mm (3'): <36dBA

Control Options: Wireless Remote & App Control

Home automation systems via Silent Gliss Smart

MOTOR OPTIONS

4 9060 Motor



Requires professional installation.

Power Type: Mains AC * DC
Control Type: Main power and/or Dry Contact
Colour Options: White * Silver * Black



Requires professional installation.

Power Type: Mains AC * DC

control Type: SG Control N and/or Dry Contact

colour Options: White • Silver • Black

4 9060 Motor with 11270 Smart module



Requires professional installation.

Power Type: Mains
Control Type: Home Automation via SG Smart
Colour Options: White • Silver • Black

CONTROL OPTIONS

Remote Controls 11931 • 11932

Single channel & Multi-channel hand held remote control options available.



Protocol: SG Control N Channels: 1 • 6 Frequency: 433MHz Colour Options: White • Black

App Control Move 4.0 11900

9060 Motors are controllable via the Silent Gliss Move® app on smart devices.



Protocol: SG Control N
Frequency: 433MHz • 868MHz
Colour Options: Black

Automation systems Silent Gliss Smart

Silent Gliss 9060 motor integrates with major home control systems via SG Smart.®®



Protocol: SG Smart Communication: Two way



MANUAL

GLIDERPOLE Page:99-114

GLIDE Page:115-130 FLOAT Page:131-142 MIO Page:143-160 ELYSIAN Page:161-172

SIEEL Page:173-190

97



This sophisticated collection is the epitome of modern living. The design is sharp, streamlined and purposeful, whilst the choice of colour and finish ensures a truly individual result.

Streamlined, unmistakably individual


Pictured: Round Ø50mm (2") Gliderpole® - Hand Drawn • Flush Stud • Gold - Gloss Interior design: Jarvis Rayes | @jarvisrayes_interiors | www.jarvisrayes.com Photography: Jake Fitzjones | @jakefitzjonesphotography

100

GLIDERPOLE®

EASIER INSTALLATION

Locating grub screws into the top fixing plate is simplified by our precision T-bar guide. Supplied as a complimentary tool with every Gliderpole order, it accurately aligns the tapped hole with the grub screw. An invaluable aid to installation, particularly in situations with limited or obstructed visibility.

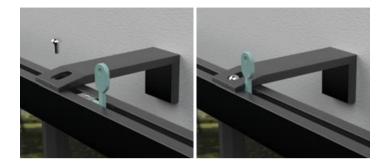

HAND DRAWN

The smooth running hand drawn option is available in five styles. All benefit from considered detailing, including concealed end stops.



CORDED

The innovative, embedded cording solution is available in three options. All options may be specified with a single or twin cord, positioned discreetly behind the curtain.

A colour-matched cord retainer is supplied as standard to ensure child safety compliance.



ANY LENGTH

Gliderpole can be supplied to any length Θ allowing the curtains to travel freely across even the longest systems.



WAVE®

The ubiquitous Wave® heading is accommodated through all Gliderpole options.



BRACKET SUITE

Available in wall, ceiling and double designs for layering.

Adjustable brackets support complex bay window installations, while heavy-duty designs are offered to accommodate larger curtain weights. Custom projections and designs can be supplied.



BENT TO SHAPE

Gliderpole is the optimal solution for bends and curves. Precision bending and smooth running gliding systems combine to provide superb functionality.





GLIDERPOLE®

EDGE

Gliderpole Edge is a modern, clean cut, return-to-wall concept with a more linear aesthetic.

The unique Edge bracket design gives a structured return to the wall for drapes and incorporates an adjustable return-to-wall hook eye.

Available in \emptyset 30mm (1 $^3/_{16}$ ") hand drawn.






FINISHES

This stunning palette of colours and finishes is available on all Gliderpoles and components, with a choice of coat options throughout.

SHADES

A superb selection of opaque colours, all available in a choice of Matte, Satin or Gloss finish.



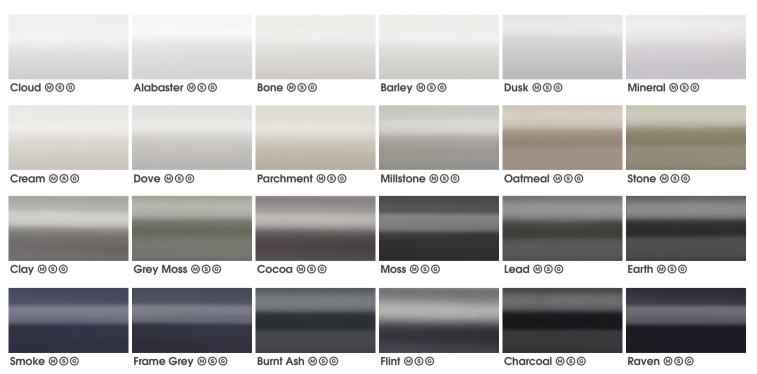

METALLICS

High metallic fleck coatings with most available in Satin and Gloss sheen levels.



ANODICS

A flat metal colour group, with an anodised style.




BRIGHTS

Gliderpole may be specified in bright aluminium finish, complemented by finials, brackets and components in a plated, Polished Nickel Finish.



POLE ONLY FINISH


NLY COMPONENT ONLY FINISH





Bright Aluminium $\oplus \otimes$

Polished Nickel ⊕ ⊕

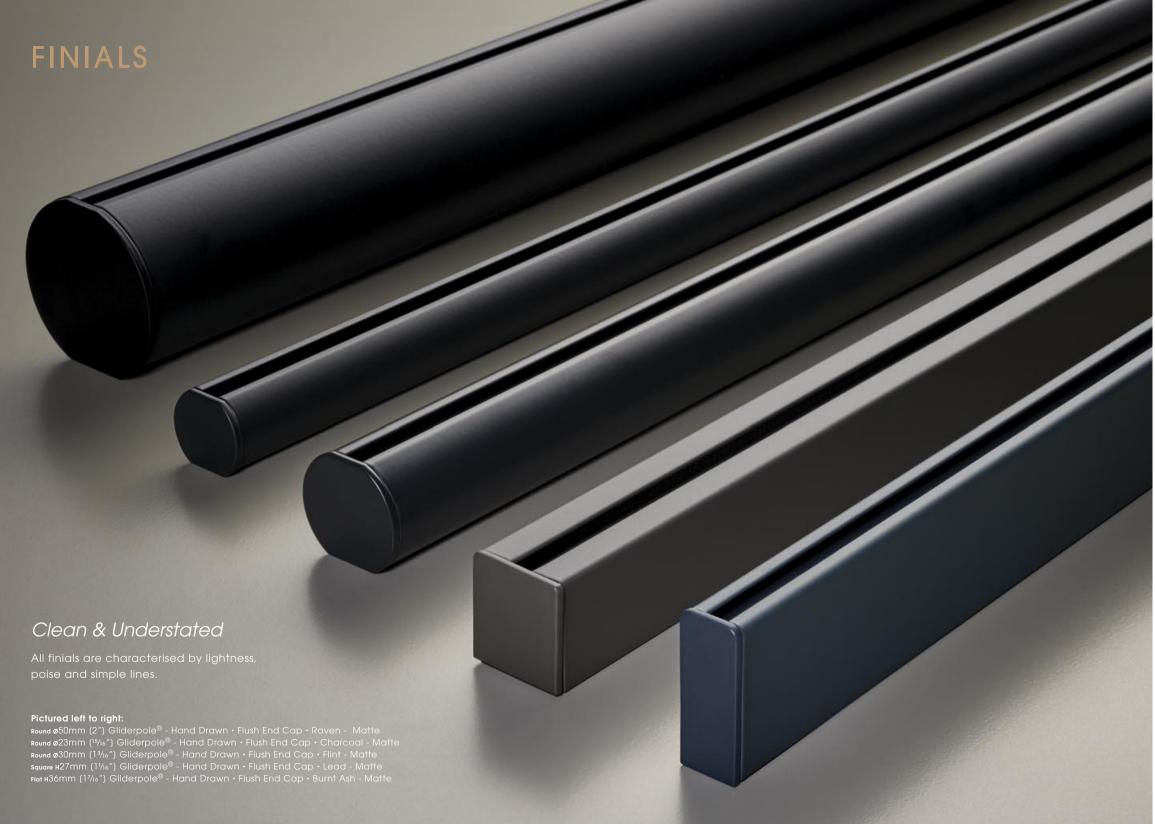



Flush End Cap Supplied as standard

Square H27mm (11%") Inclusive Length 3mm (1%") Flat H36mm (17%") Inclusive Length 3mm (1%") Round Ø23mm (15%") Inclusive Length 3mm (1%") Round Ø30mm (13%") Inclusive Length 3mm (1%") Round Ø50mm (2") Inclusive Length 3mm (1%")



Flush Stud

square H27mm (1%") Inclusive Length 12mm (%") Flat H36mm (1%") Inclusive Length 12mm (%") Round Ø23mm (1%") Inclusive Length 10mm (%") Round Ø30mm (1%") Inclusive Length 12mm (%") Round Ø50mm (2%") Inclusive Length 18mm (1%")



Stud

 $\label{eq:Round g23mm (15/6") Inclusive Length 10mm (\%") Round g30mm (13%") Inclusive Length 12mm (½") Round g50mm (2") Inclusive Length 18mm (1\%")$



Disc

Round ø23mm (15%") Inclusive Length 10mm (3%") Round ø30mm (13%") Inclusive Length 12mm (½") Round ø50mm (2") Inclusive Length 18mm (11%")



Squat Disc

Round ø30mm (1%6") Inclusive Length 32mm (1%4") Round ø50mm (2%6 Inclusive Length 58mm (2%6")



Faceted Disc

Round ø 30mm (11% ") Inclusive Length 37mm (11/2") Round ø 50mm (2") Inclusive Length 69mm (211% ")



Pebble

Round ø30mm (1%) Inclusive Length 42mm (1%) Round ø50mm (2%) Inclusive Length 68mm (2%)



Ball

Round ø30mm (13%") Inclusive Length 66mm (25%") Round ø50mm (2") Inclusive Length 112mm (47%")

For full technical information, sizes and weights please download the specification guide www.bradleycollection.com/downloads/





Halo

Discus

ø30mm (1%6") Inclusive Length 39mm (1½")

ø50mm (2") Inclusive Length 58mm (25/16")

Squat Globe

ø30mm (13/6") **Inclusive Length** 53mm (21/6")

ø50mm (2") Inclusive Length 81mm (33/16")



Auro

Jewel

ø30mm (13/6") Inclusive Length 37mm (17/6")

ø50mm (2") Inclusive Length 55mm (21/8")



Orbit

ø30mm (13/6") **Inclusive Length** 36mm (17/16") **ø**50mm (2") **Inclusive Length** 52mm (21/16")



Flute

ø30mm (13%6") Inclusive Length 73mm (27/8") ø50mm (2") Inclusive Length 114mm (4½")



Globe

ø30mm (13/6") Inclusive Length 73mm (21/8") ø50mm (2") Inclusive Length 114mm (41/2")



Templar

ø30mm (1%6") Inclusive Length 79mm (3%") ø50mm (2") Inclusive Length 119mm (411/6")



Ribbed Globe

ø30mm (1%6") Inclusive Length 73mm (2%") ø50mm (2") Inclusive Length 114mm (4½")



Crystal Templar*

ø50mm (2") Inclusive Length 119mm (411/16")

* Crystal Finials should not be positioned in direct sunlight

Charm

ø30mm (13/16") Inclusive Length 69mm (211/16")

ø50mm (2") Inclusive Length 117mm (45%")

BRACKET OPTIONS

SINGLE For straight forward applications.



Projection from wall to pole centre Diameter Square H27mm (11/16") Flat H36mm (17/16")

60mm (2¾")	• 100mm (4")
60mm (2¾")	• 100mm (4")
60mm (2¾")	• 100mm (4")
60mm (2¾")	• 100mm (4")
60mm (2%")	• 100mm (4")

Side Fixing plate size Mid Fixing plate size

-	
w32mm (1¼") x H 70mm (2¾")	w32mm (1¼") x н38mm (1½")
w32mm (1¼") x н70mm (2¾")	w32mm (1¼") x н38mm (1½")
w32mm (1¼") x н70mm (2¾")	w32mm (1¼") x н38mm (1½")
w32mm (1¼") x н70mm (2¾")	w32mm (1¼") x н38mm (1½")
w32mm (1¼") х н70mm (2¾")	w32mm (1¼") x н38mm (1½")

Flush Ceilina **Light Duty**



Drop from ceiling to top of pole Diameter

Square H27mm (1¼6")	3mm (%")
Flat H36mm (11/16")	3mm (%")
Round ø23mm (15/16")	3mm (%")
Round ø30mm (13/16")	3mm (%")

Fixing plate size

W2	20mm	(13/16")	х L 50mm	(2")
W2	20mm	(13/16")	х L 50mm	(2")
W2	20mm	(13/16")	х L 50mm	(2")
W2	20mm	(¹³ / ₁₆ ")	х L 50mm	(2")

SINGLE - HEAVY DUTY For heavier fabrics, where additional support is required.

Round ø23mm (15/16") Round Ø30mm (13/16") Round ø50mm (2")

Side	
Heavy	Dut
	-



iameter	Projection fro
µare H27mm (11/16")	100mm (4")
at H 36mm (17/16")	100mm (4")

Square HZ/MM (17/16)	100mm (4") • 140mm (5½")
Flat H36mm (17/16")	100mm (4") • 140mm (5½")
Round ø23mm (15/16")	100mm (4") • 140mm (5½")
Round Ø30mm (13/16")	100mm (4") • 140mm (5½")

100mm (4") • 140mm (5½")

om wall to pole centre Side Fixing plate size w47mm (11%") x H76mm (3")

v 47mm	(17/8")	х н 76mm	(3")	
v 47mm	(11//8")	х н 76mm	(3")	
v 47mm	(11//8")	х н 76mm	(3")	
47	(17/ ")	7/	(0 //)	

Mid Fixing plate size

w47mm (1%") х н76mm (3")	w47mm (1¾") x н36mm (1¾")
w47mm (1¾") х н76mm (3")	w47mm (11%") x н36mm (11%")
w47mm (1¾") х н76mm (3")	w47mm (11%") x н36mm (11%")
w47mm (1¾") х н76mm (3")	w47mm (1¾") x н36mm (1¾")
w47mm (1%") х н76mm (3")	w47mm (11%") x н36mm (11%")

Flush Ceilina **Heavy Duty**



Diameter

Round ø50mm (2")

Drop from ceiling to top of pole **Square H**27mm (1¼6") 3mm (%") Flat H36mm (17/16") 3mm (%") Round ø23mm (15/16") 3mm (%") Round ø30mm (13/16") 3mm (%") Round ø50mm (2") 3mm (%")

Fixing plate size

٠.				
w40mm	(1%6")	Χ	ւ 59mm	(25/16")
w40mm	(1%16")	Χ	ւ 59mm	(25/16")
w40mm	(1%16")	Χ	ւ 59mm	(25/16")
w40mm	(1%16")	Χ	ւ 59mm	(25/16")
w40mm	(1%6")	Χ	L 59mm	(25/16")

RECESS Designed for rebates.





Diameter Depth off wall

Square H27mm (11/16")	14mm (%6")
Flat H36mm (17/16")	14mm (%6")
Round ø23mm (15/16")	14mm (%6")
Round ø30mm (13/16")	14mm (%6")
Round ø50mm (2")	14mm (%6")

Fixing plate size

31	
w42mm	(1¼6″) х н 27mm (1¼6″)
w31mm	(1¼") x н 36mm (1¾6")
w33mm	(15%") x H 24mm (115%")
w40mm	(1%4") x H 31mm (1¼")
w64mm	(2½") x H 51mm (2")

EDGE A modern interpretation of French returns.

End⊕



Projection from wall to pole centre Diameter

Round ø30mm (13/16") 100mm (4")

Fixing plate size

w32mm (11/4") x H70mm (23/4")

ADJUSTABLE Designed to give flexibility during installation.





Flat H36mm (17/16") Round ø50mm (2")

Square H27mm (11/16") **Min.**80mm (31/8") **Max.**130mm (51/8") Min.80mm (3\%") Max.130mm (5\%") Round Ø23mm (15/16") Min.80mm (31/8") Max.130mm (51/8") Round ø30mm (13%") Min.80mm (3%") Max.130mm (5%") Min.80mm (31/8") Max.130mm (51/8")

Projection from wall to pole centre

Projection from wall to pole centre


Side Fixing plate size Mid Fixing plate size w47mm (11/8") x н76mm (3") w47mm (11/8") x н36mm (11/16") w47mm (11/8") x H76mm (3") w47mm (11/8") x H36mm (11/16") w47mm (11/8") x H76mm (3") w47mm (11/8") x H36mm (11/16") w47mm (1%") x H76mm (3") w47mm (1%") x H36mm (1%")

w47mm (1%") x H76mm (3") w47mm (1%") x H36mm (1%")

DOUBLE Designed for layered shading.







F140mm (5½") в 40-60mm (1½6-2³/в") w47mm (Round Ø23mm (15/16") F140mm (51/2") B 40-60mm (11/16-23/18") W47mm (Round Ø30mm (13/6") F140mm (5½") B 40-60mm (11/6-23/8") W47mm (

Side Fixing plate size Mid Fixing plate size

(1%") x H 76mm (3")	w47mm (1%") x н36mm (1%6")
(1%") х н 76mm (3")	w47mm (1%") х н36mm (1%6")
(1%") х н 76mm (3")	w47mm (1%") х н36mm (1%6")
(1%") х н 76mm (3")	w47mm (1%") х н36mm (1%6")
(17%") v µ76mm (3")	w/7mm (17/4") x H36mm (17/4")

CUSTOM BRACKETS Designed to suit any window. §

Custom Projection

Specify the exact

projection needed.





Relevant where space is

restricted or weight is a

concern.

Custom Fixing Plate



features.

Helps negotiate cornice

& similar architectural

Specify exact drop required from ceiling.

Ceiling Brackets

Angled Brackets



The solution for tight and awkward locations.

- Handed Item Left and Right version available
- Gustom Brackets shown are for illustration purposes. Brackets are designed on a project basis to specific requirements.

GLIDING OPTIONS



3 Glider/Roller drop from bottom of profile to bottom of eyelet

POLES


Poles are cut, bent and curved to suit individual requirements When calculating the length of your pole, remember to allow tolerance beyond the width of the frame for the curtains to stack back to the edge of the window.

Poles exceeding the maximum length will be cut into equal parts unless otherwise specified. A pole joiner will be supplied.

Twin cord systems are always supplied in an even number of parts & will be supplied in a minimum of two sections.



ACCESSORIES

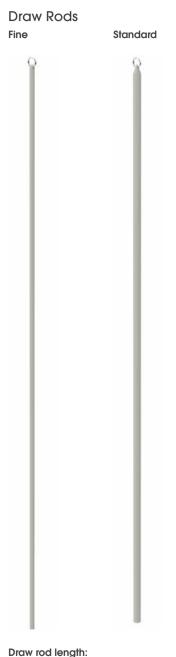


1000mm (39³/₈") Custom lengths available to order

Cord Retainer

All corded tracks are supplied as standard with a regional compliant retainer. This ensures that all cords are safely secured to the wall for child safety.

This will be supplied in the same finish as the system, unless advised otherwise.



UK & European Retainer BS EN 13120:2009+A12014 Compliant

Fixing plate size: ø46mm (113/16")

North America Retainer 2022 ANSI/WCMA Compliant

Fixing plate size:

w30mm (13/6") x L76mm (3")

Cord Colour

Cord systems come as standard with white cord. A black option is available on request.







This collection sets a benchmark in drapery hardware. Hidden brackets, seamless joins, and perfectly matched pole and glider colours create a unified elevated aesthetic.

Pure Refinement, Perfectly concealed

Pictured: Round ø38mm (1½") Pole • Seamless • Charcoal - Matte

GLIDE

SEAMLESS END

Precision engineering achieves an uninterrupted, seamless end.




QUIET RUNNING Within the channel, a low-friction

Within the channel, a low-friction coating works alongside improved roller and metal-coated roller designs to ensure quieter performance.




CONCEALED BRACKETS

The bracket architecture is shared with Float and Drive, and keeps the front face of the pole clear of visible parts.

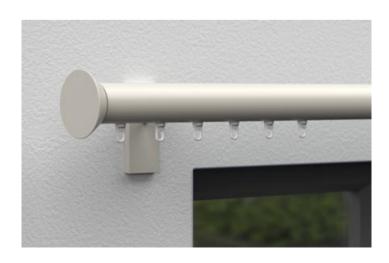


PRECISE JOINING

Innovative jointing ensures seamless, precision alignment between pole sections.

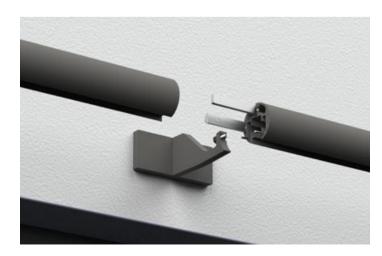

METALCOAT DETAILS

Glide includes optional Metalcoat gliding components, for an exact colour match to the pole.

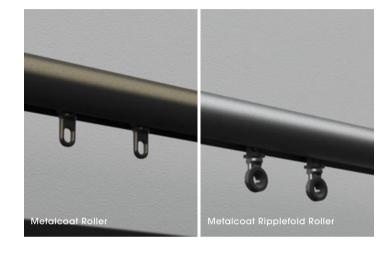

RIPPLEFOLD OR SINE

Modern sinuous heading styles can be created, using both hook and tape or snap tape components.



FLUSH CEILING

The rear fixing brackets allow for true flush ceiling installation.



BENT TO SHAPE

Glide profile can be accurately bent and curved to shape, with optional adjustable brackets, delivering installation flexibility.



FINISHES

Glide offers a striking palette of finishes, with a refined range of coat options to suit every scheme.

SHADES


A superb selection of opaque colours, all available in a choice of Matte, Satin or Gloss finish.





ORGANICS

A textured finish, inspired by nature.



METALLICS

High metallic fleck coatings. Available in Satin and Gloss sheen levels.



ANODICS

A flat metal colour group, with an anodised style.






Pictured: ø38mm (1½") Pole • Drum • Metalcoat Gliders • Electrum

CERAMICS

CERAKOTE

Copper ⊕

Finished with ceramic Cerakote for industry leading protection and a flawless finish that endures daily life.

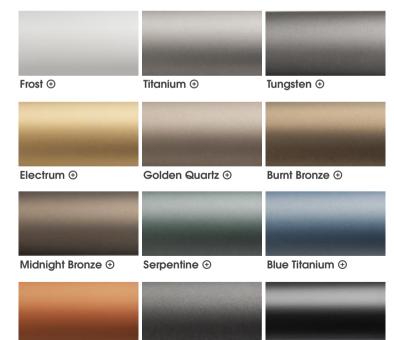

Cobalt ⊕

Graphite Black ⊕


CHROMATICS


Brushed and etched aluminium, elevated with modern tints. Understated luxury with an architectural edge.

Sealed in a clear, ceramic coating for lasting durability.



Pictured: ø38mm (1½") Pole · Planar · Metal Coat Gliders · Etched Brass

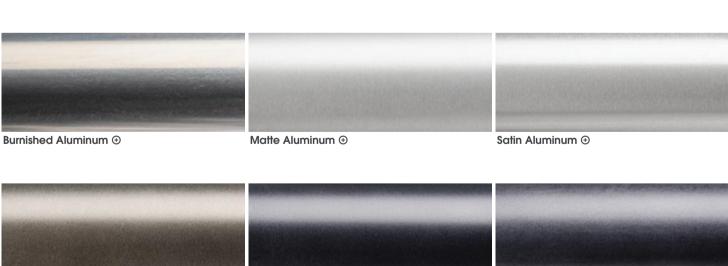

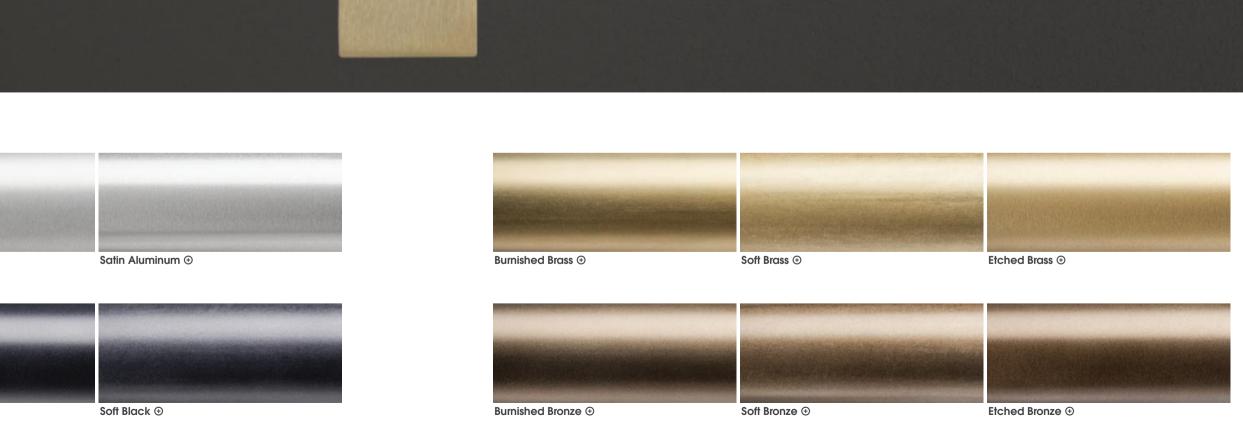

Etched Graphite ⊕

Etched Black ⊕

Pictured: ø30mm (13/16") Pole • Seamless • Metalcoat Gliders • Antique Brass - Satin

FINIALS

Glide's continuous ends express a seamless, contemporary aesthetic. The Seamless end cap is supplied as standard, creating pure, minimalist lines.

For added refinement, understated geometric finials introduce a hint of decorative detail.



Seamless® Supplied as standard

ø30mm (1%") Inclusive Length 5mm (%6") ø38mm (1%2") Inclusive Length 5mm (%6")



Orbic.

ø30mm (13/6") Inclusive Length 13mm (½") **ø**38mm (1½") Inclusive Length 15mm (%6")



Orbic Grand

ø30mm (13/16") Inclusive Length 13mm (½") ø38mm (1½") Inclusive Length 15mm (%6")



Drum

ø30mm (13%6") Inclusive Length 21mm (13%6") ø38mm (11½") Inclusive Length 23mm (7%")



Tulip

ø30mm (1%6") Inclusive Length 35mm (1%") **ø**38mm (1½") Inclusive Length 43mm (1½")



Oblique

ø30mm (1%6") Inclusive Length 21mm (1%16") ø38mm (1½") Inclusive Length 23mm (%")



ø30mm (11%;") Inclusive Length 25mm (1") ø38mm (11/2") Inclusive Length 29mm (11/8")



ø30mm (1%") Inclusive Length 29mm (1%") ø38mm (1½") Inclusive Length 33mm (1%")



Spheric

ø30mm (1%") Inclusive Length 53mm (2%") **ø**38mm (1½") Inclusive Length 65mm (2%")

Please note that if this option is selected finials cannot be added at a later date. | Removable version available on request, Pole is supplied without seamless option or access ports.

For full technical information, sizes and weights please download the specification guide - www.bradleycollection.com/downloads/

BRACKET OPTIONS

SINGLE For straightforward applications.



Diameter

ø30mm (13/6") ø38mm (1½")

Projection from wall to pole centre

60mm (2\%") • 100mm (4") 100mm (4")

Fixing plate size

w30mm (13/6") x H70mm (23/4") w38mm (1½") х н89mm (3½")

Mid



Diameter

ø30mm (13/16") ø38mm (1½")

Projection from wall to pole centre

60mm (2%") • 100mm (4") 100mm (4")

Fixing plate size

w70mm (23/4") x H30mm (13/6") w89mm (3½") x **H**38mm (1½")

Flush Ceiling



Diameter

ø30mm (13/6") ø38mm (1½")

Drop from ceiling to top of pole

7mm (1/4") 7mm (1/4") Fixing plate size

w70mm (23/4") x H30mm (13/6") w70mm (23/4") x H30mm (13/6")

RECESS Designed for rebates.

Recess With hook stop



Diameter

ø30mm (13/6") ø38mm (1½")

Depth off wall

10mm (%") 10mm (3/8") Fixing plate size

ø38mm (1½")

ø48mm (11/16")

ADJUSTABLE Designed to give flexibility during installation.



Diameter

ø30mm (13/16") ø38mm (1½")

Projection from wall to pole centre

Min.90mm (3\%") Max.110mm (4\%") Min.90mm (3\%") Max.110mm (4\%") Fixing plate size

w38mm (1½") x H70mm (2¾") w46mm (1¹³/₁₆") х н89mm (3½")



Diameter

ø30mm (13/16") ø38mm (1½")

Projection from wall to pole centre

Min.90mm (3%6") Max.110mm (45/16") Min.90mm (3%6") Max.110mm (45/16") Fixing plate size

w70mm (23/4") x H30mm (13/6") w89mm (3½") х н38mm (1½")

DOUBLE Designed for layered shading.



Diameter

Fø30mm (13/6") Bø30mm (13/6") Fø38mm (1½") Bø30mm (1¾6") Fø38mm (1½") Bø38mm (1½")

Projection from wall to pole centre

F160mm (65%") B 60mm (23%") F160mm (65/16") B 60mm (23/8") F160mm (65%") B 60mm (23%") Fixing plate size

w57mm (21/4") x H114mm (41/2") w57mm (2¼") x H114mm (4½") w57mm (21/4") x H114mm (41/2")



Diameter

Fø30mm (13/6") Bø30mm (13/6") Fø38mm (1½") Bø30mm (1¾6") Fø38mm (1½") Bø38mm (1½")

Projection from wall to pole centre

F160mm (65%") B60mm (23%") F160mm (65/16") B 60mm (23/8") F160mm (65%6") B60mm (23%") Fixing plate size

w114mm (4½") x **H**57mm (2½") w114mm (4½") x **H**57mm (2¼") w114mm (4½") x H57mm (2¼")

Flush Partition



Diameter

Fø30mm (13/6") Bø30mm (13/6") Fø38mm (1½") Bø38mm (1½")

Drop from ceiling to top of pole

7mm (1/4") 7mm (1/4") Fixing plate size

w89mm (3½") х н38mm (1½") w89mm (3½") x н38mm (1½")

CUSTOM BRACKETS Designed to suit any window. §

Custom Fixing Plate



Custom Projection

Specify the exact projection needed.

Relevant where space is restricted or weight is a concern.



Helps negotiate cornice & similar architectural features.

Ceiling Brackets



Specify exact drop required from ceiling. **Angled Brackets**



The solution for tight and awkward locations.

GLIDING OPTIONS



For standard headings.

Drop@: 15mm (5%") Colour Options: Gypsum • Anthracite For standard headings.

Drop15mm (5%") Colour Options: Gypsum • Anthracite For standard headings.

Drop③: 15mm (%") Colour Options: System Colour®

Sine Glider







Metalcoat Ripplefold Roller®



For use with wave-style tape.

Drop③: 15mm (5%") Sine Pitch: 80mm (31/8") Colour Options: Gypsum • Anthracite For use with wave-style tape.

Drop③: 15mm (5%") Colour Options: Gypsum • Anthracite For use with wave-style tape.

Drop15mm (5%") Sine Pitch: $60mm (2\%") \cdot 80mm (3\%")$ Sine Pitch: $60mm (2\%") \cdot 80mm (3\%")$ Colour Options: System Colour®

For use with snap tape.

Drop③: 18mm (11/16") Ripplefold® Fullness: 80% • 100% Colour Options: System Colour®

3 Glider/Roller drop from bottom of profile to bottom of eyelet • Ripplefold drop from bottom of profile to centre of eyelet.

(9) Metalcoat Gliders, supplied in satin finish on Matte & Gloss finished systems

POLES

Poles are cut, bent and curved to suit individual requirements. When calculating the length of your pole, remember to allow tolerance beyond the width

of the frame for the curtains to stack back to the edge of the window.

Poles exceeding the maximum length will be cut into equal parts unless otherwise specified. A pole joiner will be supplied.





	Size	Maximum distance between brackets	Maximum length in one piece	Standard Bend radius
ø 38mm (1½°) 1000mm (39°) 4000mm (157″)⊕ R 400mm (16°	ø30mm (1¾6")	1000mm (39")	4000mm (157")⊖	r250mm (10")
	ø38mm (1½")	1000mm (39")	4000mm (157")⊖	r400mm (16")

© Supplied in sections - Section lengths over 3.0m (118") will incur a handling charge
For full technical information, sizes and weights please download the specification guide - www.bradleycollection.com/downloads/

ACCESSORIES

Draw Rods Seamless



Draw rod length: 1000mm (393/8")

Custom lengths available to order



4 (POLE

ePole is a plug-and-play curtain pole with a quiet, powerful motor and sleek remote. A discreet USB bridge enables smartphone or voice operation. Simple to install, pairs perfectly with Gliderpole brackets and finials.

Smart design. Truly Plug & Play.

Pictured: ø38mm (1½") ePole • Discus • Antique Brass - Satin

FICPOLE

PLUG & PLAY MOTORS


Engineered for ease, the system uses a quiet and powerful motor. The battery motor offers a simple, cable-free install, while the mains option requires a high-level wall socket.



CONTROLLED YOUR WAY

The system can be controlled via hand-held remote control, Smart device App or voice control.

Pairing and app connection is intuitive and straightforward.

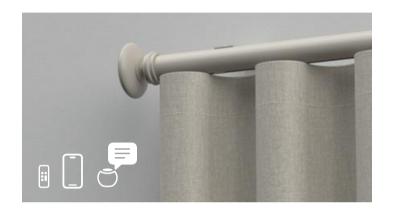



EASIER INSTALLATION

The ePole utilises the brackets from the proven Gliderpole collection and incorporates the clever T-bar guide, which perfectly indexes the tapped hole and grub screw.



Gliders and Rollers are available in either Gypsum or Anthracite colours.

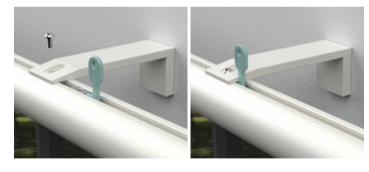

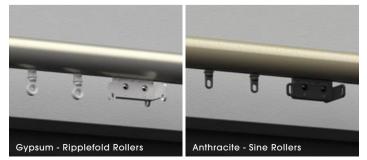

DISCREET DESIGN

The 38mm ($1^{1}/_{2}$ ") pole is paired with an embedded cartridge and a polymer motor adaptor, allowing single or twin drives to sit discreetly behind the curtain.



BRACKET SUITE

The ePole is compatible with the entire Gliderpole bracket suite, offering wall and ceiling fix, double brackets for layered shading and adjustable brackets for tricky installs.



BENT OR CURVED TO SHAPE

ePole has been developed to fit any window shape. Precision bending and adjustable brackets ensure a perfect fit.



MODERN HEADINGS

Modern sinuous heading styles can be created, utilising either hook and tape or snap-tape components.



FINISHES

A full range of colours and finishes are available with a choice of coat options throughout.

COAT OPTIONS






Pictured: ø38mm (1½″) ∱|ePole • Flush End Cap • Dove - Mat


METALLICS

High metallic fleck coatings. Available in Satin and Gloss sheen levels.

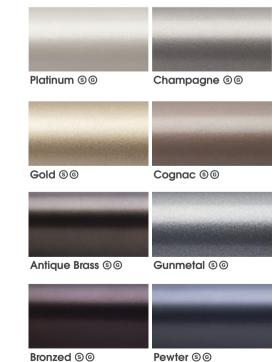

ANODICS

A flat metal colour group, with an anodised style surface texture.

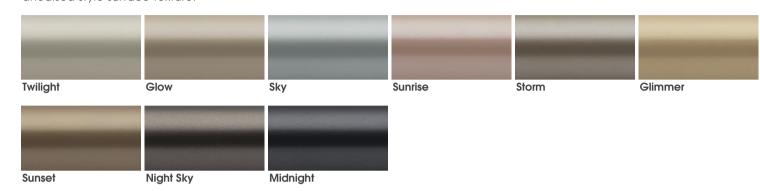

SHADES

A superb selection of opaque colours, all available in a choice of Matte, Satin or Gloss finish.



FINIALS



Flush End Cap Supplied as standard

Round ø38mm (1½") Inclusive Length 3mm (1/8")



Flush Stud

Round ø38mm (1½") Inclusive Length 18mm (11/16")



Round ø38mm (1½") Inclusive Length 18mm (11/16")



Disc

Round ø38mm ($1\frac{1}{2}$ ") Inclusive Length 12mm ($\frac{1}{2}$ ")



Squat Disc Round ø38mm (1½") Inclusive Length 32mm (1¼")



Faceted Disc

Round ø38mm ($1\frac{1}{2}$ ") Inclusive Length 37mm ($1\frac{1}{2}$ ")



Round ø38mm (1½") Inclusive Length 42mm (15%") Round ø38mm (1½") Inclusive Length 66mm (25%")



Clean & Understated

This design group is a thoughtfully scaled edit of the leading Gliderpole designs.

All finials are characterised by lightness, poise and simple lines.

Pictured:

ø38mm (1½") 🗲 ePole • Flush Stud • Sunset

FINIALS Glamorous & Flamboyant Classical design cues have been re-interpreted to suit modern style sensitivity. Pictured: ø38mm (1½") 🗲 ePole • Jewel • Raven - Satin



ø38mm (1½") Inclusive Length 2mm (1/6")



ø38mm (1½") Inclusive Length 2mm (1/6")



Orbit

ø38mm (1½") Inclusive Length 40mm (15%")



Discus ø38mm (1½") Inclusive Length 44mm (1¾")



Jewel

ø38mm (1½") Inclusive Length 42mm (15%")




Flute

ø38mm (1½") Inclusive Length 69mm (211/16")



Squat Globe **ø**38mm (1½") Inclusive Length 63mm (2½")



ø38mm (1½") Inclusive Length 92mm (35%")



Globe



Ribbed Globe

ø38mm (1½") Inclusive Length 92mm (35%")



ø38mm (1½") Inclusive Length 85mm (3%")



Templar ø38mm (1½") Inclusive Length 92mm (35%")



Crystal Templar*

ø38mm (1½") Inclusive Length 92mm (35%")

^{*} Crystal Finials should not be positioned in direct sunlight

BRACKET OPTIONS

SINGLE For straightforward applications.

Projection from wall to pole centre Side Fixing plate size Diameter Round ø38mm ($1\frac{1}{2}$ ") 60mm ($2\frac{3}{8}$ ") • 100mm (4")

Mid Fixing plate size

w32mm (1¼") x н70mm (2¾") w32mm (1¼") x н38mm (1½")

Projection from wall to pole centre Round ø38mm (1½") 100mm (4") • 140mm (5½")

Side Fixing plate size

Mid Fixing plate size

w47mm (11/8") x н76mm (3") w47mm (11/8") x н36mm (11/16")

Heavy Duty

Diameter

Drop from ceiling to top of pole Round ø38mm (1½") 3mm (%")

Fixing plate size

w40mm (1%6") x **L**59mm

RECESS Designed for rebates.

Recess With hook stop

Round ø38mm (1½") 14mm (%6")

Depth off wall

w50mm (2") x H41mm (1%")

Fixing plate size

ADJUSTABLE Designed to give flexibility during installation.

Projection from wall to pole centre Side Fixing plate size

Mid Fixing plate size

Round ø38mm ($1\frac{1}{2}$ ") Min.80mm ($3\frac{1}{6}$ ") Max.130mm ($5\frac{1}{6}$ ") w47mm ($1\frac{1}{6}$ ") x H76mm (3") w47mm ($1\frac{1}{6}$ ") x H36mm ($1\frac{1}{6}$ ")

DOUBLE Designed for layered shading.

Projection from wall to pole centre Side Fixing plate size

Mid Fixing plate size

CUSTOM BRACKETS Specialist designs can be produced for awkward or unusual installations. §

Custom Projection

Specify the exact

projection needed.



Custom Fixing Plate



Helps negotiate cornice

& similar architectural

features.



Specify exact drop required from ceiling.



The solution for tight and awkward locations.

number of the control of the control

Relevant where space is

restricted or weight is a

concern.

SYSTEMS

Double ePole systems may be specified with a motor to front and rear. It is also possible to specify a motor to the main curtain and a manual 38mm (1½") pole to the rear.



MOTOR

Key features

Maximum length: 6 Metres (19ft)⊕ Suitable for Bay Windows:

✓ Suitable for Curved Windows: Header types: Standard, Sine and Ripplefold® Power Options: Battery & Mains powered Touch and go operation: ✓ Obstacle Detection: ✓ Manual operation during power failure: 🗸



AM50 Motor



Plug & Play: Requires no pre-wiring.

Power Type: Battery - Recharable via USB-C Control Type: Remote • App Control



Gypsum Motor Adaptor



Anthracite Motor Adaptor

4 AM50 Motor



Plug & Play: Requires high-level, adjacent power socket.

Power Type: Mains power - 1m (39") cable with regional plug Plug Type: UK • North American Control Type: Remote • App Control Connectivity: Ethernet Port

CONTROL OPTIONS

Remote Controls

Multi-channel hand held remote as standard.



Channels: 6 Frequency: 433MHz Colour Options: White

App & Voice Controls

App control via USB Hub & Tuya integration.



The system may be seamlessly controlled through the Tuya app for effortless convenience.

Tuya integration also allows linking voice control systems for ultimate freedom.





GLIDING OPTIONS

Glider

For standard headings.

Colour Options: Gypsum • Anthracite

Drop(13/16")

For standard headings.

Drop (13/16")

Colour Options: Gypsum • Anthracite



Colour Options: Gypsum • Anthracite

Colour Options: Gypsum • Anthracite Colour Options: Gypsum • Anthracite

(9) Glider/Roller drop from bottom of profile to bottom of eyelet • Ripplefold drop from bottom of profile to centre of eyelet

POLES

Poles are cut, bent and curved to suit individual requirements. When calculating the length of your pole, remember to allow tolerance beyond the width of the frame for the curtains to stack back to the edge of the window.

Poles exceeding the maximum length will be cut into equal parts unless otherwise specified. A pole joiner will be supplied.



Size	Maximum distance between brackets	Maximum length in one piece	Standard Bend radius
ø38mm (1½")	1000mm (39")	4000mm (157″)⊖	R 400mm (16")

⊕ Supplied in sections - Section lengths over 3.0m (118") will incur a handling charge For full technical information, sizes and weights please download the specification guide - www.bradleycollection.com/downloads/



Innovative and cutting edge, Drive 2 redefines electrically operated curtain poles. An evolution of previous designs, it combines a full round profile with clean, modern lines and tailored solutions for every shaped window - all powered by the world's leading motor brands.

Powered Precision. Redefined Design

Pictured: \emptyset 38mm ($1^1/2^n$) * Drive Pole • Powered by Lutron • Planar Drive Rings • Antique Brass - Satin

→ DRIVE(2)

LEADING MOTOR OPTIONS

Drive can be paired with motors from the world's leading brands, offering solutions from discreet battery operation to fully integrated home automation.








PRECISE JOINING

A smart jointing system ensures perfect alignment between pole sections.

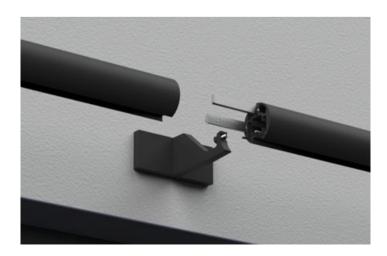

MOTOR ADAPTOR

For optimal curtain appearance, motors may be positioned either in-line (for standard pleated headings) or at 90 degrees to the pole (for wave-shaped or Ripplefold headings).



BENT TO SHAPE

Drive profile can be accurately bent and curved to shape, with optional adjustable brackets, delivering installation flexibility.



METALCOAT DETAILING

Gliders are offered in Gypsum & Anthracite as standard, with coated metal options available for an exact colour match. A low-friction coating supports improved roller design, offering quieter running.




FLUSH CEILING

The rear-fixed bracket is engineered to achieve true flush ceiling installation.



RINGS

For a decorative finish, rings are available, moved by the master carrier. Sinuous heading style with rings also offered. Bracket architecture ensures the front face of the pole remains clear of visible parts, completing the look.

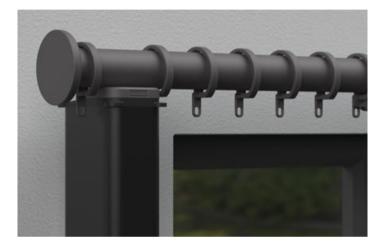

MODERN HEADINGS

Modern sinuous heading styles can be created, using both hook and tape or snap tape components.



FINISHES

This stunning palette of colours and finishes is available on all Drive poles and components, with a choice of coat options throughout.

SHADES


A superb selection of opaque colours, all available in a choice of Matte, Satin or Gloss finish.





ORGANICS

A textured finish, inspired by nature.



METALLICS

High metallic fleck coatings. Available in Satin and Gloss sheen levels.



ANODICS

A flat metal colour group, with an anodised style.







CERAMICS

CERAKOTE

Finished with ceramic Cerakote for industry leading protection and a flawless finish that endures daily life.



CHROMATICS

Brushed and etched aluminium, elevated an architectural edge.

Sealed in a clear ceramic coating for durability.









Pictured: ø38mm (1½") ∱Drive Pole • Powered by Somfy • Seamless • Metalcoat Rollers • Charcoal - Satin

FINIALS

The integrated ends embody seamless design. Supplied as standard, Seamless end caps create clean, minimalism, while geometric finials offer understated decorative accents.





Tulip **ø**38mm (1½") Inclusive Length 43mm (111/16")



Orbic Grand

ø38mm (1½") Inclusive Length 15mm (%6")

ø38mm (1½") Inclusive Length 23mm (1/8")



Drum

ø38mm (1½") Inclusive Length 23mm (1/8")

ø38mm (1½") Inclusive Length 29mm (1½")



ø38mm (1½") **Inclusive Length** 33mm (15/6")



ø38mm (1½") Inclusive Length 65mm (2%6")

Please note that if this option is selected finials cannot be added at a later date.
For full technical information, sizes and weights please download the specification guide - www.bradleycollection.com/downloads/

BRACKET OPTIONS

SINGLE For straightforward applications.

Diameter ø38mm (1½")

Projection from wall to pole centre 100mm (4")

Fixing plate size

w38mm (1½") х н89mm (3½")

Diameter ø38mm (1½") 100mm (4")

Projection from wall to pole centre

Fixing plate size

w89mm (3½") х н38mm (1½")

Flush Ceiling

Diameter ø38mm (1½") Drop from ceiling to top of pole

Fixing plate size

w70mm (23/4") x H30mm (13/6")

Ceiling For systems with Rings



Diameter ø38mm (1½") Drop from ceiling to top of pole

Fixing plate size 7mm (1/4")

w70mm (2³/₄") x **H**30mm (1³/₁₆")

RECESS Designed for rebates.

Recess With hook stop

Diameter ø38mm (1½") Depth off wall

1mm (1/16")

10mm (%")

Fixing plate size ø48mm (11/16")

ADJUSTABLE Designed to give flexibility during installation.



Diameter ø38mm (1½") Projection from wall to pole centre Min.90mm (3%6") Max.110mm (45/16") Fixing plate size

w46mm (1¹³/₁₆") x **H**89mm (3½")



Diameter ø38mm (1½") Projection from wall to pole centre Min.90mm (3\%") Max.110mm (4\%") Fixing plate size

w89mm (3½") х н38mm (1½")

DOUBLE Designed for layered shading.



Diameter Fø38mm (1½") Bø38mm (1½")

Optional Drive + Glide/Float System Fø38mm (1½") Bø30mm (1¾6") Fø38mm (1½") Bø38mm (1½")

Projection from wall to pole centre F200mm (8") B100mm (4")

F160mm (65/16") B 60mm (23/8") F160mm (65%6") B 60mm (23%") Fixing plate size

w57mm (21/4") x H114mm (41/2")

w57mm (21/4") x H114mm (41/2") w57mm (21/4") x H114mm (41/2")



Fø38mm (1½") Bø38mm (1½")

Optional Drive + Glide/Float System Fø38mm (1½") Bø30mm (1¾6") Fø38mm (1½") Bø38mm (1½")

F200mm (8") B100mm (4")

Projection from wall to pole centre

F160mm (65/16") B 60mm (23/8") F160mm (65/16") B 60mm (23/8") Fixing plate size

w114mm (4½") x **H**57mm (2¼4")

w114mm (4½") x H57mm (2¼") w114mm (4½") x H57mm (2¼")

Flush Partition



Diameter

Diameter

Fø38mm (1½") Bø38mm (1½")

Drop from ceiling to top of pole 1mm (1/16")

Fixing plate size

w89mm (3½") x н38mm (1½")

Partition For systems with Rings



Diameter

Fø38mm (1½") Bø38mm (1½")

Drop from ceiling to top of pole 7mm (1/4")

Fixing plate size

w89mm (3½") х н38mm (1½")

CUSTOM BRACKETS Designed to suit any window. §

Custom Projection



Specify the exact projection needed.



Custom Fixing Plate

Relevant where space is restricted or weight is a concern.



Helps negotiate cornice & similar architectural features.

Ceiling Brackets



Specify exact drop required from ceiling. **Angled Brackets**



The solution for tight and awkward locations.

GLIDING OPTIONS



For standard headings.

Drop15mm (5%") Colour Options: Gypsum • Anthracite For standard headings.

Drop (5%") Colour Options: Gypsum • Anthracite For standard headings.

Metalcoat Sine Glider®

Drop③: 15mm (5%") Colour Options: System Colours

Sine Glider Sine Roller

For use with wave-style tape.

Drop③: 15mm (5%") Sine Pitch: 80mm (3\%") Colour Options: Gypsum • Anthracite

For use with wave-style tape.

Drop15mm (5%") Sine Pitch: 60mm (2\%") • 80mm (3\%") Colour Options: Gypsum • Anthracite



Drop③: 15mm (5%") Sine Pitch: 60mm (2\%") • 80mm (3\%") Colour Options: System Colour®

For use with wave-style tape.

Drop③: 18mm (11/16") Ripplefold® Fullness: 80% • 100% Colour Options: System Colour®

 Glider/Roller drop from bottom of profile to bottom of eyelet
 Ripplefold drop from bottom of profile to centre of eyelet. Metalcoat Gliders, supplied in satin finish on Matte & Gloss finished systems

RING OPTIONS

Drive rings are engineered with acetal rollers and liners for smooth operation and a consistent upright position. By design, they pass brackets flawlessly.



Sine Ring® For standard headings. For use with wave-style tape. **ø38mm (1**½") Ring drop⊕: 62mm (2½6")

ø38mm (1½") Ring drop(27/16") Sine Pitch: 80mm (3\%")

Metalcoat Ripplefold Roller®

For use with snap tape.

Gypsum Roller & Liner Anthracite Roller & Liner

POLES

Poles are cut, bent and curved to suit individual requirements. When calculating the length of your pole, remember to allow tolerance beyond the width of the frame for the curtains to stack back to the edge of the window.

Poles exceeding the maximum length will be cut into equal parts unless otherwise specified. A pole joiner will be supplied.



Size	Maximum distance between brackets	Maximum length in one piece	Standard Bend radius
ø38mm (1½")	1000mm (39")	4000mm (157″)⊖	R 400mm (16")

Double Drive systems may be specified with a motor to front and rear. It is also possible to specify a motor to the main curtain and a manual pole to the rear. Simply specify either **GLIDE** or **FLOAT** Ø30mm $(1^3/_{16})^n$ or 38mm $(1^1/_2)^n$ for the rear.



SYSTEM OPTIONS

Systems can be specified with your preferred motor and control system. Choose drives from Lutron, Somfy or Silent Gliss



Key features

Power Options: Mains powered Suitable for Bay Windows: 🗸 Touch and go operation: X Manual operation during power failure: \checkmark Noise level at 1000mm (3'): <44dBAControl Options: Lutron® QS Home Wireless Remote & App Control Home automation systems

MOTOR OPTIONS

4 D105



Requires professional installation.

Power Type: Mains power Control Type: Wired or Remote via Radio dongle Colour: White

4 D145



Requires professional installation.

Power Type: Mains power Control Type: Wired or Remote via Radio dongle Colour: White

4 D175



Requires professional installation.

Power Type: Mains power Control Type: Wired or Remote via Radio dongle Colour: White

CONTROL OPTIONS

Remote Controls

Single channel hand held remote control options available.



Protocol: Sivoia QS wireless system Channels: 1 Frequency: 433MHz Colour: White

App Controls **RA2 Select Hub**

Lutron shading systems can be controlled via Lutron App or through smart devices.



Protocol: Sivoia QS wireless system Compatibily: Alexa • Google Home Frequency: 433MHz • 868MHz Colour: Black

Automation systems

The system can also be integrated with all major home control systems.®









Key features

Power Options: Battery & Mains powered Suitable for Bay Windows: ✓ ⊗ Touch and go operation: ✓ Manual operation during power failure: ✓ Noise level at 1000mm (3'): <44dBA Control Options: Wireless & App Control via RTS or Zigbee 3.0 Home automation systems

MOTOR OPTIONS



Requires professional installation.

Power Type: Mains Motor Type: WT • RTS • Zigbee 3.0



Irismo 45 WF

Requires no pre-wiring.

Power Type: Battery Control Type: RTS



♠ Movelite 35

Requires professional installation.

Power Type: Mains Control Type: WT • RTS





Requires no pre-wiring.

Power Type: Battery Control Type: RTS

CONTROL OPTIONS

Remote Controls Situo • Ysia

Single channel & Multi-channel hand held remote control options available



Protocol: RTS Channels:1 • 5 Frequency: 433MHz

Protocol: Zigbee 3.0 Channels: 1 • 5 Frequency: 433MHz Colour Options: White Colour Options: White

App Controls Tahoma

Somfy shading systems can be controlled via Tahoma App or through smart devices.



Protocol: RTS • Zigbee 3.0 Compatibily: Alexa • Google Home Frequency: 433MHz • 868MHz Colour Options: White

Automation systems

The system can also be integrated with all major home control systems.®









f Mains Power | ■ Battery Power | ❷ Movelite35 WF is not suitable for bay bends | ❷ Specialist support & additional components required ▲ Weight restrictions apply to gliding type & application. For full technical information please refer to the specification guide. www.bradleycollection.com/downloads/

SYSTEM OPTIONS

Systems can be specified with your preferred motor and control system. Choose drives from Lutron, Somfy or Silent Gliss





Key features

Power Options: Mains powered - 100-250 AC and/or 24 V DC in one motor $\,$

Suitable for Bay Windows: \checkmark Touch and go operation: \checkmark

Manual operation during power failure: ✓
Noise level at 1000mm (3'): <36dBA

Control Options: Wireless Remote & App Control

Home automation systems via Silent Gliss Smart

MOTOR OPTIONS

4 9060 Motor



Requires professional installation.

Power Type: Mains AC * DC

control Type: Main power and/or Dry Contact

Colour Options: White • Silver • Black

4 9060 Motor with 11939 Radio module



Requires professional installation.

Power Type: Mains AC * DC
Control Type: SG Control N and/or Dry Contact
Colour Options: White • Silver • Black

4 9060 Motor with 11270 Smart module



Requires professional installation.

Power Type: Mains
Control Type: Home Automation via SG Smart
Colour Options: White • Silver • Black

CONTROL OPTIONS

Remote Controls 11931 • 11932

Single channel & Multi-channel hand held remote control options available.



Protocol: SG Control N Channels: 1 • 6 Frequency: 433MHz Colour Options: White • Black

App Control Move 4.0 11900

9060 Motors are controllable via the Silent Gliss Move® app on smart devices.



Protocol: SG Control N
Frequency: 433MHz • 868MHz
Colour Options: Black

Automation systems Silent Gliss Smart

Silent Gliss 9060 motor integrates with major home control systems via SG Smart.®®



Protocol: SG Smart Communication: Two way





Peerless and opulent, this collection truly has no rival.

A rare, luxurious aesthetic and freedom of expression in design are balanced with the final word in functionality and control.

The world's finest.

Pictured: \emptyset 38mm (1 $^1/_2$ ") Coverpole - Lutron • Standard Stud • Matte Brass **Project by:** Gallagher London • London SW7 - UK

≯|ELEVATE

LEADING MOTOR OPTIONS

Elevate may be specified with motors from the world's leading brands, providing solutions from standalone battery-powered units to complete home automation.

\$LUTRON





Elevate can be specified with Crestron on request.



For Double pole systems, a hand drawn rear pole may be specified if preferred.

SCALE

Elevate Coverpoles are available in two diameters, Ø38mm ($1^{1}/_{2}^{"}$) • 50mm (2"). Finial designs are carefully scaled to maintain the system aesthetic.





DETAILING

The secret of any design is in the detail. Nylon end housings are finished in a complementary colour, for a harmonious tonal effect.



ANY LENGTH

Coverpoles can be supplied to any length¹, subject to maximum weight loadings of the selected motorised system.



FUNCTION

A range of bracket options has been designed to ensure simple installation, including flush fit ceiling brackets.



BENT TO SHAPE

A bespoke bay bending service is available on all diameters to allow the perfect shaped pole to fit any bay window.⊗



MODERN HEADINGS

The choice of motor systems means that modern headings can be accommodated, with both Wave® and Ripplefold® styles available.





F|ELEVATE

EDGE

Edge is the epitome of understatement, being sleek, discreet and integrated. Available in both metal and wood coverpole options.



LAYERED SHADING

Double Edge systems are available, allowing layered curtains for privacy and shading control.



DETAILED TO THE EDGE

The unique Edge bracket design gives a structured return to the wall for curtains and incorporates an adjustable return-to-wall hook eye.





OIL RUBBED

Deep and dramatic, Oil Rubbed delivers a rich, dark surface, with subtle undertones evoking craftsmanship.

WAXED

Dark finish with a gentle sheen. Waxed steel combines durability with understated refinement.

The soft lustre adds warmth and sophistication to all schemes.

CARBON

Striking in depth, Carbon steel offers a sleek, near-black finish with a contemporary edge.

Minimalist and architectural, it provides a strong design statement.



POLISHED

Highly reflective. Polished 304 Stainless Steel radiates precision and modern luxury.

This finish accentuates clean lines and creates a luminous statement.

MATTE

Matte 304 Stainless Steel softens reflections for a calm, architectural feel.

Its smooth, muted surface makes it a versatile choice across modern interiors.

BRUSHED

Defined by linear texture. Brushed 304 Stainless Steel offers a satin finish that strikes a balance between elegance and practicality.

A timeless finish.




Brushed 304

AUTHENTIC BRASS

Crafted from real, solid brass - a material long associated with heritage, quality and timeless luxury.

Each finish celebrates the natural beauty of brass, from the luminous glow of polished surfaces to the subtle depth of brushed and aged treatments.

Sealed in a clear ceramic coating for durability.

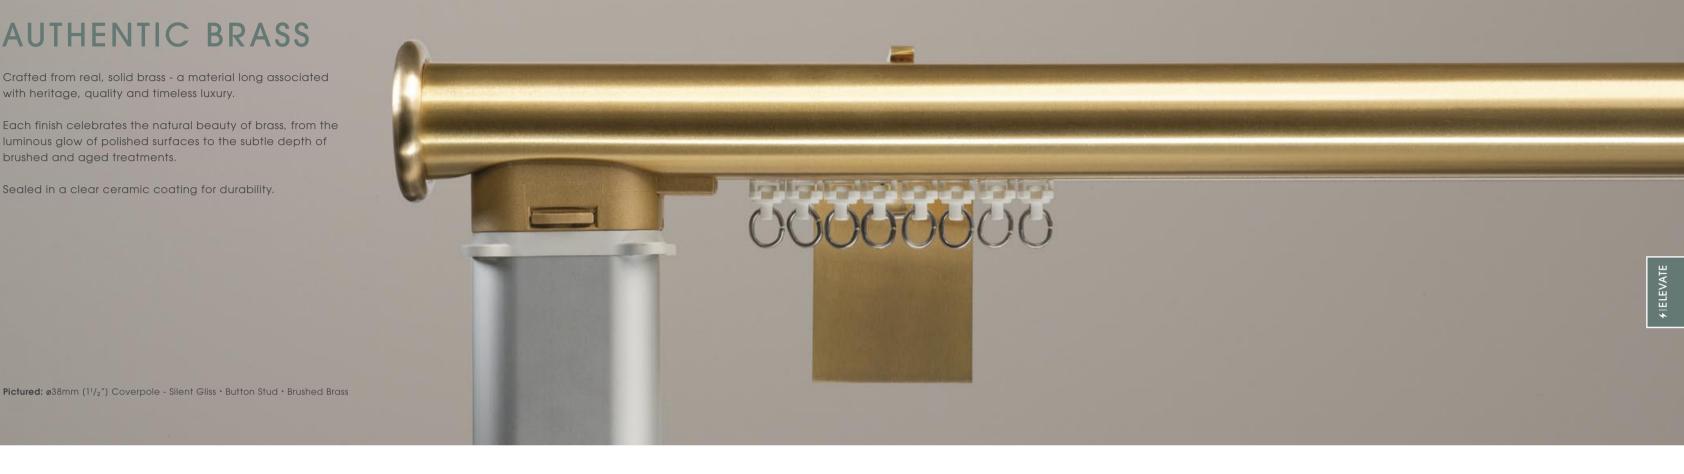

POLISHED BRASS

A timeless, mirror-like finish that radiates luxury. Polished Brass brings a luminous golden tone.

Ideal for interiors that demand refinement and shine.

MATTE BRASS

A contemporary interpretation on brass, with a soft, understated surface that diffuses light beautifully.

Perfect for modern schemes seeking warmth without glare.

BRUSHED BRASS

The subtle texture of Brushed Brass delivers a sophisticated, tactile finish.

Its satin sheen balances elegance with restraint, making it versatile across styles.



Polished Brass ②



Matte Brass 🕘



Brushed Brass (2)

AGED BRASS

Rich, mellowed tones that capture the depth and character of time-worn brass.

Aged Brass offers heritage appeal with a luxurious, lived-in quality.

BRUSHED BRONZE

A darker, brushed brass that exudes strength and warmth.

Brushed Bronze delivers depth and richness, with a soft reflective quality.

MOCHA BRONZE

An indulgent, waxed brass with deep chocolate undertones.

Mocha Bronze offers a refined, modern alternative to traditional dark metals.



Aged Brass ①



Brushed Bronze (2)



Mocha Brass (2)



SOLID WOOD FINISHES

Our solid woods edit celebrates the true character of this organic material.

STAINS

Our curated range of stains enhances the natural beauty of ash, accentuating its grain, while offering distinctive tones from light linen, to the depth of Jet.







Linen ② Stain over ash

Honey @ Stain over ash

Jacobean[®] Stain over ash

Jet@ Stain over ash

NATURALS

When authentic solid wood is required, Naturals celebrates the inherent beauty of Ash, Oak, Cherry & Walnut - each with its own distinctive grain, tone and depth.









Cherry⊕ ②

Walnut⊕ ②



FINIALS

This design edit provides a versatile solution for any project.

Sharp geometric forms give Elevate a modern persona, while softer rounded details offer a more classic sensibility reimagined with a contemporary hand.

Flush End Cap® Supplied as standard

ø38mm (1½") Inclusive Length 6mm (¼")

ø50mm (2") Inclusive Length 6mm (1/4")

Flush Stud For wooden coverpoles only

ø50mm (2") Inclusive Length 8mm (5/16")



ø50mm (2") Inclusive Length 23mm (1/8")

Contrast Stud

ø38mm (1½") **Inclusive Length** 20mm (13/16")

ø50mm (2") Inclusive Length 23mm (1/8")



ø50mm (2") Inclusive Length 59mm (25/16")

Faceted Disc

ø38mm (1½") Inclusive Length 45mm (1¾")

ø50mm (2") Inclusive Length 59mm (25/16")



ø50mm (2") Inclusive Length 106mm (43/6")

ø38mm (1½") Inclusive Length 86mm (3¾")

ø50mm (2") Inclusive Length 106mm (43/16")



ø38mm (1½") Inclusive Length 7mm (¼") **ø**50mm (2") **Inclusive Length** 8mm (5/16")



ø38mm (1½") Inclusive Length 58mm (25/6") ø50mm (2") Inclusive Length 69mm (211/16")



ø50mm (2") Inclusive Length 106mm (4³/₁₆")



ø38mm (1½") Inclusive Length 9mm (3/8") ø50mm (2") Inclusive Length 10mm (3%")



ø50mm (2") **Inclusive Length** 69mm (211/16")



• Please note that if this option is only availble on metal coverpoles. If selected finials cannot be added at a later date.

ø50mm (2") Inclusive Length 106mm (4³/₁₆")

BRACKET OPTIONS

SINGLE	For straightforward app	olications.		
Side		Metal Coverpole Diameter	Projection from wall to track centre	Fixing plate size
		ø38mm (1½″) ø50mm (2″)	100mm (4") 100mm (4")	w52mm (2½°′) x ห104mm (4½ w52mm (2½°′) x ห104mm (4½
		Wood Coverpole Diameter	Projection from wall to track centre	Fixing plate size
		ø50mm (2")	100mm (4")	w52mm (2½6″) х н104mm (4½
Mid	Mid - Joining	Metal Coverpole Diameter	Projection from wall to track centre	Fixing plate size
		ø38mm (1½″) ø50mm (2″)	100mm (4") 100mm (4")	w104mm (4½°) x н 52mm (2½ w104mm (4½°) x н 52mm (2½
		Wood Coverpole Diameter	Projection from wall to track centre	Fixing plate size
		ø50mm (2″)	100mm (4")	w104mm (4%") х н52mm (27
Flush	Flush - Joining	Metal Coverpole Diameter	Drop from ceiling to top of pole	Fixing plate size
*	1	ø38mm (1½") ø50mm (2")	3mm (½″) 3mm (½″)	w70mm (2¾″) x н34mm (1¾ w70mm (2¾″) x н34mm (1¾
de	1	Wood Coverpole Diameter	Projection from wall to track centre	Fixing plate size

DOUBLE Designed for layered shading.

ø50mm (2")

Fø38mm (1½") Bø38mm (1½") Fø38mm (1½") B Uncovered track **гø**50mm (2") **вø**38mm (1½") **гø**50mm (2") **вø**50mm (2") Fø50mm (2") B Uncovered track

Wood Coverpole Diameter

Metal Coverpole Diameter

Fø38mm (1½") Bø38mm (1½")

гø50mm (2") **вø**38mm (1½")

Fø50mm (2") Bø50mm (2")

Fø38mm (1½") B Uncovered track

Fø50mm (2") B Uncovered track

Fø50mm (2") Bø50mm (2") Fø50mm (2") B Uncovered track

Metal Coverpole Diameter Projection from wall to track centre

F160mm (65%) B 60mm (2%) F160mm (65%") B60mm (2%") F160mm (65%") B60mm (23%") F160mm (65%") B60mm (23%")

100mm (4")

F160mm (65%") B 60mm (2%")

F160mm (65%") B60mm (2%") F160mm (65%6") B60mm (2%")

Projection from wall to track centre

Projection from wall to track centre

Projection from wall to track centre

F160mm (65%") B60mm (2%") w104mm (4%") x H52mm (21/6") F160mm (65%°) B60mm (23%°) w104mm (4%") x н52mm (2%6") F160mm (65%") B60mm (2%") w104mm (4%") x н52mm (2%6") F160mm (65%) B 60mm (2%) w104mm (4\%") x H52mm (2\%6") F160mm (65%6") B60mm (2%") w104mm (4\%") x H52mm (2\%")

Wood Coverpole Diameter

Fø50mm (2") Bø50mm (2") F160mm (65/16") B 60mm (23/8") Fø50mm (2") B Uncovered track F160mm (65%°) B60mm (2%°) (41/8") (41/8")

(41/8")

(21/16") (21/16")

(21/16")

15/16") 15/16")

Fixing plate size

Fixing plate size

Fixing plate size

Fixing plate size

w70mm (23/4") x H34mm (15/16")

w52mm (2%6") х н104mm (4%")

w52mm (2\%") x H104mm (4\%")

w52mm (21/16") x н104mm (41/8")

w104mm (4%") x H52mm (21/6")

w104mm (4\%") x H52mm (2\%")

CUSTOM BRACKETS Designed to suit any window. §

EDGE A modern interpretation of French returns.

Single - End⊕

Double - End®

Custom Projection

Custom Fixing Plate



Specify the exact projection needed.

Relevant where space is restricted or weight is a concern.

Metal Coverpole Diameter

Wood Coverpole Diameter

Fø38mm (1½") Bø38mm (1½")

гø50mm (2") **вø**38mm (1½")

гø50mm (2") **вø**50mm (2")

Wood Coverpole Diameter

Fø50mm (2") Bø50mm (2")

ø38mm (1½")

ø50mm (2")

ø50mm (2")

Diameter



Helps negotiate cornice & similar architectural

Projection from wall to track centre

Projection from wall to pole centre

Projection from wall to track centre

F160mm (65%6") B60mm (23%8")

F160mm (65%") B 60mm (23%")

F160mm (65/16") B 60mm (23/8")

F160mm (65%") B 60mm (23%")

100mm (4") 100mm (4")

Projection from wall to track centre

100mm (4")

Fixing plate size

w52mm (21/6") x H104mm (41/8") w52mm (2½6") х н104mm (4½")

Fixing plate size

w52mm (21/16") х н104mm (41/8")

Fixing plate size

w52mm (21/6") х н104mm (41/6") w52mm (21/6") х н104mm (41/6")

w52mm (2%6") x н104mm (4%")

Fixing plate size

w52mm (21/16") x H104mm (41/4")

Angled Brackets



The solution for tight and awkward locations.

features.



Ceiling Brackets



- Handed Item Left and Right version available
- G Custom Brackets shown are for illustration purposes. Brackets are designed on a project basis to specific requirements.























POWERED BY



Key features

Power Options: Mains powered Maximum length: 12 Metres (39ft)⊕ Suitable for Bay Windows: \checkmark

Header types: Standard, S-Fold and Ripplefold® Motor Position: In-line or perpendicular to pole

Manual operation during power failure: 🗸 Noise level at 1000mm (3'): <44dBA

Control Options: Lutron® QS Home Wireless Remote & App Control

Home automation systems

MOTOR OPTIONS

4 D105



Requires professional installation.

Power Type: Mains power

Control Type: Wired or Remote via Radio donale

Maximum length: 9M (29.6ft).

Maximum weight load: 48kg (105lb).

Colour: White

4 D145



Requires professional installation.

Power Type: Mains power

Control Type: Wired or Remote via Radio donale

Maximum length: 9M (29.6ft).

Maximum weight load: 66kg (145lb).

Colour: White

4 D175



Requires professional installation.

Power Type: Mains power

Control Type: Wired or Remote via Radio donale

Maximum length: 12M (39ft).

Maximum weight load: 79kg (175lb) .

Colour: White

CONTROL OPTIONS

Remote Controls

Pico

Single channel hand held remote control options available.

App Controls **RA2 Select Hub**

Lutron shading systems can be controlled via Lutron App or through smart devices.

Automation systems

The system can also be integrated with all major home control systems.®









Protocol: Sivoia QS wireless system Channels: 1

Frequency: 433MHz Colour: White

Protocol: Sivoia QS wireless system Compatibily: Alexa • Google Home Frequency: 433MHz • 868MHz

Colour: Black

4 Mains Power | ② Specialist support & additional components required

▲ Weight restrictions apply to gliding type & application. For full technical information please refer to the specification guide. www.bradleycollection.com/downloads/

GLIDING OPTIONS

Rollers **S-Fold Rollers** Ripplefold® Rollers

For standard headings.

Drop (7/16") Colour: White

For use with wave-style tape,

Drop3:15mm (%16") **S-Fold Pitch**: 60mm (23/8") • 80mm (31/8") Colour: White

For use with Graber or Kirsch snap tape.

Drop3: 16mm (%")

Ripplefold® Fullness: 80% • 100% • 120%

Colour: White

(9) Glider/Roller drop from bottom of profile to bottom of eyelet • Ripplefold drop from bottom of profile to centre of eyelet

COVERPOLE

Poles are cut and bent to suit individual requirements. When calculating the length of your pole, remember to allow tolerance beyond the width of the frame for the curtains to stack back to the edge of the window.

Poles exceeding the maximum length will be cut into equal parts unless otherwise specified. A joining bracket will need to be specified.



Size	Maximum distance between brackets	Maximum length in one piece	Standard Bend radius
ø38mm (1½") Steel • Stainless • Brass	1500mm (60")	2900mm (114″)⊖	R 275mm (10¹¾6″)⊗
ø50mm (2") Steel • Stainless • Brass	1500mm (60")	2900mm (114") ⊙	R 275mm (10¹¾6″)⊗
ø50mm (2") Wood	1500mm (60")	2400mm (94 ½")	R 275mm (10 ¹³ / ₁₆ ")



Key features

Power Options: Battery & Mains powered Maximum length: 12 Metres (39ft)⊖ Suitable for Bay Windows: ✓⊗⊗

Header types: Standard, Ripple and Ripplefold®

Touch and go operation: ✓

Manual operation during power failure: 🗸 Noise level at 1000mm (3'): <44dBA

Control Options: Wireless & App Control via RTS or Zigbee 3.0

Home automation systems

MOTOR OPTIONS



Requires professional installation.

Power Type: Mains

Motor Type: WT • RTS • Zigbee 3.0 Maximum length: 12M (39ff).

Maximum weight load: 60kg (132lb).

Irismo 45 WF



Requires no pre-wiring.

Power Type: Battery Control Type: RTS

Maximum length: 10M (33ft) Maximum weight load: 45kg (99lb).



♠ Movelite 35

Requires professional installation.

Power Type: Mains Control Type: WT • RTS

Maximum weight load: 35kg (77lb).

■ Movelite 35 WF[®]



Requires no pre-wiring.

Maximum weight load: 35kg (77lb).

Power Type: Battery

Maximum length: 10M (33ft).

Control Type: RTS Maximum length: 6M (19ft).

Rollers

GLIDING OPTIONS

For standard headings. **Drop** (13/16")

Colour Options: White • Black

COVERPOLE

A joining bracket will need to be specified.

For use with wave-style tape.

Drop@: 20mm (13/16") Ripple Pitch: 80mm (3\%") Colour Options: White

Ripple Rollers

For use with Graber or Kirsch snap tape.

Drop (11/16")

Ripplefold® Rollers

Ripplefold® Fullness: 80% • 100% • 120%

Colour Options: White

(9) Glider/Roller drop from bottom of profile to bottom of eyelet • Ripplefold drop from bottom of profile to centre of eyelet

beyond the width of the frame for the curtains to stack back to the edge of the window.

Poles exceeding the maximum length will be cut into equal parts unless otherwise specified.

CONTROL OPTIONS

Remote Controls Situo • Ysia

Single channel & Multi-channel hand held remote control options available.



Protocol: RTS Channels: 1 • 5 Frequency: 433MHz Colour Options: White

Protocol: Zigbee 3.0 Channels: 1 • 5 Frequency: 433MHz Colour Options: White

App Controls Tahoma

Somfy shading systems can be controlled via Tahoma App or through smart devices.



Protocol: RTS • Zigbee 3.0 Compatibily: Alexa • Google Home Frequency: 433MHz • 868MHz Colour Options: White

Automation systems

The system can also be integrated with all major home control systems.®











🗲 Mains Power | 📟 Battery Power | 🚳 Movelite 35 WF is not suitable for bay bends | 🕲 Specialist support & additional components required ▲ Weight restrictions apply to gliding type & application. For full technical information please refer to the specification guide. www.bradleycollection.com/downloads/

Maximum distance between brackets Maximum length in one piece Standard Bend radius ø38mm (11/2") Steel • Stainless • Brass 1500mm (60") 2900mm (114")⊕ R275mm (10¹³/16")⊗ ø50mm (2") Steel • Stainless • Brass 1500mm (60") 2900mm (114")⊕ R275mm (10¹³/₁₆")⊗ ø50mm (2") Wood 1500mm (60") 2400mm (94 ½") R275mm (10¹³/₁₆")

Poles are cut and bent to suit individual requirements. When calculating the length of your pole, remember to allow tolerance

POWERED BY



Kev features

Power Options: Mains powered - 100-250 AC and/or 24 V DC in one motor

Maximum length: 25 Metres (82ft)[⊕]

Suitable for Bay Windows: 🗸 🛇

Header types: Standard & Wave®

Motor Position: In-line or perpendicular to pole

Touch and go operation: ✓

Manual operation during power failure: ✓
Noise level at 1000mm (3'): <36dBA

Control Options: Wireless Remote & App Control

Home automation systems via Silent Gliss Smart

MOTOR OPTIONS

4 9060 Motor



Requires professional installation.

Power Type: Mains AC • DC

Control Type: Main power and/or Dry Contact

Maximum length: 25M (82ft).

Maximum weight load: 65kg (143lb).
Colour Options: White • Silver • Black

4 9060 Motor with 11939 Radio module



Requires professional installation.

Power Type: Mains AC • DC

Control Type: SG Control N and/or Dry Contact

Maximum length: 25M (82ft).

Maximum weight load: 65kg (143lb). Colour Options: White • Silver • Black 

Requires professional installation.

Power Type: Mains

Control Type: Home Automation via SG Smart

Maximum length: 25M (82ft).

Maximum weight load: 65kg (143lb).
Colour Options: White • Silver • Black

CONTROL OPTIONS

Remote Controls 11931 • 11932

Single channel & Multi-channel hand held remote control options available.



Protocol: SG Control N Channels: 1 • 6 Frequency: 433MHz Colour Options: White • Black

App Control Move 4.0 11900

9060 Motors are controllable via the Silent Gliss Move® app on smart devices.

Automation systems Silent Gliss Smart

Silent Gliss 9060 motor integrates with major home control systems via SG Smart,®®



Protocol: SG Control N
Frequency: 433MHz • 868MHz
Colour Options: Black



Protocol: SG Smart Communication: Two way

GLIDING OPTIONS

Gliders 2C Rollers® Wave® Gliders Wave® 2C Rollers®

For standard headings.

Drop@: 20mm (13/16")
Colour Options: White

For standard headings.

Drop@: 20mm (13/16")
Colour Options: White • Black

For use with wave-style tape.

Drop@: 20mm (13%")

Wave Pitch: 60mm (23%") • 80mm (3%")

Colour Options: White

For use with wave-style tape.


Drop@: 20mm (13%")
Wave Pitch: 60mm (2%") • 80mm (3%")
Colour Options: White • Black

3 Glider/Roller drop from bottom of profile to bottom of eyelet.

COVERPOLE

Poles are cut and bent to suit individual requirements. When calculating the length of your pole, remember to allow tolerance beyond the width of the frame for the curtains to stack back to the edge of the window.

Poles exceeding the maximum length will be cut into equal parts unless otherwise specified. A joining bracket will need to be specified.

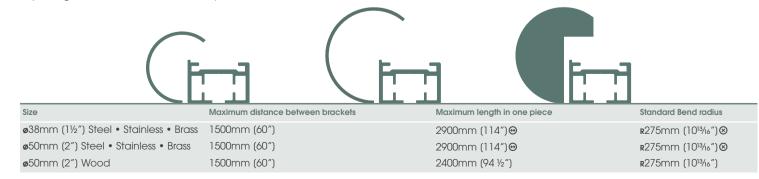

② Supplied in sections - maximum section length UK - 2900mm (114³/16") • Rest of World 2540mm (100") | ③ 304 Stainless Steel finishes not available with bends
 ③ Supplied as standard on systems over maximum shipping lengths above.



LINEAR

Linear 2 transforms an electric track into an architectural feature. The integrated metal cartridge works with engineered motor adaptors, with brackets finished to match for a coordinated finish.

Smart tech meets sharp design.

Pictured: н27mm (11/16") Linear • Powered by Lutron • Raven - Satin

≯|LINEAR(2)

LEADING MOTOR OPTIONS

Linear may be specified with your choice of motors from the leading brands. This provides power and control options ranging from standalone battery powered systems to fully integrated home automation solutions.







FUNCTION

Wall fixed brackets may be specified in a matching track finish, incorporating magnetic cover plates.



METALCOAT DETAILING

The innovative, embedded cartridge is paired with precision engineered metal adaptors finished to match the system. Allowing a single or a twin drive which sit discreetly behind the curtain.



TRUE FLUSH

The direct fix ceiling brackets provide truly flush ceiling mounting.



GLIDING

Gypsum and Anthracite colours offered as standard for gliders. Metalcoat rollers and Metalcoat Ripplefold rollers available for exact colour match. A low-friction channel coating ensures quieter performance.



MODERN HEADINGS

The choice of motor systems means that modern headings can be accommodated, with both Wave® and Ripplefold® styles available.



LAYERED SHADING

Tracks can be supplied to any length Θ , subject to maximum weight loadings of the selected motorised system.



BENT TO SHAPE

A bespoke bay bending and curving service is available on all systems to allow the perfect shaped track to fit any bay window.



All tracks and components may be specified in this stunning palette of colours and finishes, with a choice of coat options throughout.

COAT OPTIONS





High metallic fleck coatings. Available in Satin and Gloss sheen levels.





Platinum ®@ Champagne 99





Gold ®@ Cognac ®®





Antique Brass © ©





Bronzed @ @ Pewter ® ©

SHADES

A superb selection of opaque colours, all available in a choice of Matte, Satin or Gloss finish.



ANODICS

A flat metal colour group, with an anodised style.






CERAMICS

CERAKOTE*

Finished with ceramic Cerakote for industry leading protection and a flawless finish that endures daily life.

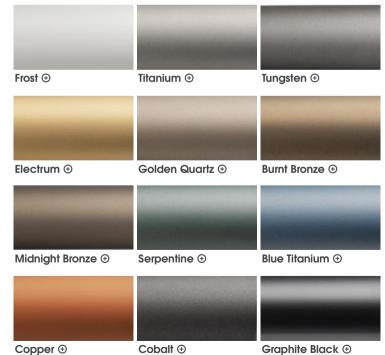

Copper ⊕

BRACKET OPTIONS

SINGLE For straightforward applications.

Projection from wall to track centre 100mm (4")

Side Fixing plate size w40mm (1%6") x H75mm (215/16") Mid Fixing plate size w40mm (1%6") x н36mm (1%6")

Flush Ceiling Kit For direct ceiling fitting.

Drop from ceiling to top of track

0mm (0")

RECESS Designed for rebates.

Recess With hook stop

Depth off wall

14mm (%6")

Fixing plate size

w42mm (111/16") x H27mm (11/16")

ADJUSTABLE Designed to give flexibility during installation.

Projection from wall to track centre Min.80mm (3\%") Max.130mm (5\%")

Side Fixing plate size

w47mm (11/8") x H75mm (215/6")

Mid Fixing plate size

w47mm (1%") x H36mm (1%6")

DOUBLE Designed for layered shading.



Projection from wall to track

F140mm (5½") B40-60mm (1½6-2³/8")

Side Fixing plate size

w47mm (11/8") x H75mm (215/6")

Mid Fixing plate size

w47mm (17/8") x H36mm (17/16")

CUSTOM BRACKETS Designed to suit any window. §





Specify the exact projection needed. **Custom Fixing Plate**



Relevant where space is restricted or weight is a concern.



Helps negotiate cornice & similar architectural features.

Ceilina Brackets



Specify exact drop required from ceiling. **Analed Brackets**



The solution for tight and awkward locations.

GLIDING OPTIONS

Glider

For standard headings.

Drop (13/16") Colour Options: Gypsum • Anthracite



For standard headings.

Drop (13//6") Colour Options: Gypsum • Anthracite



For standard headings.

Drop (13/16") Colour Options: System Colour ®

Metalcoat Sine Roller®

Sine Glider

For use with wave-style tape.

Drop(13/16") Sine Pitch: 80mm (3\%") Colour Options: Gypsum • Anthracite

Sine Roller

For use with wave-style tape.

Drop (13/16") Sine Pitch: 60mm (2\%") • 80mm (3\%") Colour Options: System Colour®



For use with wave-style tape.

Drop (13/6") Sine Pitch: 60mm (23/8") • 80mm (31/8") Colour Options: System Colour®

Metalcoat Ripplefold Roller®



For use with snap tape

Drop(13/16") Ripplefold® Fullness: 80% • 100% Colour Options: System Colour®

(9) Glider/Roller drop from bottom of profile to bottom of eyelet • Ripplefold drop from bottom of profile to centre of eyelet

BESPOKE TRACKS

Tracks are cut, bent and curved to suit individual requirements. When calculating the length of your track, remember to allow tolerance beyond the width of the frame for the curtains to stack back to the edge of the window.

Tracks exceeding the maximum length will be cut into equal parts unless otherwise specified. A track joiner will be supplied.



Maximum distance between brackets Maximum length in one piece Standard Bend radius H27mm (11/16") W32mm (11/4") 1000mm (39") 4000mm (157")⊕ **R**275mm (10 ¹³/₁₆")

Double Linear systems may be specified with a motor to front and rear. It is also possible to specify a motor to the main curtain and a manual track to the rear.

Metalcoat Gliders, supplied in satin finish on Matte & Gloss finished systems For finish colour coordination see the specification guide www.bradleycollection.com/downloads/

SYSTEM OPTIONS

Systems can be specified with your preferred motor and control system. Choose drives from Lutron, Somfy or Silent Gliss



Key features

Power Options: Mains powered
Suitable for Bay Windows: ✓
Touch and go operation: X
Manual operation during power failure: ✓
Noise level at 1000mm (3'): <44dBA
Control Options: Lutron® QS Home Wireless Remote & App Control
Home automation systems

MOTOR OPTIONS

4 D105



Requires professional installation.

Power Type: Mains power Control Type: Wired or Remote via Radio dongle Colour: White 4 D145



Requires professional installation.

Power Type: Mains power
Control Type: Wired or Remote via Radio dongle
Colour: White

4 D175



Requires professional installation.

Power Type: Mains power
Control Type: Wired or Remote via Radio dongle
Colour: White

CONTROL OPTIONS

Remote Controls Pico

Single channel hand held remote control options available.



Protocol: Sivoia QS wireless system Channels: 1 Frequency: 433MHz Colour: White

App Controls RA2 Select Hub

Lutron shading systems can be controlled via Lutron App or through smart devices.



Protocol: Sivoia QS wireless system Compatibity: Alexa • Google Home Frequency: 433MHz • 868MHz Colour: Black

Automation systems

The system can also be integrated with all major home control systems.®









somfy.

Key features

Power Options: Battery & Mains powered
Suitable for Bay Windows: ✓ ☺

Touch and go operation: ✓
Manual operation during power failure: ✓
Noise level at 1000mm (3'): <44dBA

Control Options: Wireless & App Control via RTS or Zigbee 3.0

Home automation systems

MOTOR OPTIONS

∳ Glydea Ultra 60e



Requires professional installation.

Power Type: Mains

Motor Type: WT • RTS • Zigbee 3.0



Requires no pre-wiring.

Power Type: Battery
Control Type: RTS



Requires professional installation.

Power Type: Mains Control Type: WT • RTS





Requires no pre-wiring.

Power Type: Battery
Control Type: RTS

CONTROL OPTIONS

Remote Controls Situo • Ysia

Single channel & Multi-channel hand held remote control options available.



Protocol: RTS
Channels: 1 • 5
Frequency: 433MHz
Colour Options: White

0 0

Protocol: Zigbee 3.0
Channels: 1 • 5
Frequency: 433MHz
Colour Options: White

App Controls Tahoma

Somfy shading systems can be controlled via Tahoma App or through smart devices.



Protocol: RTS • Zigbee 3.0 Compatibily: Alexa • Google Home Frequency: 433MHz • 868MHz Colour Options: White

Automation systems

The system can also be integrated with all major home control systems.®









← Mains Power | ■ Battery Power | ❷ Movelite35 WF is not suitable for bay bends | ② Specialist support & additional components required
 ▲ Weight restrictions apply to gliding type & application. For full technical information please refer to the specification guide. www.bradleycollection.com/downloads/

★ Mains Power | @ Specialist support & additional components required
 ■ Weight restrictions apply to gliding type & application. For full technical information please refer to the specification guide.
 www.bradleycollection.com/downloads/

SYSTEM OPTIONS

Systems can be specified with your preferred motor and control system. Choose drives from Lutron, Somfy or Silent Gliss



Key features

Power Options: Mains powered - 100-250 AC and/or 24 V DC in one motor Suitable for Bay Windows: \checkmark Touch and go operation: \checkmark Manual operation during power failure: \checkmark Noise level at 1000mm (3'): <36dBA

Control Options: Wireless Remote & App Control
Home automation systems via Silent Gliss Smart

MOTOR OPTIONS

4 9060 Motor



Requires professional installation.

Power Type: Mains AC * DC
Control Type: Main power and/or Dry Contact
Colour Options: White * Silver * Black



Requires professional installation.

Power Type: Mains AC * DC

control Type: SG Control N and/or Dry Contact

colour Options: White • Silver • Black

4 9060 Motor with 11270 Smart module



Requires professional installation.

Power Type: Mains
Control Type: Home Automation via SG Smart
Colour Options: White • Silver • Black

CONTROL OPTIONS

Remote Controls 11931 • 11932

Single channel & Multi-channel hand held remote control options available.



Protocol: SG Control N Channels: 1 • 6 Frequency: 433MHz Colour Options: White • Black

App Control Move 4.0 11900

9060 Motors are controllable via the Silent Gliss Move® app on smart devices.



Protocol: SG Control N
Frequency: 433MHz • 868MHz
Colour Options: Black

Automation systems Silent Gliss Smart

Silent Gliss 9060 motor integrates with major home control systems via SG Smart.®®



Protocol: SG Smart Communication: Two way





A modern take of the classic pole and ring, uniting perfect passing functionality with contemporary style.

Rings pass smoothly over discreet brackets and integrated ends create a seamless, refined look


Modern design. Flawless ring movement

Pictured: ø38mm (1½") Pole • Seamless • Charcoal - Satin

FLOAT

FLOATING RING

Coated rings work in tandem with a refined gliding system, producing smooth operation and a consistent, uniform appearance when curtains are drawn.

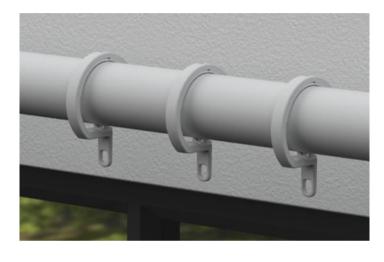


The unique Float ring features a polymer roller, ensuring smooth operation across joins and longer spans.

SMOOTH RUNNING




DISCREET BRACKETS

The bracket architecture keeps the front face of the pole clear of visible parts

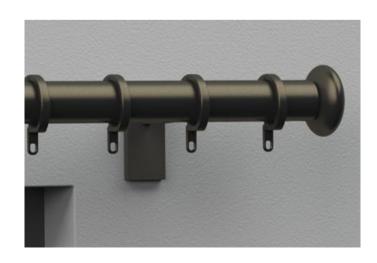


PRECISE JOINING

Innovative jointing ensures seamless, precision alignment between pole sections

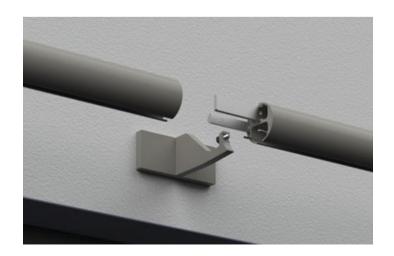

PERFECTED PASSING

Rings secured into the pole profile glide smoothly over brackets, perfect for long spans and the most challenging bays.

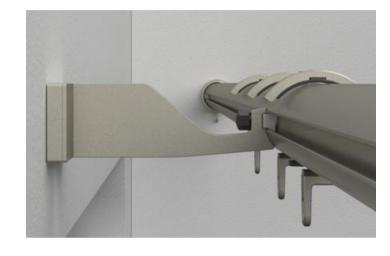

MODERN HEADINGS

Modern sinuous heading styles can be created with rings, using both hook and tape components.



CEILING SKIMMING RINGS

Innovative ceiling brackets allow rings to glide nearly flush and a partition bracket adds versatility for a room divide.



BENT TO SHAPE

Float profile can be accurately bent and curved to shape, with optional adjustable brackets, delivering installation flexibility.




FINISHES

Float presents a striking palette of finishes, complemented by refined coating options to suit any interior scheme

SHADES

A superb selection of opaque colours, all available in a choice of Matte, Satin or Gloss finish.




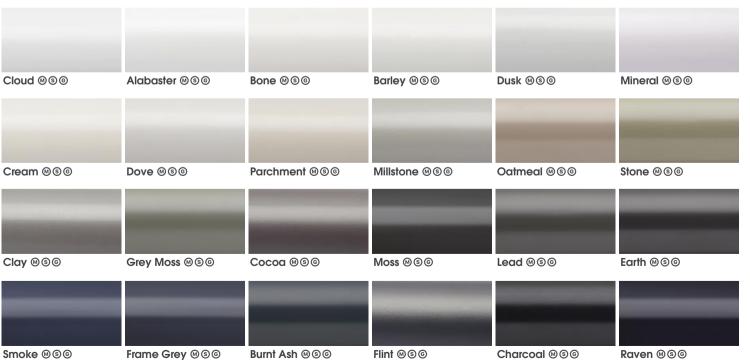

METALLICS

High metallic fleck coatings.

Available in Satin and Gloss sheen levels.

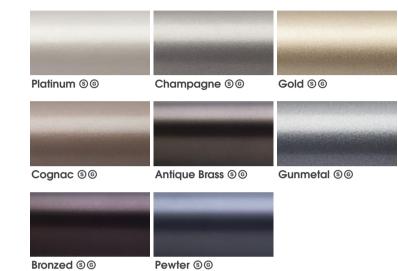

ANODICS

A flat metal colour group, with an anodised style.





Pictured top to bottom: ø30mm (13/16") Pole | Orbic • Bone - Matte | Seamless • Parchment - Matte Oblique · Oatmeal - Matte | Planar · Flint - Matte | Spheric · Raven - Matte

FINIALS

Float's integrated ends embody modern minimalism. Standard seamless end caps deliver a clean finish, with optional geometric finials for added decorative detail.



Seamless® Supplied as standard

ø30mm (1%6") Inclusive Length 5mm (%6") ø38mm (1%2") Inclusive Length 5mm (%6")



Orbic.

ø30mm (13/16") Inclusive Length 13mm (1/2") ø38mm (11/2") Inclusive Length 15mm (9/16")



Orbic Grand

ø30mm (13/16") **Inclusive Length** 13mm (½") **ø**38mm (1½") **Inclusive Length** 15mm (%16")



Drum

ø30mm (1%") Inclusive Length 21mm (1%6") ø38mm (1½") Inclusive Length 23mm (%")



Tulip

ø30mm (13/6") Inclusive Length 35mm (13/8") ø38mm (11/2") Inclusive Length 43mm (11/6")



Oblique

ø30mm (13/16") Inclusive Length 21mm (13/16") **ø**38mm (11/2") Inclusive Length 23mm (7/8")



Planar

ø30mm (13/6") Inclusive Length 25mm (1") ø38mm (1½") Inclusive Length 29mm (1½")



Ellipse

ø30mm (13/6") Inclusive Length 29mm (11/8") **ø**38mm (11/2") Inclusive Length 33mm (15/6")



Spheric

ø30mm (1%6") **Inclusive Length** 53mm (2%6") **ø**38mm (1½") **Inclusive Length** 65mm (2%6")

Please note that if this option is selected finials cannot be added at a later date. | Removable version available on request, Pole is supplied without seamless option or access ports.

 For full technical information, sizes and weights please download the specification guide - www.bradleycollection.com/downloads/

BRACKET OPTIONS

SINGLE For straightforward applications.



Diameter ø30mm (13/6") ø38mm (1½")

Projection from wall to pole centre 60mm (2\%") • 100mm (4") 100mm (4")

Fixing plate size w30mm (13/6") x H70mm (23/4")

Diameter ø30mm (13/16") ø38mm (1½")

Projection from wall to pole centre 60mm (2%") • 100mm (4")

100mm (4")

Fixing plate size

w70mm (23/4") x H30mm (13/6") w89mm (3½") x **H**38mm (1½")

w38mm (1½") х н89mm (3½")



Diameter ø30mm (13/6") ø38mm (1½")

Drop from ceiling to top of pole

7mm (1/4") 7mm (1/4") Fixing plate size

w70mm (23/4") x H30mm (13/6") w70mm (23/4") x H30mm (13/6")

RECESS Designed for rebates.

Recess With hook stop



Diameter ø30mm (13/6") ø38mm (1½")

Depth off wall

10mm (%") 10mm (3/8") Fixing plate size

ø38mm (1½")

ø48mm (11/16")

ADJUSTABLE Designed to give flexibility during installation.



Diameter

ø30mm (13/16") ø38mm (1½")

Projection from wall to pole centre Min.90mm (3\%") Max.110mm (4\%") Min.90mm (3%6") Max.110mm (45/16") Fixing plate size

w38mm (1½") x H70mm (2¾") w46mm (1¹³/₁₆") х н89mm (3½")



Diameter

ø30mm (13/16") ø38mm (1½")

Projection from wall to pole centre

Min.90mm (3%6") Max.110mm (45/16") Min.90mm (3%6") Max.110mm (45/16") Fixing plate size

w70mm (23/4") x H30mm (13/6") w89mm (3½") х н38mm (1½")

DOUBLE Designed for layered shading.



Diameter

Fø30mm (13/6") Bø30mm (13/6") Fø38mm (1½") Bø30mm (1¾6") Fø38mm (1½") Bø38mm (1½")

Projection from wall to pole centre

F160mm (65%") B 60mm (23%") F160mm (65/16") B 60mm (23/8") F160mm (65%") B 60mm (23%") Fixing plate size

Fixing plate size

w57mm (21/4") x H114mm (41/2") w57mm (21/4") x H114mm (41/2") w57mm (21/4") x H114mm (41/2")



Diameter

Fø30mm (13/6") Bø30mm (13/6") Fø38mm (1½") Bø30mm (1¾6") Fø38mm (1½") Bø38mm (1½")

Projection from wall to pole centre

F160mm (65%") B60mm (2%") F160mm (65/16") B 60mm (23/8") F160mm (65%6") B60mm (23%")

w114mm (4½") x **H**57mm (2¼") w114mm (4½") x H57mm (2¼")

w114mm (4½") x **H**57mm (2½")

Partition



Custom Projection

Diameter

Fø30mm (13/6") Bø30mm (13/6") Fø38mm (1½") Bø38mm (1½")

Drop from ceiling to top of pole

7mm (1/4") 7mm (1/4") Fixing plate size

w89mm (3½") х н38mm (1½") w89mm (3½") x н38mm (1½")

CUSTOM BRACKETS Designed to suit any window. §

Custom Fixing Plate



Specify the exact projection needed.

Relevant where space is restricted or weight is a concern.



Helps negotiate cornice & similar architectural features.

Ceiling Brackets



Specify exact drop required from ceiling. **Angled Brackets**




The solution for tight and awkward locations.

RINGS

Float rings are engineered with acetal rollers and liners for smooth operation and a consistent upright position. By design, they pass brackets flawlessly.







For standard headings.



ø30mm (1%") Ring drop@: 49mm (115/16") **ø30mm (1%**") Ring drop@: 49mm (115/16") ø38mm (1½") Ring drop⊕: 62mm (27/16") ø38mm (1½") Ring drop⊕: 62mm (27/16") Sine Pitch: 80mm (31/8")

Gypsum Roller & Liner

3 Ring drop from top of pole to bottom of ringlet For finish colour coordination see the specification guide www.bradleycollection.com/specification-guides/

POLES

Poles are cut, bent and curved to suit individual requirements. When calculating the length of your pole, remember to allow tolerance beyond the width of the frame for the curtains to stack back to the edge of the window.

Poles exceeding the maximum length will be cut into equal parts unless otherwise specified. A pole joiner will be supplied.





Size Maxi	ximum distance between brackets	Maximum length in one piece	Standard Bend radius
ø30mm (1³/16")	00mm (39")	4000mm (157″)⊖	R 250mm (10")
ø38mm (1½")	00mm (39")	4000mm (157″)⊖	r 400mm (16")

ACCESSORIES

Ombres

Small



Internal projection from wall: 150mm (57/8") Fixing plate size: ø19mm (¾")





Internal projection from wall: 150mm (51/8") Fixing plate size: ø25mm (1")



Draw Rod Seamless

Draw rod length: 1000mm (39%")

Custom lengths available to order



<u>O</u>

Mio embodies modern sophistication, where laser-cut precision meets refined design.

Choose the cool, durable elegance of brushed stainless or the subtle warmth of contemporary finishes.

Mio. Sharp form. Pure intent

Pictured: ø25mm (1") French • Flint - Satin

Drapery design: Jim Davis Designs • USA | @ jimdavisdesigns • www.jimdavisdesigns.com **Interior design:** Anna King | @ annakingandco • www.annakingandco.com

STAINLESS

All Mio designs are available in stainless steel. This corrosion resistant material makes the collection ideal for wet rooms and oceanfront properties.



SCALE

With five pole diameters to choose from, Mio provides versatility in scale - from the refined simplicity of café rods to the dramatic presence of bold statement designs.




ANY LENGTH

Poles can be cut to any length. Θ On longer systems, the use of passing brackets & rings will allow uninterrupted travel of the drapes along the full length of the system.



BRACKET SUITE

Bracket options include wall, ceiling and double designs. Each is fitted with a magnetic cover plate to hide fixings, with custom projections and configurations available upon request.

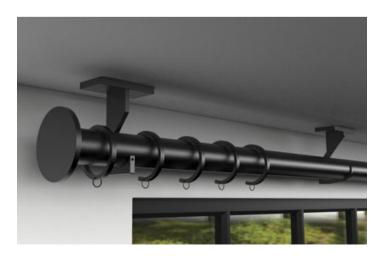

ADJUSTABLE

No more compromises. Our adjustable brackets let you customise the projection, ensuring smooth curtain movement. Strong, stylish and simple to install.



BENT TO SHAPE

A bespoke bay bending and curving® service is available on all diameters, to allow the perfect shaped pole for any window.







MIO

The Mio French pole combines traditional elegance with modern engineering: sharp lines, lined rings for smooth running and cleverly concealed fixings.

SINGLE FRENCH

A simple and elegant treatment, especially suited to taller, narrower windows.



DOUBLE FRENCH

A smart design, improving installation and offering the benefits of the French look with the added privacy of a second layer of drapes.



MIO

CAFÉ RODS

Designed for privacy without sacrificing design, our café rods are ideal for windows that deserve a softer touch. Perfect for kitchens, bathrooms, or street-facing rooms, they support stylish lower-panel curtains that shield your space while keeping it bright and open.



Pictured: ø12.5mm (1/2") Café Rod • Brushed Stainless Steel



d: ø50mm (2") Po may not be accurate, Samples are available on request - www.bradleycollection.com/samples/

STAINLESS FINISHES

The intrinsic corrosion resistance of stainless steel makes it an ideal choice for oceanfront properties and for kitchens, bathrooms and wet rooms.

The iconic Brushed Stainless finish gives an industrial aesthetic, while stainless steel can also be coated on request for a softer look on this durable material.



Brushed Stainless ©

Not available with French poles options

FINISHES


Mio has an unparalleled selection of subtle colour coats, which can be specified in matte, satin or gloss finishes.

For more glamorous projects, metallic coats are featured in both satin and gloss.

SHADES

A superb selection of opaque colours, all available in a choice of Matte, Satin or Gloss finish.



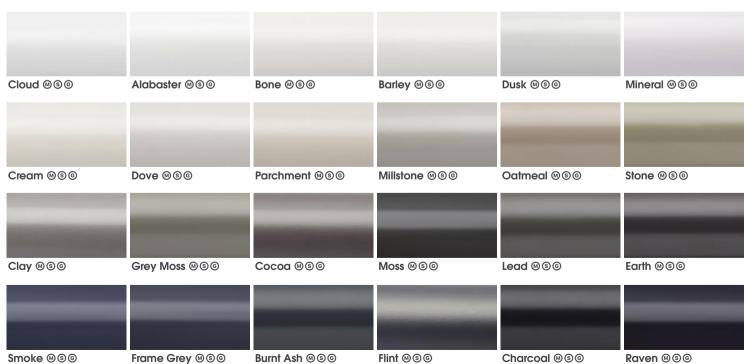

METALLICS

High metallic fleck coatings with most available in Satin and Gloss sheen levels.



ANODICS

A flat metal colour group, with an anodised style.



BRIGHTS

Polished plated finishes provide a traditional sense of luxury.





Polished Nickel ⊕@





Flush Stud

ø 19mm (%4") Inclusive Length 6mm (%4") ø 25mm (1") Inclusive Length 6mm (%6") ø 38mm (%6") Inclusive Length 8mm (%6") ø 50mm (2") Inclusive Length 8mm (%6")



Stud



Disc



Large Disc

ø19mm (¾") Inclusive Length 4mm (¾6") **ø**25mm (1") Inclusive Length 4mm (¾6") **ø**38mm (1½") Inclusive Length 6mm (¼") **ø**50mm (2") Inclusive Length 6mm (¼")



Squat Disc



Faceted Disc

 Ø19mm (¾")
 Inclusive Length 21mm (¹%6")

 Ø25mm (1")
 Inclusive Length 28mm (1½")

 Ø38mm (1½")
 Inclusive Length 41mm (15%")

 Ø50mm (2")
 Inclusive Length 54mm (2½")



Pebble

ø 19mm (34") Inclusive Length 25mm (1") ø 25mm (1") Inclusive Length 34mm (15%") ø 38mm (1½") Inclusive Length 50mm (115%") ø 50mm (2") Inclusive Length 66mm (2%")



Ball

ø19mm (¾") Inclusive Length 50mm (2") **ø**25mm (1") Inclusive Length 63mm (2½") **ø**38mm (1½") Inclusive Length 83mm (3¼") **ø**50mm (2") Inclusive Length 104mm (4½")



Crystal Ball*

ø19mm (¾") Inclusive Length 55mm (3%") **ø**25mm (1") Inclusive Length 66mm (25%") **ø**38mm (1½") Inclusive Length 85mm (3%") **ø**50mm (2") Inclusive Length 108mm (4¼")

BRACKET OPTIONS

SINGLE For straightforward applications.



Diameter

ø12.5mm (½") ø19mm (3/4") ø25mm (1") ø38mm (1½") ø50mm (2")

Projection from wall to pole centre

40mm (1%6") 60mm (23/8") • 100mm (4") 60mm (2%") • 100mm (4") 100mm (4") 100mm (4")

Fixing plate size

w23mm (1/8") x H50mm (2") w34mm (15/6") x H70mm (23/4") **w**34mm (15%") x **H**70mm (23/4") w52mm (21/16") х н104mm (41/8") w52mm (21/16") x H104mm (41/8")





Diameter

ø12.5mm (½") ø19mm (3/4") ø25mm (1") ø38mm (1½")

ø50mm (2")

Projection from wall to pole centre

40mm (1%6") 60mm (23/8") • 100mm (4")

60mm (2¾") • 100mm (4") • 140mm (5½") ⁽³⁾

100mm (4") 100mm (4")

Fixing plate size

w50mm (2") x H23mm (1/8") w70mm (23/4") x H34mm (15/6") w70mm (23/4") x H34mm (15/6") w104mm (4%") x н52mm (2%6") w104mm (4%") x н52mm (2%6")

Ceilina **Passina**



Diameter

ø19mm (3/4") ø25mm (1") ø38mm (1½") ø50mm (2")

Drop from ceiling to pole centre

60mm (23/8") • 100mm (4") 60mm (23/8") • 100mm (4") 100mm (4")

Fixing plate size

w70mm (23/4") x H34mm (15/16") w70mm (23/4") x H34mm (15/16") w104mm (4%") x н52mm (2%6") w104mm (4\%") x H52mm (2\%6")

RECESS Designed for rebates.

Recess With hook stop



Diameter

ø19mm (3/4") ø25mm (1") ø38mm (1½")

ø50mm (2")

Depth off wall

100mm (4")

7mm (1/4") 8mm (5/16") 12mm (½") 15mm (%6")

Fixing plate size

ø26mm (1") ø34mm (15/6")

ø49mm (115/16")

ø64mm (2½")

ADJUSTABLE Designed to give flexibility during installation.



Diameter

ø19mm (3/4") ø25mm (1") ø38mm (1½")

Projection from wall to pole centre

Min.90mm (3%6") Max.110mm (45%6") Min.90mm (3%6") Max.110mm (45/6") Min.100mm (4") Max.120mm ($4\frac{3}{4}$ ")

Projection from wall to pole centre

Fixing plate size

w34mm (15%") x **H**70mm (23/4") w34mm (15/6") x H70mm (23/4") w52mm (21/16") x H104mm (41/8")

Passing



ø19mm (3/4") ø25mm (1")

Diameter

Min.90mm (3%6") Max.110mm (45/16") Min.90mm (3%6") Max.110mm (45/16") ø38mm (1½") Min.100mm (4") Max.120mm ($4^{3}/_{4}$ ")

Fixing plate size

w70mm (23/4") x H34mm (15/16") w70mm (23/4") x H34mm (15/16") w104mm (4\%") x H52mm (2\%")

FRENCH For the classic French look.

Single - End®



ø25mm (1")

Projection from wall to pole centre

100mm (4″), 140mm (5½″) ⁽⁹⁾

Projection from wall to pole centre

Fixing plate size

w26mm (1") x н80mm (3%")

Double - Ender®



Diameter **Fø**25mm (1") Bø19mm (3/4")

F160mm (65/16") **B**60mm (23/8")

Fixing plate size

w74mm (2¹⁵/₁₆") x H113mm (4⁷/₁₆")

CAFÉ Designed for privacy.

Café - End



Diameter ø12.5mm (½")

Depth off wall 6mm (1/4")

Fixing plate size ø42mm (15%")





Diameter

ø12.5mm (½")

Projection from wall to pole centre 25mm (1") • 40mm (1%6")

Fixing plate size

w30mm (13/6") x H80mm (3/6")

DOUBLE Designed for layered shading.

Fø25mm (1") Bø19mm (3/4") Fø38mm (1½") вø25mm (1")

Diameter

F160mm (65/16") **B**60mm (2 3/8")

Projection from wall to pole centre

F160mm (65/16") **B**60mm (2 3/8")

B60mm (2 3/8")

H70mm (23/4") w52mm (21/16") x н104mm (4½")

Fixing plate size

w34mm (15/16") x

Custom Projection

Specify the exact

projection needed.

Passing



вø25mm (1")

Diameter Projection from wall to pole centre F160mm (65/16") Fø25mm (1") вø19mm (¾") **B**60mm (2 3/8") Fø38mm (1½") F160mm (65/16")

Mid fixing plate size w70mm (23/4") x

н34mm (15/6") w104mm (4%") x **н**52mm (21/16")

Passing fixing plate size w72mm (23/16") x н59mm (25/16")

w52mm (21/16") x н104mm (41/8")

CUSTOM BRACKETS

Custom Fixing Plate



Relevant where space is restricted or weight is a concern.

Uplift

Specialist designs can be produced for awkward or unusual installations.



Helps negotiate cornice and similar architectural features.

Angled Brackets



The solution for tight and awkward locations.

140mm (51/2") Mid & Passing brackets only available on French poles | Passing option not available on 12.5mm (1/2")

Handed Item - Left and Right version available | © Not available with brushed finishes

LINED RINGS

Mio rings pair geometric simplicity with a smart nylon liner, ensuring smooth and quiet curtain travel.



Ring @



Ø12.5mm (½") Ring drop@: 39mm (1%6") **Ø19mm (¾") Ring drop** (13/4") **ø25mm (1") Ring drop** (21/16") **ø38mm (1½") Ring drop③:** 66mm (25%") ø50mm (2") Ring drop⊕: 80mm (3\%")

Passing Ring ®



ø12.5mm (½"): n/a **Ø19mm (¾") Ring drop**(): 44mm (1¾") **ø25mm (1") Ring drop (3:** 53mm (21/16") **ø38mm (1½") Ring drop③:** 66mm (25/8") **ø50mm (2″) Ring drop③:** 80mm (3%″)


(½") Ring drop from top of pole to bottom of ringlet | @ Rings are unlined - Passing option not available on 12.5mm (½")

POLES


Poles are cut, bent and curved to suit individual requirements. When calculating the length of your pole, remember to allow tolerance beyond the width of the frame for the curtains to draw back to the edge of the window.


Poles exceeding the recommended maximum distance between brackets, will be cut into equal parts unless otherwise specified.

Pole joiners will be supplied.









le us
')

ACCESSORIES

Ombres

Small



Internal projection from wall: 150mm (57/8") Fixing plate size: ø19mm (3/4")

Large



Internal projection from wall: 150mm (57/8") Fixing plate size: ø25mm (1")

Hold back



Internal measurement: 137mm (53/8") Fixing plate size: ø44mm (13/4")

Tie Back Hook



Projection: 29mm (11/8") **Fixing plate size:** w25mm (1") x H74mm (2¹⁵/16")

Drapery Arm

Drapery arms have been designed to work at dormer windrows, doorways & above beds.



Diameter: ø25mm (1") Fixing plate size: w34mm (15/16") x H156mm (61/8")

Draw Rods®

Standard



Draw rod length: 1000mm (393/8") Custom lengths available to order



ELYSIAN

Uniting pared-down modernist style with a touch of decoration, Elysian is offered in an inspirational range of solid and metallic finishes.

Timeless. Modern. Inspired

Pictured: ø50mm (2") Pole • Templar • Flint - Satin Interior Design: Wynd Design • Wynyard - UK | @ wynddesign

ELYSIAN Pictured left to right ø38mm (1½") Pole • Orbit • Champagne ø30mm (1¾,6") Pole • Aura • Gold - Satin ø50mm (2") Pole • Discus • Antique Brass

SCALE

Available in three pole diameters Ø30mm ($1^3/_{16}$ ") • 38mm ($1^1/_2$ ") • 50mm (2"). Each component is carefully designed and scaled to reflect the design intent.



ANY LENGTH

Elysian can be cut to any length.[⊕] Passing brackets & rings allow curtains to travel the full system length.



BRACKET SUITE

A range of bracket options has been designed to allow easy installation. All wall & ceiling brackets have a magnetic cover plate to hide screw fixings. Brackets can also be supplied to custom projections and designs.



BAYS AND CURVES


Elysian offers a bespoke bay bending and curving service to fit any bay window.



⊕ Supplied in sections - Maximum section per length 4.0m (157") Section lengths over 2.4m (94") will incur a handling charge

ADJUSTABLE

Engineered for easier installation. The design allows for seamless projection adjustment, ensuring professional results.

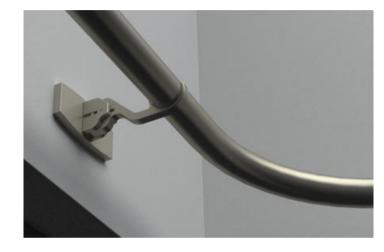


ACCESSORIES

Thoughtfully designed accessories improve functionality of the system without compromising the aesthetic.



SHADES

A superb selection of opaque colours, all available in a choice of Matte, Satin or Gloss finish.

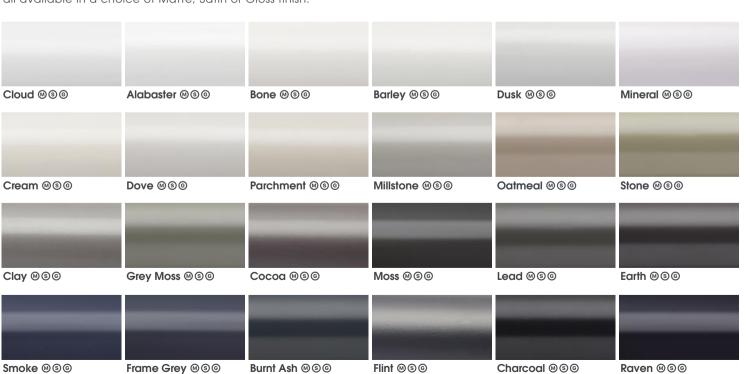

COAT OPTIONS


Satin ®

Gloss ©

Matte ₪

METALLICS

High metallic fleck coatings. Available in Satin and Gloss sheen levels.

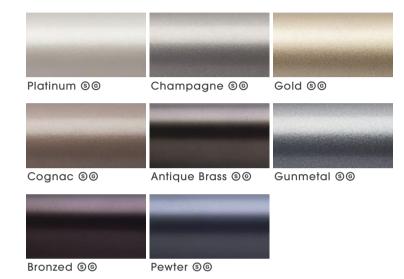


ANODICS

A flat metal colour group, with an anodised style.



BRIGHTS

Polished plated finishes provide a traditional sense of luxury.

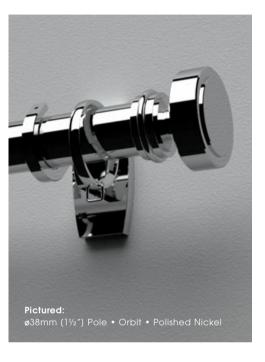



Polished Nickel ⊕@





Halo

ø30mm (1%") Inclusive Length 5mm (%") ø38mm (1½") Inclusive Length 2mm (%") ø50mm (2") Inclusive Length 2mm (%")



Aura

ø30mm (11/6") Inclusive Length 5mm (3/6") ø38mm (11/2") Inclusive Length 2mm (1/6") ø50mm (2") Inclusive Length 2mm (1/6")



Orbit

ø30mm (1¾6") Inclusive Length 36mm (1½6") **ø**38mm (1½") Inclusive Length 40mm (1½") **ø**50mm (2") Inclusive Length 52mm (2¼6")



Squat Globe

ø30mm (1%") Inclusive Length 53mm (2%") **ø**38mm (1½") Inclusive Length 63mm (2½") **ø**50mm (2") Inclusive Length 81mm (3%")



Globe

a30mm (1%") inclusive Length 73mm (2%") **a**38mm (1½") inclusive Length 92mm (35%") **a**50mm (2") inclusive Length 114mm (4½")



Ribbed Globe

ø30mm (1%'6") Inclusive Length 73mm (2½") **ø**38mm (1½") Inclusive Length 92mm (3½") **ø**50mm (2") Inclusive Length 114mm (4½")



Discus

ø30mm (1¾6") Inclusive Length 39mm (1½") **ø**38mm (1½") Inclusive Length 44mm (1¾4") **ø**50mm (2") Inclusive Length 58mm (25%6")



Jewel

ø30mm (1%6") Inclusive Length 37mm (1%6") **ø**38mm (1½") Inclusive Length 42mm (15%") **ø**50mm (2") Inclusive Length 55mm (2%")



Flute

ø30mm (1%6") Inclusive Length 73mm (27%") ø38mm (1½") Inclusive Length 69mm (211/6") ø50mm (2") Inclusive Length 114mm (4½")



Charm

ø30mm (1%6") Inclusive Length 69mm (2%6") ø38mm (1%") Inclusive Length 85mm (3%8") ø50mm (2") Inclusive Length 117mm (4%8")



Templar

a30mm (1%") inclusive Length 79mm (3%") **a**38mm (1½") inclusive Length 92mm (35%") **a**50mm (2") inclusive Length 119mm (41%")



Crystal Templar*

ø38mm (1½") Inclusive Length 92mm (35%") ø50mm (2") Inclusive Length 119mm (41%6")

BRACKET OPTIONS

SINGLE For straightforward applications.



Diameter ø30mm (13/6") ø38mm (1½") ø50mm (2")

Projection from wall to pole centre 100mm (4") 100mm (4") 100mm (4")

Fixing plate size

w40mm (1% ") x н86mm (3% ") **w**50mm (2") x **H**105mm (4%") **w**50mm (2") x **H**105mm (4%")

Passing



ø30mm (13/6") ø38mm (1½") ø50mm (2")

Diameter

Projection from wall to pole centre 100mm (4") 100mm (4") 100mm (4")

Fixing plate size

w86mm (3%") x н40mm (1%6") w105mm (4%") x н50mm (2") w105mm (41/4") x H50mm (2")



Diameter ø30mm (13/6")

ø38mm (1½") ø50mm (2")

Projection from wall to pole centre 100mm (4") 100mm (4")

Fixing plate size

w86mm (3%") x н40mm (1%6") w105mm (41/4") x H50mm (2") w105mm (4½") x н50mm (2")

RECESS Designed for rebates.

Recess With hook stop



Diameter

ø30mm (13/6") ø38mm (1½") ø50mm (2")

Depth off wall 10mm (3/8") 12mm (½")

15mm (%6")

100mm (4")

Fixing plate size

ø40mm (1%6") ø49mm (115/16")

ø64mm (2½")

ADJUSTABLE Designed to give flexibility during installation.



Diameter ø30mm (13/6") ø38mm (1½")

Projection from wall to pole centre Min.90mm (3%6") Max.110mm (45/6") Min.100mm (4") Max.115mm ($4\frac{1}{2}$ ")

Fixing plate size

w40mm (1%6") x H86mm (3%") w50mm (2") x H105mm (4\%")



Diameter

ø38mm (1½")

Min.90mm (3%6") Max.110mm (45%6")

w86mm (3%") x н40mm (1%6") w105mm (4½") x н50mm (2")

DOUBLE BRACKETS

DOUBLE Designed for layered shading.

Passina



Diameter Fø38mm (1½") Fø50mm (2")

Diameter

Fø50mm (2")

F200mm (8") вø30mm (13%6") в60mm (23/8") F200mm (8") вø30mm (13%6") в60mm (23/8")

F200mm (8")

Fø38mm (1½") **F**200mm (8")

вø30mm (1¾6") в60mm (2¾8")

вø30mm (13%6") в60mm (23%")

Projection from wall to pole centre Mid Fixing plate size w105mm (4%") x

Projection from wall to pole centre Fixing plate size

w105mm (4%") x н50mm (2")

w50mm (2") x н105mm (4%")

w50mm (2")x

н50mm (2")

н105mm (4½")

Passing Fixing plate size w105mm (4%") x

w105mm (41/8") x н50mm (2")

н50mm (2")

Custom Projection

CUSTOM BRACKETS Specialist designs can be produced for awkward or unusual installations.

Custom Fixing Plate



Specify the exact projection needed.



Relevant where space is restricted or weight is a concern.



Helps negotiate cornice & similar architectural features.

Custom Ceiling



Specify exact drop required from ceiling. **Angled Brackets**



The solution for tight and awkward locations.

Passing

ø30mm (13/6")

Projection from wall to pole centre

Min.100mm (4") Max.115mm ($4\frac{1}{2}$ ")

Fixing plate size



Ring drop from top of pole to bottom of ringlet

Ring



ø30mm (1%6") Ring drop⊕: 51mm (2") ø50mm (2") Ring drop@: 80mm (3\%")

Passing Ring




ø30mm (1%6") Ring drop®: 51mm (2") **ø38mm** (1½″) Ring drop **③**: 66mm (25/8″) **ø38mm** (1½″) Ring drop **⑤**: 66mm (25/8″) ø50mm (2") Ring drop⊕: 80mm (3\%")


POLES

Poles are cut, bent and curved to suit individual requirements. When calculating the length of your pole, remember to allow tolerance beyond the width of the frame for the curtains to draw back to the edge of the window.

Poles exceeding the recommended maximum distance between brackets, will be cut into equal parts unless otherwise specified.

Pole joiners will be supplied.

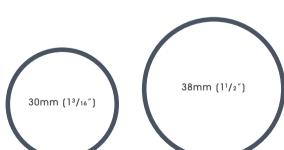



Size	Recommended curtain type for pole diameter	Maximum distance between brackets	Maximum length in one piece	Standard Bend radius
ø30mm (13/16")	Medium weight, lined & interlined curtains	2100mm (83")	4000mm (157")⊕	R 255mm (10")
ø38mm (1½")	Medium to heavy weight, lined & interlined curtains	2200mm (87")	4000mm (157")⊖	R 255mm (10")
ø50mm (2")	Heavy weight interlined curtains	2400mm (96")	4000mm (157″)⊖	r 255mm (10")

ACCESSORIES

Ombres



Internal projection from wall: 150mm (515/16") Fixing plate size: ø68mm (211/16")

Hold back



Internal measurement: 137mm (5%") Fixing plate size: ø44mm (1¾")

Tie Back Hook



Projection: 29mm (11/4")

Fixing plate size: w25mm (1") x H74mm (215%6")

O Not recommended for use with passing rings.

Draw Rods®

Fine	Standard
	8

Draw rod length: 1000mm (39%") Custom lengths available to order



S H H H S

The Steel Collection remains a byword in elegance. Historical design cues, high quality materials and traditional artisan skills are all on display in this timeless classic.

Timeless elegance, forged by Tradition

Pictured: ø25mm (1") Pole • Flared Disc • Brass Toned Interior design: Georgia Victoria • Edinburgh - UK

PURE FORM

Crafted in five pole diameters, the Steel Collection offers scale and proportion to suit every interior - from the delicate café rod to the most dramatic centrepiece.



CRAFTED IN SUFFOLK

A picture of elegance, the Steel Collection blends innovative design with quality craftsmanship.



ON THE FORGE

Authentic, hand-forged Steel - subtle hammer marks preserved, proportions meticulously refined.



ANY LENGTH

Poles can be cut to any length. Θ On longer systems, the use of passing brackets & rings will allow uninterrupted travel of the drapes along the full length of the system.



ADJUSTABLE

Crafted for flexibility, tailored projection when working around window frames, radiators, or unique architectural details. These brackets adapt to your space.



FUNCTION

Brackets are designed for easy installation, with an optional magnetic cover plate. Brackets can be supplied to custom projections and designs.



BENT TO SHAPE

A bespoke bay bending and curving® service is available on all diameters to allow the perfect shaped pole to fit any bay window.





STEEL

FRENCH POLES

The French pole from the Steel Collection is an iconic design favourite. A simple and sophisticated way to adorn windows.





STEEL

CAFÉ RODS


Whether a public space or a kitchen window, our café rods provide the perfect balance of privacy and light.

Designed to support half-length curtains, they offer the coverage you desire - without obstructing natural light or beautiful views.



Pictured: ø12.5mm (1/2") Café Rod • Oil Rubbed



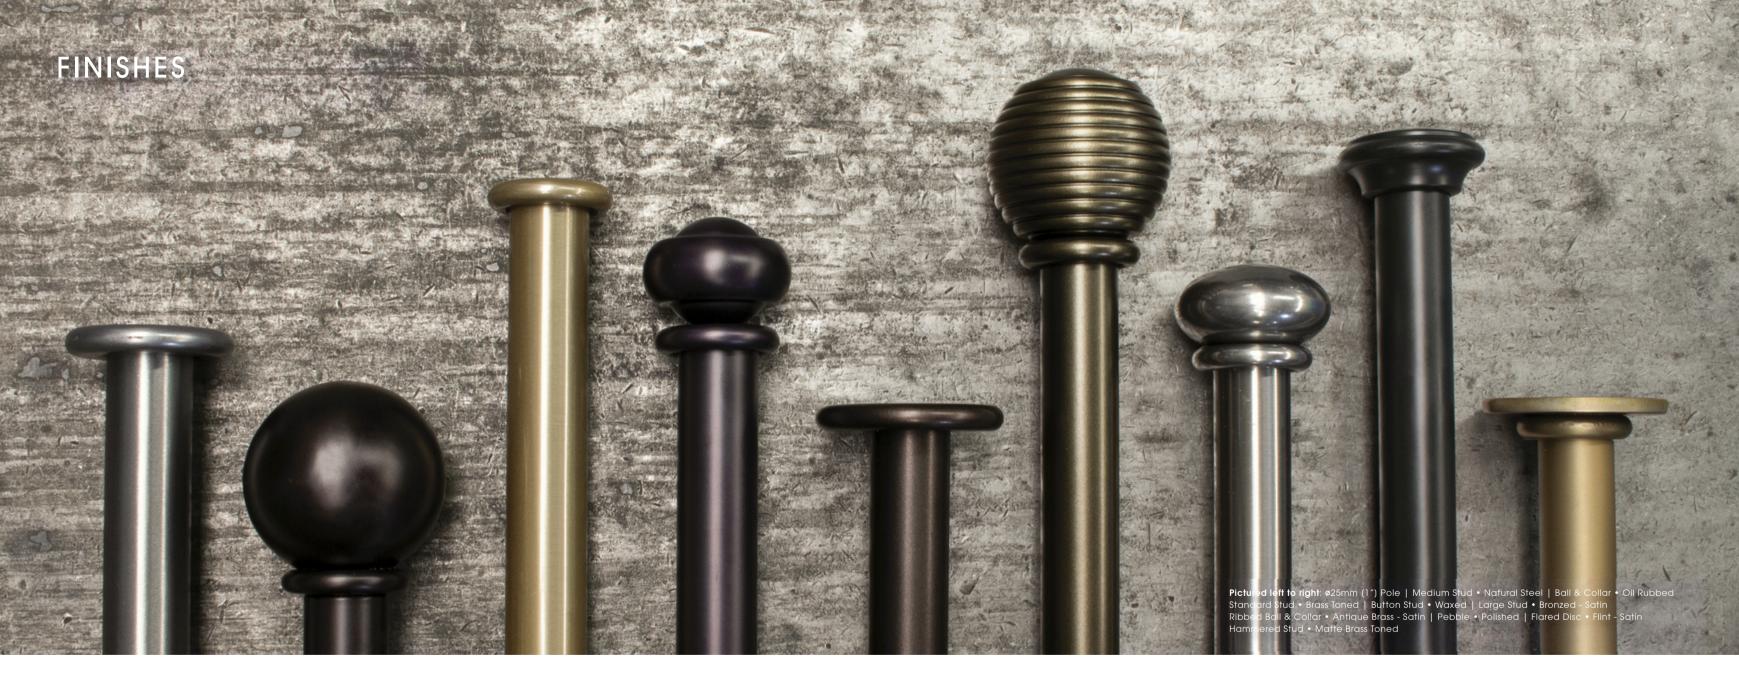

Signature translucent finishes of the Steel Collection allow the beauty of steel to shine through.





FINIALS

Simplicity is the watchword for this grouping of stud, disc and ball designs.



Standard Stud

- \emptyset 12.5mm ($\frac{1}{2}$ ") Inclusive Length 3mm ($\frac{1}{8}$ ")
- **ø**19mm (¾") Inclusive Length 6mm (¼")
- **ø**25mm (1") Inclusive Length 8mm (5/16")
- ø38mm (1½") Inclusive Length 10mm (3%")
- ø50mm (2") Inclusive Length 12mm (½")



Large Stud

- ø19mm (3/4") Inclusive Length 6mm (1/4")
- ø25mm (1") Inclusive Length 8mm (5/16")
- ø38mm (1½") Inclusive Length 10mm (3%")
- ø50mm (2") Inclusive Length 12mm (½")



Button Stud

- ø19mm (3/4") Inclusive Length 26mm (1")
- ø25mm (1") Inclusive Length 40mm (1%6")
- **ø**38mm (1½") Inclusive Length 59mm (25/16")
- **ø**50mm (2") Inclusive Length 69mm (211/16")



Flared Stud

- ø19mm (¾") Inclusive Length 12mm (½")
- **ø**25mm (1") Inclusive Length 14mm (%6")
- ø38mm (1½") Inclusive Length 26mm (1")



Medium Stud

- **ø**19mm (¾4") Inclusive Length 6mm (¼4")
- **ø**25mm (1") Inclusive Length 8mm (5/16")
- **ø**38mm (1½") Inclusive Length 10mm (3/8")
- ø50mm (2") Inclusive Length 12mm (½")



Hammered Stud♥

- ø19mm (¾") Inclusive Length 10mm (¾")
- ø25mm (1") Inclusive Length 12mm (½") ø38mm (1½") Inclusive Length 16mm (5%")
- **ø**50mm (2") Inclusive Length 20mm (13/16")



Pebble

- ø19mm (¾") Inclusive Length 27mm (1¼6")
- ø25mm (1") Inclusive Length 31mm (11/4")
- **ø**38mm (1½") Inclusive Length 48mm (11/8")



Flared Disc

- **ø**19mm (¾") Inclusive Length 17mm (11/16")
- ø25mm (1") Inclusive Length 21mm (1%")
- **ø**38mm (1½") Inclusive Length 34mm (15/16")



Forged Disc♥

- \emptyset 19mm ($\frac{3}{4}$ ") Inclusive Length 2mm ($\frac{1}{16}$ ")
- ø25mm (1") Inclusive Length 3mm (1/8")
- ø38mm (1½") Inclusive Length 3mm (1½")
- ø50mm (2") Inclusive Length 4mm (3/16")



Ball & Collar

- **ø**25mm (1") Inclusive Length 65mm (2%6")
- **ø**38mm (1½") Inclusive Length 75mm (2¹⁵/₁₆") **ø**50mm (2") Inclusive Length 103mm (4½")



Hammered Ball & Collar

ø19mm (¾") Inclusive Length 55mm (2%6") **ø**25mm (1") Inclusive Length 65mm (2%6")



Ribbed Ball & Collar

- \emptyset 19mm (3/4") Inclusive Length60mm (23/8")
- ø25mm (1") Inclusive Length 80mm (23/8")



Hammered Disc♥

- **ø**19mm (¾4") Inclusive Length 2mm (¼6")
- ø25mm (1") Inclusive Length 3mm (1/8")
- ø38mm (1½") Inclusive Length 3mm (%")
- ø50mm (2") Inclusive Length 4mm (3/16")



Crystal Ball & Collar*

- \emptyset 19mm (3/4") Inclusive Length 65mm (29/66")
- ø25mm (1") Inclusive Length 75mm (215/16")
- ø38mm (1½") Inclusive Length 103mm (41/16")



Ball & Claw ♥

- ø19mm (¾″) Inclusive Length 75mm (215/16″)
- ø25mm (1") Inclusive Length 90mm (3%6")
- ø38mm (1½") Inclusive Length 120mm (4¾")



Twisted Knot♥

- \emptyset 19mm (3/4") Inclusive Length 90mm (39/6")
- ø25mm (1") Inclusive Length 95mm (3¾")
- ø38mm (1½") Inclusive Length 150mm (5\%")





Hammered Spear♥

ø19mm (3/4") Inclusive Length 122mm (413/6") ø25mm (1") Inclusive Length 150mm (57/8")



Tusk♥♥

ø19mm (3/4") Inclusive Length 118mm (45/8") ø25mm (1") Inclusive Length 141mm (5/6/6")



Double Ball Basket♥

- **ø**19mm (¾") **Inclusive Length** 142mm (5%6") **ø**25mm (1") **Inclusive Length** 146mm (5¾")
- **ø**38mm (1½") Inclusive Length 205mm (81/6")



Jacob's Horn♥•

ø19mm (3/4") Inclusive Length 105mm (4/8") ø25mm (1") Inclusive Length 130mm (5/8")

Ø25mm (1") Inclusive Length 130mm (5%") **Ø**38mm (1½") Inclusive Length 180mm (7½")



Loop⊎

- ø19mm (3/4") Inclusive Length 115mm (41/2") ø25mm (1") Inclusive Length 135mm (55%")
- ø38mm (1½") Inclusive Length 180mm (71/16")




Curling Leaf ♥•

ø19mm (3/4") Inclusive Length 110mm (45/6") **ø**25mm (1") Inclusive Length 140mm (5/2") **ø**38mm (1/2") Inclusive Length 200mm (8")







BRACKET OPTIONS

SINGLE For straightforward applications.

Side		Diameter ø12.5mm (½") ø19mm (¾") ø25mm (1") ø38mm (1½") ø50mm (2")	Projection from wall to pole centre 40mm (1%") 60mm (2%") • 100mm (4") 60mm (2%") • 100mm (4") 100mm (4") 100mm (4")	` ' '	Covered Fixing plate size n/a w24mm (15%") х н88mm (37%") w29mm (11%") х н106mm (43%") w34mm (15%") х н121mm (43%") w34mm (15%") х н121mm (43%")
Mid	Passing ®	ø25mm (1")	Projection from wall to pole centre 40mm (1%6") 60mm (2%6"), 100mm (4") 60mm (2%6") • 100mm (4") • 140mm (5½") 100mm (4") 100mm (4")	Fixing plate size w50mm (2") x H18mm (11/16") w55mm (23%") x H20mm (13%") w60mm (23%") x H25mm (1") w80mm (3%") x H30mm (13%") w80mm (3%") x H30mm (13%6")	Covered fixing plate size n/a w59mm (25%") x H24mm (15%") w64mm (2½") x H29mm (1½") w84mm (35%") x H34mm (15%") w84mm (35%") x H34mm (15%")
Ceiling	Passing	Diameter ø19mm (%4") ø25mm (1") ø38mm (1½")	Drop from ceiling to pole centre 60mm (2%") • 100mm (4") 60mm (2%") • 100mm (4") 100mm (4")	Fixing plate size w55mm (2%") x H20mm (1%") w60mm (2%") x H25mm (1") w80mm (3%") x H30mm (1%")	

RECESS Designed for rebates.

	00.0 000.		
Recess With hook stop	Diameter	Depth off wall	Fixing plate size
	ø19mm (¾")	4mm (%6")	ø42mm (15%")
()	ø25mm (1")	4mm (¾6")	ø50mm (2")
	ø38mm (1½")	4mm (¾6")	ø72mm (2¹¾٬٬٬)
· ·	ø50mm (2")	4mm (¾6")	ø72mm (2 ¹³ /16")

FRENCH For the classic French look.

French - End	Diameter	Projection from wall to pole centre	Fixing plate size	Covered fixing plate size
-	ø25mm (1 ")	100mm (4″), 140mm (5½″) [⊚]	w30mm (1¾6″) х н80mm (3½″)	w33mm (15%″) x н83mm (3¼″)


Café - End	Diameter	Depth off wall	Fixing plate size	
6	ø12.5mm (½″)	6mm (1/4")	ø25mm (1″)	

	Diameter	Projection from wall to pole centre	Fixing plate size
10	ø12.5mm (½")	25mm (1") • 40mm (1%6")	w30mm (1¾6") х н80mm (3½")

AD ILISTARIF Designed to give flexibility during installation.

Side		Diameter	Projection from wall to pole centre	Fixing plate size	
N		ø19mm (¾") ø25mm (1") ø38mm (1½")	Min.90mm (3%6") Max.110mm (45%6") Min.90mm (3%6") Max.110mm (45%6") Min.100mm (4") Max.120mm (4¾4")	w55mm (2%") х н84mm (35%") w60mm (2%") х н102mm (4") w80mm (3%") х н117mm (4%")	
Mid	Passing	Diameter	Projection from wall to pole centre	Fixing plate size	•••••
Con 1	The same of the sa	ø19mm (¾") ø25mm (1") ø38mm (1½")	Min.65mm (2%6") Max.150mm (5%") Min.75mm (2½%") Max.175mm (6%") Min.95mm (3¾") Max.200mm (7%")	w55mm (2%;") x H20mm (1%;") w60mm (2%;") x H25mm (1") w80mm (3%;") x H30mm (1%;")	

DOUBLE Designed for layered shading.

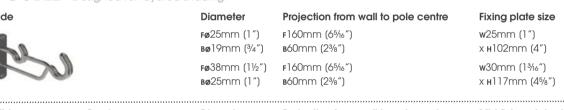

	Passing	Diameter	Projection from wall to pole centre
L 00		ғø25mm (1″) вø19mm (¾″)	F160mm (65% ″) в60mm (23% ″)
	- In far	ғø38mm (1½″) вø25mm (1″)	F160mm (65% ") B60mm (23% ")

Mid fixing plate size	Passing fixing plate size
w60mm (2%°) х н25mm (1°)	w112mm (47/16") х н50mm (2")
w80mm (3½") х н30mm (1¾6")	w122mm (4 ¹³ /ь") х н60mm (2³/ь")

Custom Projection

Specify the exact

projection needed.

CUSTOM BRACKETS Specialist designs can be produced for awkward or unusual installations.

Helps negotiate cornice

and similar architectural

features.



For really tricky installations, arms without backplates can be designed for direct fixing.

Angled Brackets



The solution for tight and awkward locations.

@140mm (5½") Mid & Passing brackets only available on French poles. | @ Passing option not available on 12.5mm (½") For full technical information, sizes and weights please download the specification guide - www.bradleycollection.com/downloads/

Custom Fixing Plate


Relevant where

space is restricted or

weight is a concern.

CLASSIC RINGS

Steel rings are of a classic, unlined nature reflecting the authenticity of the collection.

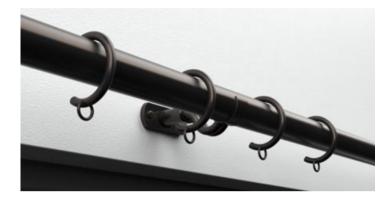

Ring



Ø12.5mm (½") **Ring drop** 38mm (1½") **Ø12.5mm** (½") n/a **Ø19mm** (¾″) Ring drop⊕ 44mm (1¾″) **Ø25mm (1") Ring drop** 49mm (115/16") **ø50mm (2") Ring drop** 82mm (31/4")

Passing Ring @



Ø19mm (¾″) Ring drop 49mm (115/16″) **ø25mm (1″) Ring drop** ⊕ 54mm (2%″) **ø38mm (1½") Ring drop** 63mm (2½") **ø38mm (1½") Ring drop** 71mm (2¹³%6") **ø50mm (2") Ring drop** 89mm (3½")

③ Ring drop from top of pole to bottom of ringlet | ④ Passing option not available on 12.5mm (1/2")

POLES

Poles are cut, bent and curved to suit individual requirements. When calculating the length of your pole, remember to allow tolerance beyond the width of the frame for the curtains to draw back to the edge of the window.

Poles exceeding the recommended maximum distance between brackets, will be cut into equal parts unless otherwise specified.

Pole joiners will be supplied.



25mm (1")





Size	Recommended curtain type for pole diameter	Maximum distance between brackets	Maximum length in one piece	Standard Bend radius	French Pole Bend radius
ø12.5mm (½")	Light weight sheer & voile curtains	1200mm (47")	4000mm (157")⊖	R 75mm (3")	n/a
ø19mm (¾″)	Light to medium weight, lined & non interlined curtains	1800mm (71")	4000mm (157")⊖	R 75mm (3")	n/a
ø25mm (1")	Medium weight, lined & interlined curtains	2000mm (79")	4000mm (157")⊖	R100mm (4")	r 75mm (3")
ø38mm (1½")	Medium to heavy weight, lined & interlined curtains	2200mm (87")	4000mm (157")⊖	R 255mm (10")	n/a
ø50mm (2")	Heavy weight interlined curtains	2400mm (96")	4000mm (157")⊖	R 255mm (10")	n/a

ACCESSORIES

Ombres

Large Stud



Internal projection from wall: 125mm (415/16") Fixing plate size: ø60mm (2%")

Ball & Collar



Internal projection from wall: 125mm (415/16") Fixing plate size: ø60mm (2\%")

Draw Rods® Standard Stud

Ball & Collar

}

Standard Stud

Hold back



Internal measurement: 134mm (51/4") **Fixing plate size: w**20mm (13%6") x **H**56mm (23%6")

Ball & Collar



Tie Back Hook



Internal measurement: 27mm (11/16") **Fixing plate size:** w20mm (13%6") x H78mm (31%6")

Drapery Arm

Drapery arms have been designed to work at dormer windrows, doorways & above beds.



Diameter: ø25mm (1") Fixing plate size: w30mm (13%6") x H185mm (71/4") **Draw rod length:** 1000mm (39%")

Custom lengths available to order