CONTACT

www.bradleycollection.com











USA & CANADA

← +44 (0) 1449 722 724

\$\&\ +1 (310) 815 8255

LONDON SHOWROOM

% +44 (0)207 871 7793







Specialised fixings for mounting brackets will be required in certain situations and are not provided as standard. Steel items are not recommended for damp conditions such as shower rooms. Crystal finials should not be positioned in direct sunlight, and are not suitable for use in conservatories.

The Bradley Collection reserves the right to modify design and materials without prior notice as part of a process of continual product improvement. Due to printing limitations, colours in this brochure may not be accurate.

Products are protected by Design Rights, under provisions of Copyright, Designs & Patents Act 1988. Bradley® and The Bradley Collection® are registered Community trademarks of The Bradley Collection Ltd. in Europe and registered trademarks of the Bradley Collection, Inc. in the USA. Gliderpole is a registered trademark of The Bradley Collection Ltd in the UK.

The Bradley Collection Ltd Lion Barn • Maitland Road • Needham Market • Suffolk • IP6 8NS • UK The Bradley Collection Inc 10866 Washington Blvd #1275 • Culver City • CA 90232 • USA

Printed: 1025 • Copyright © The Bradley Collection Ltd. 2025

ELYSIAN

EDIT10N 25 | 27



ELYSIAN

Uniting pared-down modernist style with a touch of decoration, Elysian is offered in an inspirational range of solid and metallic finishes.

Timeless. Modern. Inspired

Pictured: ø50mm (2") Pole • Templar • Flint - Satin Interior Design: Wynd Design • Wynyard - UK | @ wynddesign

ELYSIAN Pictured left to right ø38mm (1½") Pole • Orbit • Champagne ø30mm (1¾,6") Pole • Aura • Gold - Satin ø50mm (2") Pole • Discus • Antique Brass

SCALE

Available in three pole diameters \emptyset 30mm (1³/16") • 38mm (1¹/2") • 50mm (2"). Each component is carefully designed and scaled to reflect the design intent.



ANY LENGTH

Elysian can be cut to any length. Θ Passing brackets & rings allow curtains to travel the full system length.



BRACKET SUITE

A range of bracket options has been designed to allow easy installation. All wall & ceiling brackets have a magnetic cover plate to hide screw fixings. Brackets can also be supplied to custom projections and designs.



BAYS AND CURVES


Elysian offers a bespoke bay bending and curving service to fit any bay window.



Supplied in sections - Maximum section per length 4.0m (157")
 Section lengths over 2.4m (94") will incur a handling charge

ADJUSTABLE

Engineered for easier installation. The design allows for seamless projection adjustment, ensuring professional results.

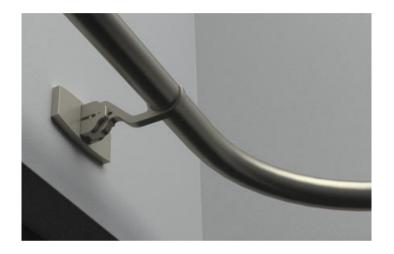


ACCESSORIES

Thoughtfully designed accessories improve functionality of the system without compromising the aesthetic.



SHADES

A superb selection of opaque colours, all available in a choice of Matte, Satin or Gloss finish.

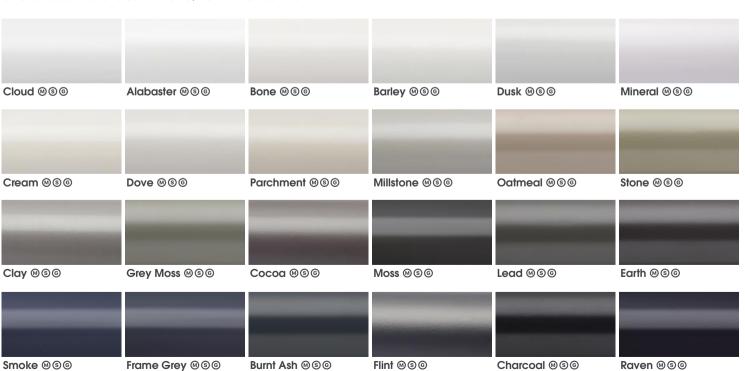

COAT OPTIONS

Satin ®

Gloss ©

Matte ₪

METALLICS

High metallic fleck coatings. Available in Satin and Gloss sheen levels.




ANODICS

A flat metal colour group, with an anodised style.



BRIGHTS

Polished plated finishes provide a traditional sense of luxury.

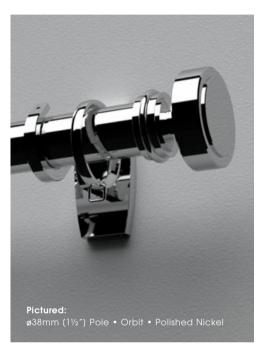







Halo

ø30mm (1%") Inclusive Length 5mm (%") ø38mm (1½") Inclusive Length 2mm (%") ø50mm (2") Inclusive Length 2mm (%")



Aura

ø30mm (1%") Inclusive Length 5mm (%") ø38mm (1½") Inclusive Length 2mm (%") ø50mm (2") Inclusive Length 2mm (%")



Orbit

ø30mm (1¾6") Inclusive Length 36mm (1½6") **ø**38mm (1½") Inclusive Length 40mm (1½") **ø**50mm (2") Inclusive Length 52mm (2¼6")



Squat Globe

ø30mm (1%") Inclusive Length 53mm (2%") **ø**38mm (1½") Inclusive Length 63mm (2½") **ø**50mm (2") Inclusive Length 81mm (3%6")



Globe

a30mm (1%") inclusive Length 73mm (2%") **a**38mm (1½") inclusive Length 92mm (35%") **a**50mm (2") inclusive Length 114mm (4½")



Ribbed Globe

ø30mm (1%'6") Inclusive Length 73mm (2½") **ø**38mm (1½") Inclusive Length 92mm (3½") **ø**50mm (2") Inclusive Length 114mm (4½")



Discus

ø30mm (1¾6") Inclusive Length 39mm (1½") **ø**38mm (1½") Inclusive Length 44mm (1¾4") **ø**50mm (2") Inclusive Length 58mm (25%6")



Jewel

ø30mm (1%") inclusive Length 37mm (1%") **ø**38mm (1½") inclusive Length 42mm (15%") **ø**50mm (2") inclusive Length 55mm (2%")



Flute

ø30mm (1%6") Inclusive Length 73mm (2%") **ø**38mm (1½") Inclusive Length 69mm (2¹¹/₁6") **ø**50mm (2") Inclusive Length 114mm (4½")



Charm

ø30mm (1%6") Inclusive Length 69mm (2%6") ø38mm (1%") Inclusive Length 85mm (3%8") ø50mm (2") Inclusive Length 117mm (4%8")



Templar

a30mm (1%") inclusive Length 79mm (3%") **a**38mm (1½") inclusive Length 92mm (35%") **a**50mm (2") inclusive Length 119mm (41%")



Crystal Templar*

ø38mm (1½") Inclusive Length 92mm (35%") ø50mm (2") Inclusive Length 119mm (411%6")

BRACKET OPTIONS

SINGLE For straightforward applications.



Diameter ø30mm (13/16") ø38mm (1½") ø50mm (2")

Projection from wall to pole centre 100mm (4") 100mm (4") 100mm (4")

Fixing plate size

w40mm (1% ") x н86mm (3% ") **w**50mm (2") x **H**105mm (4%") **w**50mm (2") x **H**105mm (4%")



Diameter ø30mm (13/6") ø38mm (1½") ø50mm (2")

Projection from wall to pole centre 100mm (4") 100mm (4") 100mm (4")

Fixing plate size w86mm (3%") x н40mm (1%6")

w105mm (4%") x н50mm (2") w105mm (41/4") x H50mm (2")



Diameter ø30mm (13/6") **ø**38mm (1½")

ø50mm (2")

Projection from wall to pole centre 100mm (4") 100mm (4")

100mm (4")

Fixing plate size w86mm (3%") x н40mm (1%6")

w105mm (41/4") x H50mm (2") w105mm (4½") x н50mm (2")

RECESS Designed for rebates.

Recess With hook stop



Diameter

ø30mm (13/6") ø38mm (1½") ø50mm (2")

Depth off wall 10mm (3/8") 12mm (½") 15mm (%6")

Fixing plate size

ø40mm (1%6") ø49mm (115/16")

ø64mm (2½")

ADJUSTABLE Designed to give flexibility during installation.



Diameter ø30mm (13/16") ø38mm (1½")

Projection from wall to pole centre Min.90mm (3%6") Max.110mm (45/6") Min.100mm (4") Max.115mm ($4\frac{1}{2}$ ")

Fixing plate size

w40mm (1%6") x H86mm (3%") w50mm (2") x H105mm (4\%")



Passing

Diameter

ø30mm (13/6") ø38mm (1½")

Projection from wall to pole centre Min.90mm (3%6") Max.110mm (45%6") Min.100mm (4") Max.115mm ($4\frac{1}{2}$ ")

Fixing plate size

w86mm (3%") x н40mm (1%6") w105mm (4½") x н50mm (2")

DOUBLE BRACKETS

DOUBLE Designed for layered shading.

Passina



Diameter Fø38mm (1½") Fø50mm (2")

Diameter

F200mm (8") вø30mm (13%в") в60mm (23/в") F200mm (8") вø30mm (13%6") в60mm (23/8")

Projection from wall to pole centre **Fø**38mm (1½") **F**200mm (8")

Projection from wall to pole centre Fixing plate size

вø30mm (1¾6") в60mm (2¾в") Fø50mm (2") **F**200mm (8") вø30mm (1%6") в60mm (2%8") Mid Fixing plate size Passing Fixing plate size

w105mm (4%") x w105mm (4%") x н50mm (2") н50mm (2") w105mm (4%") x

w50mm (2") x н105mm (4%")

w50mm (2")x

н50mm (2")

н105mm (4½")

w105mm (41/8") x н50mm (2")

CUSTOM BRACKETS Specialist designs can be produced for awkward or unusual installations.







Specify the exact projection needed.



Custom Fixing Plate

Relevant where space is restricted or weight is a concern.



Helps negotiate cornice & similar architectural features.

Custom Ceiling



Specify exact drop required from ceiling. **Angled Brackets**



The solution for tight and awkward locations.



Ring drop from top of pole to bottom of ringlet

Ring



ø30mm (1%6") Ring drop 1:51mm (2") ø50mm (2") Ring drop@: 80mm (3\%")

Passing Ring




ø30mm (1%6") Ring drop®: 51mm (2") **ø38mm** (1½″) Ring drop **③**: 66mm (25/8″) **ø38mm** (1½″) Ring drop **⑤**: 66mm (25/8″) ø50mm (2") Ring drop⊕: 80mm (3\%")


POLES

Poles are cut, bent and curved to suit individual requirements. When calculating the length of your pole, remember to allow tolerance beyond the width of the frame for the curtains to draw back to the edge of the window.

Poles exceeding the recommended maximum distance between brackets, will be cut into equal parts unless otherwise specified.

Pole joiners will be supplied.





Size	Recommended curtain type for pole diameter	Maximum distance between brackets	Maximum length in one piece	Standard Bend radius
ø30mm (13/16")	Medium weight, lined & interlined curtains	2100mm (83")	4000mm (157")⊖	R 255mm (10")
ø38mm (1½")	Medium to heavy weight, lined & interlined curtains	2200mm (87")	4000mm (157″)⊖	R 255mm (10")
ø50mm (2")	Heavy weight interlined curtains	2400mm (96")	4000mm (157″)⊖	R 255mm (10")

ACCESSORIES

Ombres



Internal projection from wall: 150mm (515/16") Fixing plate size: ø68mm (211/16")

Hold back



Internal measurement: 137mm (5%") Fixing plate size: ø44mm (1¾")

Tie Back Hook



Projection: 29mm (11/4")

Fixing plate size: w25mm (1") x H74mm (215/16")

Draw Rods®

Fine	Standard		
	8		

Draw rod length: 1000mm (39%") Custom lengths available to order