

CONTACT

www.bradleycollection.com



UK & REST OF THE WORLD

+44 (0)1449 722 724

info@bradleycollection.com

USA & CANADA

+1 (310) 815 8255

info.us@bradleycollection.com

LONDON SHOWROOM

+44 (0)207 871 7793

showroom@studiotwochelsea.com

THE BRADLEY COLLECTION



CEDIA
MEMBER

Specialised fixings for mounting brackets will be required in certain situations and are not provided as standard.
Steel items are not recommended for damp conditions such as shower rooms.
Crystal finials should not be positioned in direct sunlight, and are not suitable for use in conservatories.

The Bradley Collection reserves the right to modify design and materials without prior notice as part of a process of continual product improvement. Due to printing limitations, colours in this brochure may not be accurate.

Products are protected by Design Rights, under provisions of Copyright, Designs & Patents Act 1988.
Bradley® and The Bradley Collection® are registered Community trademarks of The Bradley Collection Ltd. in Europe and registered trademarks of the Bradley Collection, Inc. in the USA.
Gliderpole is a registered trademark of The Bradley Collection Ltd in the UK.

The Bradley Collection Ltd Lion Barn • Maitland Road • Needham Market • Suffolk • IP6 8NS • UK
The Bradley Collection Inc 10866 Washington Blvd #1275 • Culver City • CA 90232 • USA

Printed: 1025 • Copyright © The Bradley Collection Ltd. 2025

MANUAL

EDIT10N

25 | 27



GLIDERPOLE®

This sophisticated collection is the epitome of modern living. The design is sharp, streamlined and purposeful, whilst the choice of colour and finish ensures a truly individual result.


Streamlined, unmistakably individual

Pictured: Round Ø50mm (2") Gliderpole® - Hand Drawn • Flush Stud • Gold - Gloss
Interior design: Jarvis Rayes | @jarvisrayes_interiors | www.jarvisrayes.com
Photography: Jake Fitzjones | @jakefitzjonesphotography

GLIDERPOLE®


EASIER INSTALLATION

Locating grub screws into the top fixing plate is simplified by our precision T-bar guide. Supplied as a complimentary tool with every Gliderpole order, it accurately aligns the tapped hole with the grub screw. An invaluable aid to installation, particularly in situations with limited or obstructed visibility.

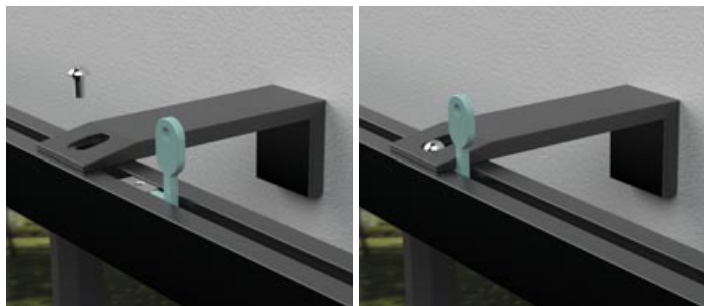

HAND DRAWN

The smooth running hand drawn option is available in five styles. All benefit from considered detailing, including concealed end stops.

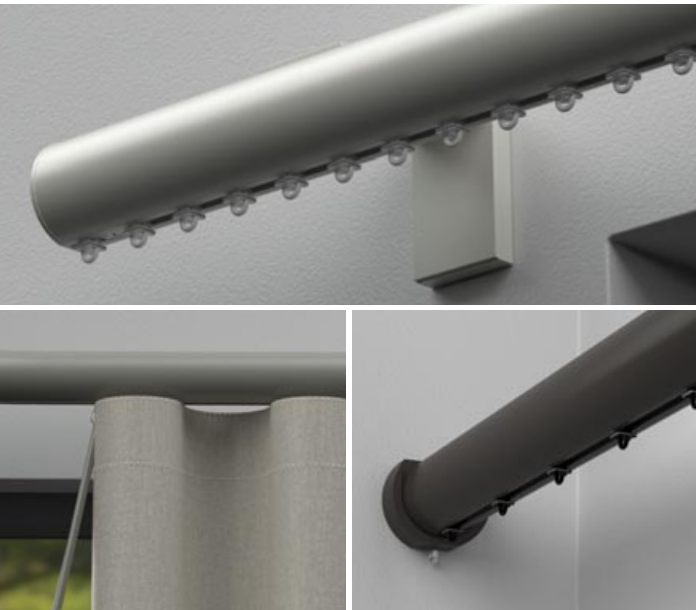

CORDED

The innovative, embedded cording solution is available in three options. All options may be specified with a single or twin cord, positioned discreetly behind the curtain. A colour-matched cord retainer is supplied as standard to ensure child safety compliance.



ANY LENGTH

Gliderpole can be supplied to any length[©] allowing the curtains to travel freely across even the longest systems.



WAVE®

The ubiquitous Wave® heading is accommodated through all Gliderpole options.



BRACKET SUITE

Available in wall, ceiling and double designs for layering. Adjustable brackets support complex bay window installations, while heavy-duty designs are offered to accommodate larger curtain weights. Custom projections and designs can be supplied.



BENT TO SHAPE

Gliderpole is the optimal solution for bends and curves. Precision bending and smooth running gliding systems combine to provide superb functionality.



[©] Supplied in sections - Maximum section per length 4.0m (157") - Section lengths over 3.0m (118") will incur a handling charge



Pictured: Round Ø30mm (1 3/16") Gliderpole® - Hand Drawn • Edge • Raven - Satin

GLIDERPOLE®

EDGE

Gliderpole Edge is a modern, clean cut, return-to-wall concept with a more linear aesthetic.

The unique Edge bracket design gives a structured return to the wall for drapes and incorporates an adjustable return-to-wall hook eye.

Available in Ø30mm (1 3/16") hand drawn.




FINISHES

This stunning palette of colours and finishes is available on all Gliderpoles and components, with a choice of coat options throughout.

SHADES

A superb selection of opaque colours,
all available in a choice of Matte, Satin or Gloss finish.

COAT OPTIONS

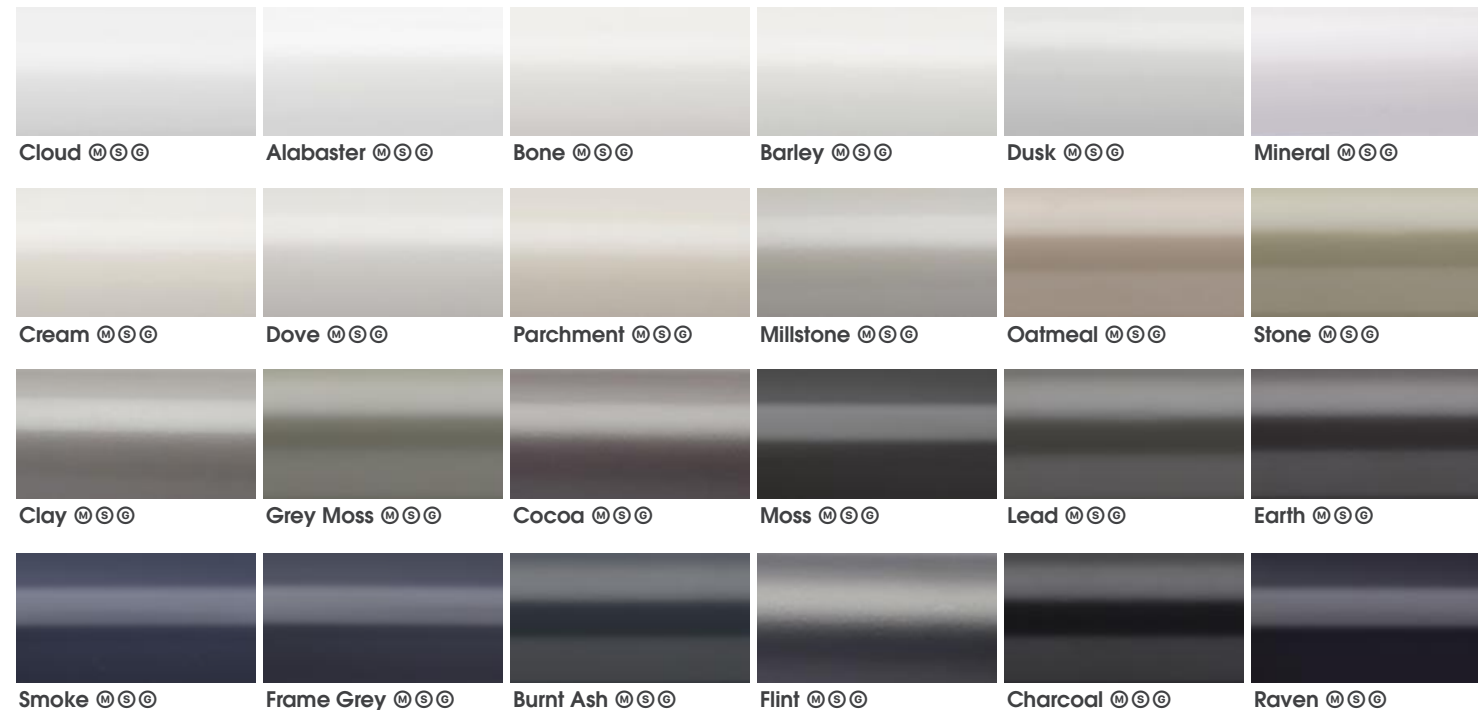

METALLICS

High metallic fleck coatings with most available in Satin and Gloss sheen levels.



ANODICS

A flat metal colour group, with an anodised style.




BRIGHTS

Gliderpole may be specified in bright aluminium finish, complemented by finials, brackets and components in a plated, Polished Nickel Finish.

POLE ONLY
FINISH

COMPONENT
ONLY FINISH



FINIALS

Clean & Understated

All finials are characterised by lightness, poise and simple lines.

Pictured left to right:
Round ø50mm (2") Gliderpole® - Hand Drawn • Flush End Cap • Raven - Matte
Round ø23mm (1⁵/₁₆") Gliderpole® - Hand Drawn • Flush End Cap • Charcoal - Matte
Round ø30mm (1³/₁₆") Gliderpole® - Hand Drawn • Flush End Cap • Flint - Matte
Square H27mm (1¹/₁₆") Gliderpole® - Hand Drawn • Flush End Cap • Lead - Matte
Flat H36mm (1⁷/₁₆") Gliderpole® - Hand Drawn • Flush End Cap • Burnt Ash - Matte



Flush End Cap *Supplied as standard*

Square H27mm (1¹/₁₆") Inclusive Length 3mm (1/₈")
Flat H36mm (1⁷/₁₆") Inclusive Length 3mm (1/₈")
Round ø23mm (1⁵/₁₆") Inclusive Length 3mm (1/₈")
Round ø30mm (1³/₁₆") Inclusive Length 3mm (1/₈")
Round ø50mm (2") Inclusive Length 3mm (1/₈")



Flush Stud

Square H27mm (1¹/₁₆") Inclusive Length 12mm (1/2")
Flat H36mm (1⁷/₁₆") Inclusive Length 12mm (1/2")
Round ø23mm (1⁵/₁₆") Inclusive Length 10mm (3/8")
Round ø30mm (1³/₁₆") Inclusive Length 12mm (1/2")
Round ø50mm (2") Inclusive Length 18mm (1¹/₁₆")



Stud

Round ø23mm (1⁵/₁₆") Inclusive Length 10mm (3/8")
Round ø30mm (1³/₁₆") Inclusive Length 12mm (1/2")
Round ø50mm (2") Inclusive Length 18mm (1¹/₁₆")



Disc

Round ø23mm (1⁵/₁₆") Inclusive Length 10mm (3/8")
Round ø30mm (1³/₁₆") Inclusive Length 12mm (1/2")
Round ø50mm (2") Inclusive Length 18mm (1¹/₁₆")



Squat Disc

Round ø30mm (1³/₁₆") Inclusive Length 32mm (1¹/₄")
Round ø50mm (2") Inclusive Length 58mm (2⁵/₁₆")



Faceted Disc

Round ø30mm (1³/₁₆") Inclusive Length 37mm (1¹/₂")
Round ø50mm (2") Inclusive Length 69mm (2¹¹/₁₆")



Pebble

Round ø30mm (1³/₁₆") Inclusive Length 42mm (1⁵/₈")
Round ø50mm (2") Inclusive Length 68mm (2¹¹/₁₆")



Ball

Round ø30mm (1³/₁₆") Inclusive Length 66mm (2⁵/₈")
Round ø50mm (2") Inclusive Length 112mm (4⁷/₈")

For full technical information, sizes and weights please download the specification guide
www.bradleycollection.com/downloads/

FINIALS

Glamorous & Flamboyant

Classical design cues have been re-interpreted to suit modern style sensitivity.



Pictured left to right:
Round $\varnothing 50\text{mm}$ (2") Gliderpole® - Hand Drawn | Ribbed Globe • Bronze - Satin
Discus • Antique Brass - Satin | Flute • Champagne - Satin | Templar • Platinum - Satin



Halo

$\varnothing 30\text{mm}$ (1 $\frac{3}{16}$ ") Inclusive Length 5mm ($\frac{3}{16}$ ")
 $\varnothing 50\text{mm}$ (2") Inclusive Length 2mm ($\frac{1}{16}$ ")



Aura

$\varnothing 30\text{mm}$ (1 $\frac{3}{16}$ ") Inclusive Length 5mm ($\frac{3}{16}$ ")
 $\varnothing 50\text{mm}$ (2") Inclusive Length 2mm ($\frac{1}{16}$ ")



Orbit

$\varnothing 30\text{mm}$ (1 $\frac{3}{16}$ ") Inclusive Length 36mm (1 $\frac{7}{16}$ ")
 $\varnothing 50\text{mm}$ (2") Inclusive Length 52mm (2 $\frac{1}{16}$ ")



Discus

$\varnothing 30\text{mm}$ (1 $\frac{3}{16}$ ") Inclusive Length 39mm (1 $\frac{1}{2}$ ")
 $\varnothing 50\text{mm}$ (2") Inclusive Length 58mm (2 $\frac{5}{16}$ ")



Jewel

$\varnothing 30\text{mm}$ (1 $\frac{3}{16}$ ") Inclusive Length 37mm (1 $\frac{7}{16}$ ")
 $\varnothing 50\text{mm}$ (2") Inclusive Length 55mm (2 $\frac{1}{16}$ ")



Flute

$\varnothing 30\text{mm}$ (1 $\frac{3}{16}$ ") Inclusive Length 73mm (2 $\frac{7}{8}$ ")
 $\varnothing 50\text{mm}$ (2") Inclusive Length 114mm (4 $\frac{1}{2}$ ")



Squat Globe

$\varnothing 30\text{mm}$ (1 $\frac{3}{16}$ ") Inclusive Length 53mm (2 $\frac{1}{16}$ ")
 $\varnothing 50\text{mm}$ (2") Inclusive Length 81mm (3 $\frac{1}{8}$ ")



Globe

$\varnothing 30\text{mm}$ (1 $\frac{3}{16}$ ") Inclusive Length 73mm (2 $\frac{7}{8}$ ")
 $\varnothing 50\text{mm}$ (2") Inclusive Length 114mm (4 $\frac{1}{2}$ ")



Ribbed Globe

$\varnothing 30\text{mm}$ (1 $\frac{3}{16}$ ") Inclusive Length 73mm (2 $\frac{7}{8}$ ")
 $\varnothing 50\text{mm}$ (2") Inclusive Length 114mm (4 $\frac{1}{2}$ ")



Charm

$\varnothing 30\text{mm}$ (1 $\frac{3}{16}$ ") Inclusive Length 69mm (2 $\frac{11}{16}$ ")
 $\varnothing 50\text{mm}$ (2") Inclusive Length 117mm (4 $\frac{5}{8}$ ")



Templar

$\varnothing 30\text{mm}$ (1 $\frac{3}{16}$ ") Inclusive Length 79mm (3 $\frac{1}{8}$ ")
 $\varnothing 50\text{mm}$ (2") Inclusive Length 119mm (4 $\frac{11}{16}$ ")



Crystal Templar*

$\varnothing 50\text{mm}$ (2") Inclusive Length 119mm (4 $\frac{11}{16}$ ")

*: Crystal Finials should not be positioned in direct sunlight
For full technical information, sizes and weights please download the specification guide - www.bradleycollection.com/downloads/

BRACKET OPTIONS

SINGLE *For straight forward applications.*

Side	Mid	Diameter	Projection from wall to pole centre	Side Fixing plate size	Mid Fixing plate size
		Square H27mm (1½")	60mm (2¾") • 100mm (4")	w32mm (1¼") x h70mm (2¾")	w32mm (1¼") x h38mm (1½")
		Flat H36mm (1⅞")	60mm (2¾") • 100mm (4")	w32mm (1¼") x h70mm (2¾")	w32mm (1¼") x h38mm (1½")
		Round ø23mm (⅞")	60mm (2¾") • 100mm (4")	w32mm (1¼") x h70mm (2¾")	w32mm (1¼") x h38mm (1½")
		Round ø30mm (1⅓")	60mm (2¾") • 100mm (4")	w32mm (1¼") x h70mm (2¾")	w32mm (1¼") x h38mm (1½")
		Round ø50mm (2")	60mm (2¾") • 100mm (4")	w32mm (1¼") x h70mm (2¾")	w32mm (1¼") x h38mm (1½")

Flush Ceiling Light Duty	Diameter	Drop from ceiling to top of pole	Fixing plate size
	Square H27mm (1½")	3mm (⅛")	w20mm (⅞") x L50mm (2")
	Flat H36mm (1⅞")	3mm (⅛")	w20mm (⅞") x L50mm (2")
	Round ø23mm (⅞")	3mm (⅛")	w20mm (⅞") x L50mm (2")
	Round ø30mm (1⅓")	3mm (⅛")	w20mm (⅞") x L50mm (2")

SINGLE - HEAVY DUTY *For heavier fabrics, where additional support is required.*

Side Heavy Duty	Mid Heavy Duty	Diameter	Projection from wall to pole centre	Side Fixing plate size	Mid Fixing plate size
		Square H27mm (1½")	100mm (4") • 140mm (5½")	w47mm (1⅞") x h76mm (3")	w47mm (1⅞") x h36mm (1⅞")
		Flat H36mm (1⅞")	100mm (4") • 140mm (5½")	w47mm (1⅞") x h76mm (3")	w47mm (1⅞") x h36mm (1⅞")
		Round ø23mm (⅞")	100mm (4") • 140mm (5½")	w47mm (1⅞") x h76mm (3")	w47mm (1⅞") x h36mm (1⅞")
		Round ø30mm (1⅓")	100mm (4") • 140mm (5½")	w47mm (1⅞") x h76mm (3")	w47mm (1⅞") x h36mm (1⅞")
		Round ø50mm (2")	100mm (4") • 140mm (5½")	w47mm (1⅞") x h76mm (3")	w47mm (1⅞") x h36mm (1⅞")

Flush Ceiling Heavy Duty	Diameter	Drop from ceiling to top of pole	Fixing plate size
	Square H27mm (1½")	3mm (⅛")	w40mm (1⅞") x L59mm (2⅝")
	Flat H36mm (1⅞")	3mm (⅛")	w40mm (1⅞") x L59mm (2⅝")
	Round ø23mm (⅞")	3mm (⅛")	w40mm (1⅞") x L59mm (2⅝")
	Round ø30mm (1⅓")	3mm (⅛")	w40mm (1⅞") x L59mm (2⅝")
	Round ø50mm (2")	3mm (⅛")	w40mm (1⅞") x L59mm (2⅝")

RECESS *Designed for rebates.*

Recess <i>With hook stop</i>	Diameter	Depth off wall	Fixing plate size
	Square H27mm (1½")	14mm (⅝")	w42mm (1⅞") x H27mm (1⅞")
	Flat H36mm (1⅞")	14mm (⅝")	w31mm (1¼") x H36mm (1⅞")
	Round ø23mm (⅞")	14mm (⅝")	w33mm (1⅝") x H24mm (1⅞")
	Round ø30mm (1⅓")	14mm (⅝")	w40mm (1⅞") x H31mm (1¼")
	Round ø50mm (2")	14mm (⅝")	w64mm (2½") x H51mm (2")

EDGE *A modern interpretation of French returns.*

End	Diameter	Projection from wall to pole centre	Fixing plate size
	Round ø30mm (1⅓")	100mm (4")	w32mm (1¼") x h70mm (2¾")

ADJUSTABLE *Designed to give flexibility during installation.*

Side	Mid	Diameter	Projection from wall to pole centre	Side Fixing plate size	Mid Fixing plate size
		Square H27mm (1½")	Min.80mm (3⅛") Max.130mm (5⅞")	w47mm (1⅞") x h76mm (3")	w47mm (1⅞") x h36mm (1⅞")
		Flat H36mm (1⅞")	Min.80mm (3⅛") Max.130mm (5⅞")	w47mm (1⅞") x h76mm (3")	w47mm (1⅞") x h36mm (1⅞")
		Round ø23mm (⅞")	Min.80mm (3⅛") Max.130mm (5⅞")	w47mm (1⅞") x h76mm (3")	w47mm (1⅞") x h36mm (1⅞")
		Round ø30mm (1⅓")	Min.80mm (3⅛") Max.130mm (5⅞")	w47mm (1⅞") x h76mm (3")	w47mm (1⅞") x h36mm (1⅞")
		Round ø50mm (2")	Min.80mm (3⅛") Max.130mm (5⅞")	w47mm (1⅞") x h76mm (3")	w47mm (1⅞") x h36mm (1⅞")

DOUBLE *Designed for layered shading.*

Side	Mid	Diameter	Projection from wall to pole centre	Side Fixing plate size	Mid Fixing plate size
		Square H27mm (1½")	F140mm (5½") B 40-60mm (1⅞-2⅜")	w47mm (1⅞") x h76mm (3")	w47mm (1⅞") x h36mm (1⅞")
		Flat H36mm (1⅞")	F140mm (5½") B 40-60mm (1⅞-2⅜")	w47mm (1⅞") x h76mm (3")	w47mm (1⅞") x h36mm (1⅞")
		Round ø23mm (⅞")	F140mm (5½") B 40-60mm (1⅞-2⅜")	w47mm (1⅞") x h76mm (3")	w47mm (1⅞") x h36mm (1⅞")
		Round ø30mm (1⅓")	F140mm (5½") B 40-60mm (1⅞-2⅜")	w47mm (1⅞") x h76mm (3")	w47mm (1⅞") x h36mm (1⅞")
		Round ø50mm (2")	F140mm (5½") B 40-60mm (1⅞-2⅜")	w47mm (1⅞") x h76mm (3")	w47mm (1⅞") x h36mm (1⅞")

CUSTOM BRACKETS *Designed to suit any window.*

Custom Projection	Custom Fixing Plate	Uplift	Ceiling Brackets	Angled Brackets
				
<i>Specify the exact projection needed.</i>	<i>Relevant where space is restricted or weight is a concern.</i>	<i>Helps negotiate cornice & similar architectural features.</i>	<i>Specify exact drop required from ceiling.</i>	<i>The solution for tight and awkward locations.</i>

Handed Item - Left and Right version available
Custom Brackets shown are for illustration purposes. Brackets are designed on a project basis to specific requirements.

GLIDING OPTIONS

2C Gliders



For standard headings.
DropⓈ: 8mm (5⁄16")
Colour Options: White • Black

Wave® 2C Gliders



For use with wave tape.
DropⓈ: 8mm (5⁄16")
Wave® Pitch: 60mm (2½") • 80mm (3½")
Colour Options: White

RollersⓈ



For standard headings.
DropⓈ: 8mm (5⁄16")
Colour Options: White

Wave® RollersⓈ



For use with wave tape.
DropⓈ: 27mm (1½")
Wave® Pitch: 80mm (3½")
Colour Options: White


Ⓢ Glider/Roller drop from bottom of profile to bottom of eyelet

POLES

Poles are cut, bent and curved to suit individual requirements. When calculating the length of your pole, remember to allow tolerance beyond the width of the frame for the curtains to stack back to the edge of the window.

Poles exceeding the maximum length will be cut into equal parts unless otherwise specified. A pole joiner will be supplied.

Twin cord systems are always supplied in an even number of parts & will be supplied in a minimum of two sections.

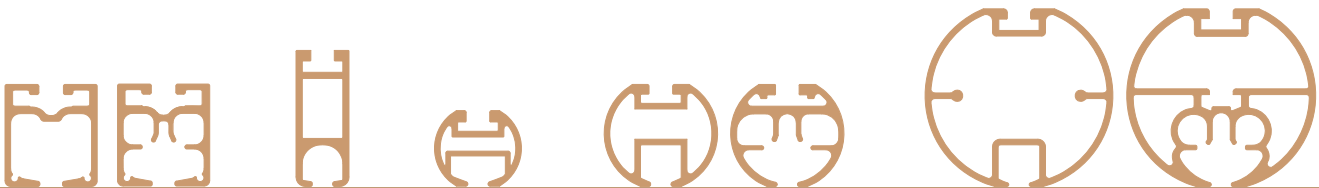				
Control Type	Size	Maximum distance between brackets	Maximum length in one piece	Standard Bend radius
Hand Drawn	Square H27mm (1½")	1000mm (39")	4000mm (157")Ⓢ	R300mm (12")
	Flat H36mm (1½")	1000mm (39")	4000mm (157")Ⓢ	R200mm (8")
	Round ø23mm (1½")	1000mm (39")	4000mm (157")Ⓢ	R150mm (6")
	Round ø30mm (1½")	1000mm (39")	4000mm (157")Ⓢ	R250mm (10")
	Round ø50mm (2")	1000mm (39")	4000mm (157")Ⓢ	R600mm (24")
Corded	Square H27mm (1½")	1000mm (39")	4000mm (157")Ⓢ	R300mm (12")
	Round ø30mm (1½")	1000mm (39")	4000mm (157")Ⓢ	R300mm (12")
	Round ø50mm (2")	1000mm (39")	4000mm (157")Ⓢ	R670mm (26")

Ⓢ Supplied in sections - Section lengths over 3.0m (118") will incur a handling charge Ⓢ Supplied as standard on systems over 3.0m (118") with single stack curtains
For full technical information, sizes and weights please download the specification guide - www.bradleycollection.com/downloads/

ACCESSORIES

Draw Rods

Fine

Standard




Draw rod length:
1000mm (39½")
Custom lengths available to order

Cord Retainer

All corded tracks are supplied as standard with a regional compliant retainer. This ensures that all cords are safely secured to the wall for child safety.

This will be supplied in the same finish as the system, unless advised otherwise.

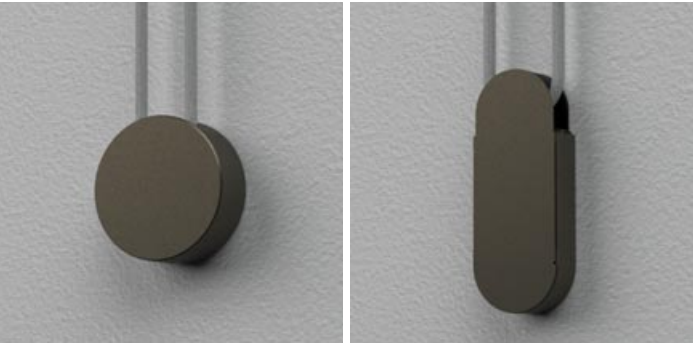

UK & European Retainer <i>BS EN 13120:2009+A12014 Compliant</i>	North America Retainer <i>2022 ANSI/WCMA Compliant</i>
Fixing plate size: ø46mm (1½")	Fixing plate size: w30mm (1½") x L76mm (3")

Cord Colour

Cord systems come as standard with white cord. A black option is available on request.





GLIDE

This collection sets a benchmark in drapery hardware. Hidden brackets, seamless joins, and perfectly matched pole and glider colours create a unified elevated aesthetic.


Pure Refinement, Perfectly concealed

Pictured: Round ø38mm (1½") Pole • Seamless • Charcoal - Matte

GLIDE

SEAMLESS END

Precision engineering achieves an uninterrupted, seamless end.

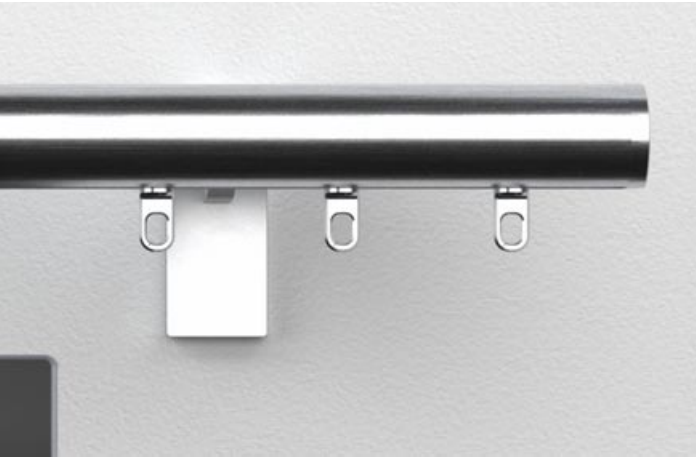

QUIET RUNNING

Within the channel, a low-friction coating works alongside improved roller and metal-coated roller designs to ensure quieter performance.



METALCOAT DETAILS

Glide includes optional Metalcoat gliding components, for an exact colour match to the pole.



RIPPLEFOLD OR SINE

Modern sinuous heading styles can be created, using both hook and tape or snap tape components.




CONCEALED BRACKETS

The bracket architecture is shared with Float and Drive, and keeps the front face of the pole clear of visible parts.



PRECISE JOINING

Innovative jointing ensures seamless, precision alignment between pole sections.

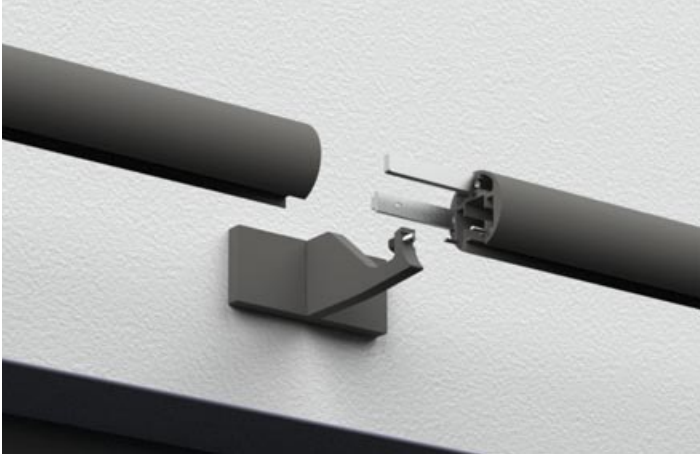

FLUSH CEILING

The rear fixing brackets allow for true flush ceiling installation.



BENT TO SHAPE

Glide profile can be accurately bent and curved to shape, with optional adjustable brackets, delivering installation flexibility.



FINISHES

Glide offers a striking palette of finishes, with a refined range of coat options to suit every scheme.

SHADES

A superb selection of opaque colours, all available in a choice of Matte, Satin or Gloss finish.

					
Cloud	Alabaster	Bone	Barley	Dusk	Mineral
					
Cream	Dove	Parchment	Millstone	Oatmeal	Stone
					
Clay	Grey Moss	Cocoa	Moss	Lead	Earth
					
Smoke	Frame Grey	Burnt Ash	Flint	Charcoal	Raven

ORGANICS

A textured finish, inspired by nature.




			
Ash Stone	Sand Stone	Iron	Obsidian

COAT OPTIONS



METALLICS

High metallic fleck coatings. Available in Satin and Gloss sheen levels.

		
Platinum	Champagne	Gold
		
Cognac	Antique Brass	Gunmetal
		
Bronzed	Pewter	

ANODICS

A flat metal colour group, with an anodised style.

		
Twilight	Glow	Sky
		
Sunrise	Storm	Glimmer
		
Sunset	Night Sky	Midnight

Pictured left to right:
ø30mm (1 3/8") Pole | Oblique • Sunrise | Spheric • Glow
Orbic • Storm | Ellipse • Sunset

GLIDE



Pictured: ø38mm (1½") Pole • Drum • Metalcoat Gliders • Electrum

CERAMICS

CERAKOTE®

Finished with ceramic Cerakote for industry leading protection and a flawless finish that endures daily life.

		
Frost ⊕	Titanium ⊕	Tungsten ⊕
		
Electrum ⊕	Golden Quartz ⊕	Burnt Bronze ⊕
		
Midnight Bronze ⊕	Serpentine ⊕	Blue Titanium ⊕
		
Copper ⊕	Cobalt ⊕	Graphite Black ⊕

CHROMATICS


Brushed and etched aluminium, elevated with modern tints. Understated luxury with an architectural edge.

Sealed in a clear, ceramic coating for lasting durability.




CERAKOTE

Pictured: ø38mm (1½") Pole • Planar • Metal Coat Gliders • Etched Brass

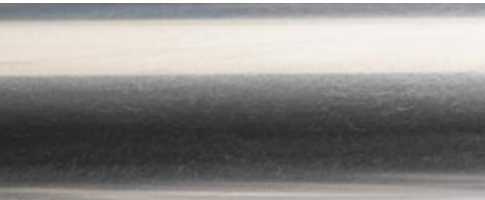


Burnished Aluminum ⊕

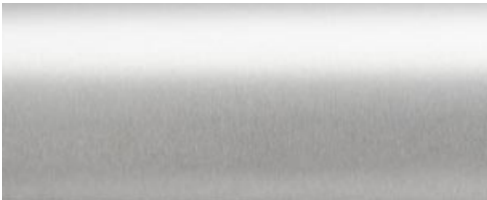


Matte Aluminum ⊕




Satin Aluminum ⊕

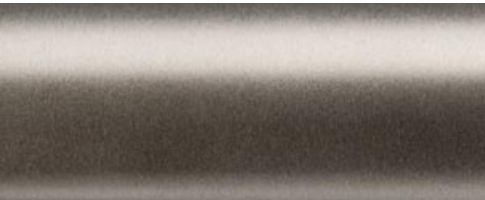


Etched Graphite ⊕

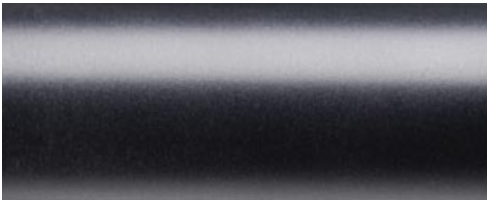

Etched Black ⊕

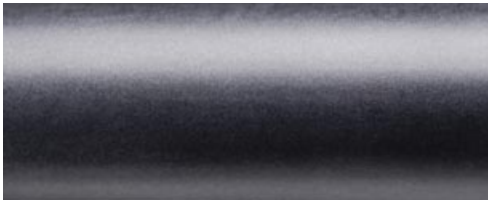

Soft Black ⊕

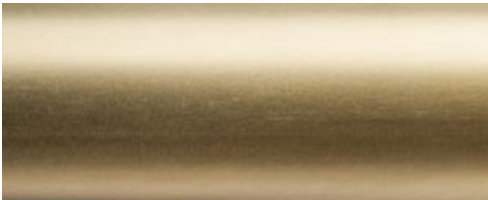


Burnished Brass ⊕




Soft Brass ⊕




Etched Brass ⊕

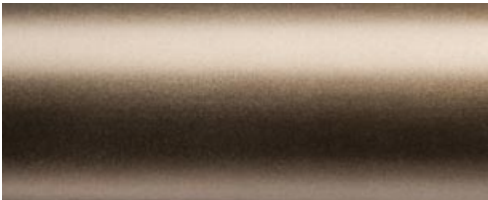

Burnished Bronze ⊕

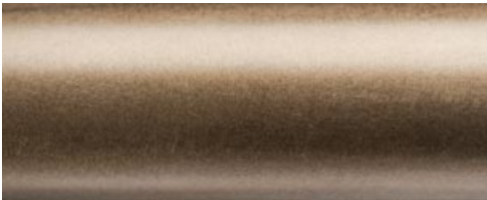

Soft Bronze ⊕

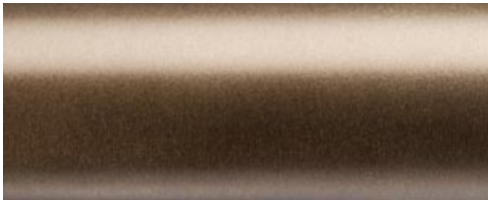

Etched Bronze ⊕

GLIDE

⊕ A finishing charge will apply
Due to printing limitations colours in this brochure may not be accurate, Samples are available on request - www.bradleycollection.com/samples/



Pictured: ø30mm (1⅜") Pole • Seamless • Metalcoat Gliders • Antique Brass - Satin

FINIALS

Glide’s continuous ends express a seamless, contemporary aesthetic. The Seamless end cap is supplied as standard, creating pure, minimalist lines.

For added refinement, understated geometric finials introduce a hint of decorative detail.



Seamless® *Supplied as standard*

ø30mm (1⅜") **Inclusive Length** 5mm (¾")
ø38mm (1½") **Inclusive Length** 5mm (¾")



Orbic®

ø30mm (1⅜") **Inclusive Length** 13mm (½")
ø38mm (1½") **Inclusive Length** 15mm (⅝")



Orbic Grand

ø30mm (1⅜") **Inclusive Length** 13mm (½")
ø38mm (1½") **Inclusive Length** 15mm (⅝")



Drum

ø30mm (1⅜") **Inclusive Length** 21mm (1⅜")
ø38mm (1½") **Inclusive Length** 23mm (7⁄8")



Tulip

ø30mm (1⅜") **Inclusive Length** 35mm (1⅜")
ø38mm (1½") **Inclusive Length** 43mm (1⅞")



Oblique

ø30mm (1⅜") **Inclusive Length** 21mm (1⅜")
ø38mm (1½") **Inclusive Length** 23mm (7⁄8")



Planar

ø30mm (1⅜") **Inclusive Length** 25mm (1")
ø38mm (1½") **Inclusive Length** 29mm (1⅜")



Ellipse

ø30mm (1⅜") **Inclusive Length** 29mm (1⅜")
ø38mm (1½") **Inclusive Length** 33mm (1⅝")



Spheric

ø30mm (1⅜") **Inclusive Length** 53mm (2⅛")
ø38mm (1½") **Inclusive Length** 65mm (2⅝")

© Please note that if this option is selected finials cannot be added at a later date. | 🌀 Removable version available on request, Pole is supplied without seamless option or access ports. For full technical information, sizes and weights please download the specification guide - www.bradleycollection.com/downloads/

BRACKET OPTIONS

SINGLE *For straightforward applications.*

Side 	Diameter ø30mm (1⅜") ø38mm (1½")	Projection from wall to pole centre 60mm (2⅝") • 100mm (4") 100mm (4")	Fixing plate size w30mm (1⅜") x h70mm (2¾") w38mm (1½") x h89mm (3½")
Mid 	Diameter ø30mm (1⅜") ø38mm (1½")	Projection from wall to pole centre 60mm (2⅝") • 100mm (4") 100mm (4")	Fixing plate size w70mm (2¾") x h30mm (1⅜") w89mm (3½") x h38mm (1½")
Flush Ceiling 	Diameter ø30mm (1⅜") ø38mm (1½")	Drop from ceiling to top of pole 7mm (¼") 7mm (¼")	Fixing plate size w70mm (2¾") x h30mm (1⅜") w70mm (2¾") x h30mm (1⅜")

RECESS *Designed for rebates.*

Recess <i>With hook stop</i> 	Diameter ø30mm (1⅜") ø38mm (1½")	Depth off wall 10mm (⅜") 10mm (⅜")	Fixing plate size ø38mm (1½") ø48mm (1⅞")
--	---	---	--

ADJUSTABLE *Designed to give flexibility during installation.*

Side 	Diameter ø30mm (1⅜") ø38mm (1½")	Projection from wall to pole centre Min. 90mm (3⅝") Max. 110mm (4⅝") Min. 90mm (3⅝") Max. 110mm (4⅝")	Fixing plate size w38mm (1½") x h70mm (2¾") w46mm (1⅞") x h89mm (3½")
Mid 	Diameter ø30mm (1⅜") ø38mm (1½")	Projection from wall to pole centre Min. 90mm (3⅝") Max. 110mm (4⅝") Min. 90mm (3⅝") Max. 110mm (4⅝")	Fixing plate size w70mm (2¾") x h30mm (1⅜") w89mm (3½") x h38mm (1½")

DOUBLE *Designed for layered shading.*

Side 	Diameter F ø30mm (1⅜") B ø30mm (1⅜") F ø38mm (1½") B ø30mm (1⅜") F ø38mm (1½") B ø38mm (1½")	Projection from wall to pole centre F 160mm (6⅝") B 60mm (2⅝") F 160mm (6⅝") B 60mm (2⅝") F 160mm (6⅝") B 60mm (2⅝")	Fixing plate size w57mm (2¼") x h114mm (4½") w57mm (2¼") x h114mm (4½") w57mm (2¼") x h114mm (4½")
Mid 	Diameter F ø30mm (1⅜") B ø30mm (1⅜") F ø38mm (1½") B ø30mm (1⅜") F ø38mm (1½") B ø38mm (1½")	Projection from wall to pole centre F 160mm (6⅝") B 60mm (2⅝") F 160mm (6⅝") B 60mm (2⅝") F 160mm (6⅝") B 60mm (2⅝")	Fixing plate size w114mm (4½") x h57mm (2¼") w114mm (4½") x h57mm (2¼") w114mm (4½") x h57mm (2¼")
Flush Partition 	Diameter F ø30mm (1⅜") B ø30mm (1⅜") F ø38mm (1½") B ø38mm (1½")	Drop from ceiling to top of pole 7mm (¼") 7mm (¼")	Fixing plate size w89mm (3½") x h38mm (1½") w89mm (3½") x h38mm (1½")

CUSTOM BRACKETS *Designed to suit any window. *

Custom Projection 	Custom Fixing Plate 	Uplift 	Ceiling Brackets 	Angled Brackets 
<i>Specify the exact projection needed.</i>	<i>Relevant where space is restricted or weight is a concern.</i>	<i>Helps negotiate cornice & similar architectural features.</i>	<i>Specify exact drop required from ceiling.</i>	<i>The solution for tight and awkward locations.</i>

GLIDING OPTIONS



For standard headings.

DropⓈ: 15mm (5⁄8")

Colour Options: Gypsum • Anthracite

For standard headings.


DropⓈ: 15mm (5⁄8")

Colour Options: Gypsum • Anthracite

For standard headings.

DropⓈ: 15mm (5⁄8")

Colour Options: System ColourⓈ

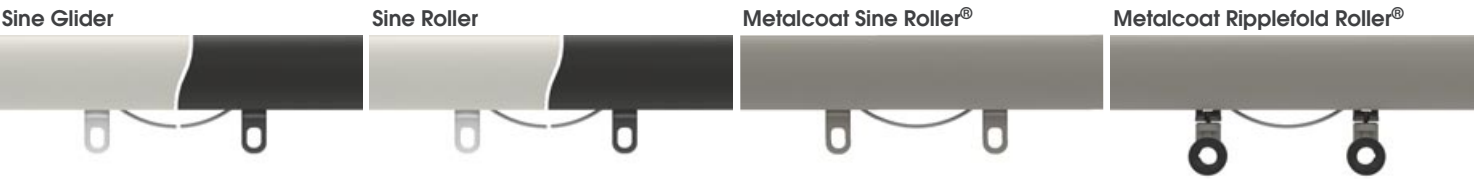

For use with wave-style tape.

DropⓈ: 15mm (5⁄8")

Sine Pitch: 80mm (3 1⁄8")

Colour Options: Gypsum • Anthracite

For use with wave-style tape.

DropⓈ: 15mm (5⁄8")

Sine Pitch: 60mm (2 3⁄8") • 80mm (3 1⁄8")

Colour Options: Gypsum • Anthracite

For use with wave-style tape.

DropⓈ: 15mm (5⁄8")

Sine Pitch: 60mm (2 3⁄8") • 80mm (3 1⁄8")

Colour Options: System ColourⓈ

For use with snap tape.

DropⓈ: 18mm (1 1⁄8")

Ripplefold® Fullness: 80% • 100%

Colour Options: System ColourⓈ


Ⓢ Glider/Roller drop from bottom of profile to bottom of eyelet • Ripplefold drop from bottom of profile to centre of eyelet.

Ⓢ Metalcoat Gliders, supplied in satin finish on Matte & Gloss finished systems

POLES

Poles are cut, bent and curved to suit individual requirements. When calculating the length of your pole, remember to allow tolerance beyond the width of the frame for the curtains to stack back to the edge of the window.

Poles exceeding the maximum length will be cut into equal parts unless otherwise specified. A pole joiner will be supplied.



Size	Maximum distance between brackets	Maximum length in one piece	Standard Bend radius
ø30mm (1 1⁄8")	1000mm (39")	4000mm (157")Ⓢ	Ⓢ250mm (10")
ø38mm (1 1⁄2")	1000mm (39")	4000mm (157")Ⓢ	Ⓢ400mm (16")

Ⓢ Supplied in sections - Section lengths over 3.0m (118") will incur a handling charge

For full technical information, sizes and weights please download the specification guide - www.bradleycollection.com/downloads/

ACCESSORIES

Draw Rods

Seamless



Draw rod length:

1000mm (39 3⁄8")

Custom lengths available to order

Pictured: Round ø38mm (1 1⁄2") Pole • Seamless • Raven - Satin



GLIDE



⚡ | ePOLE

ePole is a plug-and-play curtain pole with a quiet, powerful motor and sleek remote. A discreet USB bridge enables smartphone or voice operation. Simple to install, pairs perfectly with Gliderpole brackets and finials.

Smart design. Truly Plug & Play.

Pictured: ø38mm (1½") ePole • Discus • Antique Brass - Satin

PLUG & PLAY MOTORS

Engineered for ease, the system uses a quiet and powerful motor. The battery motor offers a simple, cable-free install, while the mains option requires a high-level wall socket.



CONTROLLED YOUR WAY

The system can be controlled via hand-held remote control, Smart device App or voice control.

Pairing and app connection is intuitive and straightforward.



DISCREET DESIGN

The 38mm (1½”) pole is paired with an embedded cartridge and a polymer motor adaptor, allowing single or twin drives to sit discreetly behind the curtain.



BRACKET SUITE

The ePole is compatible with the entire Gliderpole bracket suite, offering wall and ceiling fix, double brackets for layered shading and adjustable brackets for tricky installs.




EASIER INSTALLATION

The ePole utilises the brackets from the proven Gliderpole collection and incorporates the clever T-bar guide, which perfectly indexes the tapped hole and grub screw.




SMOOTH RUNNING

Gliders and Rollers are available in either Gypsum or Anthracite colours.

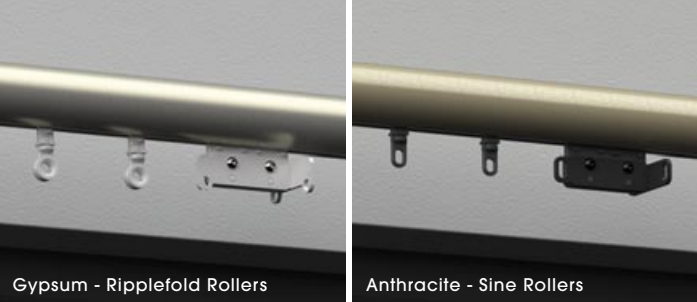

BENT OR CURVED TO SHAPE

ePole has been developed to fit any window shape. Precision bending and adjustable brackets ensure a perfect fit.

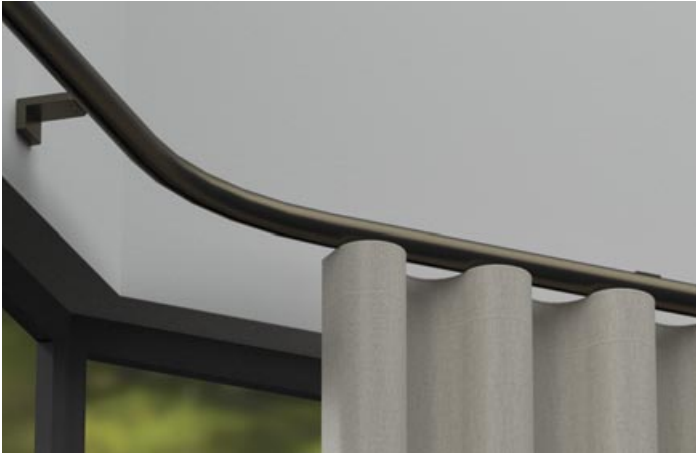

MODERN HEADINGS

Modern sinuous heading styles can be created, utilising either hook and tape or snap-tape components.



FINISHES

A full range of colours and finishes are available, with a choice of coat options throughout.


COAT OPTIONS



Pictured:
ø38mm (1½") ⚡ | ePole • Flush End Cap • Dove - Matte


METALLICS

High metallic fleck coatings.
Available in Satin and Gloss sheen levels.

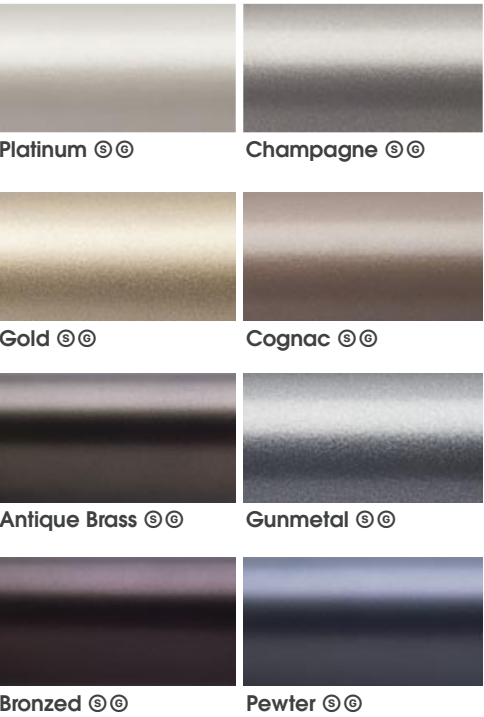


ANODICS

A flat metal colour group, with an anodised style surface texture.

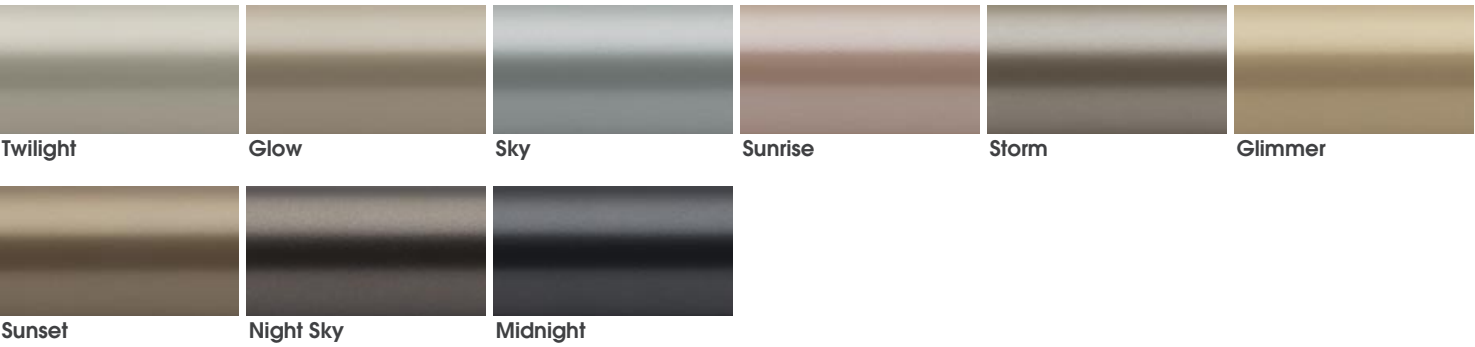

SHADES

A superb selection of opaque colours, all available in a choice of Matte, Satin or Gloss finish.

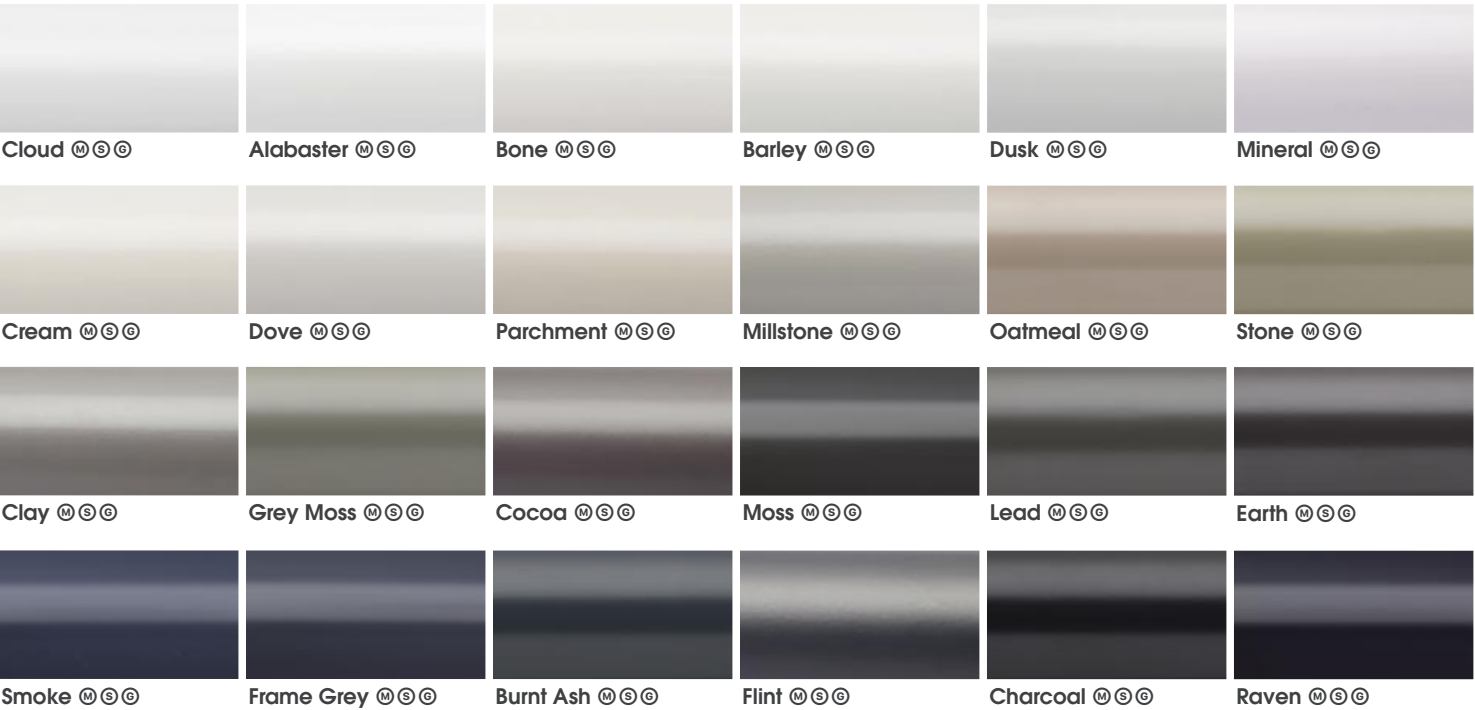

Due to printing limitations colours in this brochure may not be accurate, Samples are available on request - www.bradleycollection.com/samples/

FINIALS

Clean & Understated

This design group is a thoughtfully scaled edit of the leading Gliderpole designs.

All finials are characterised by lightness, poise and simple lines.

Pictured:
ø38mm (1½") ⚡ | ePole • Flush Stud • Sunset



Flush End Cap *Supplied as standard*
Round ø38mm (1½") Inclusive Length 3mm (⅛")



Flush Stud
Round ø38mm (1½") Inclusive Length 18mm (⅞")



Stud
Round ø38mm (1½") Inclusive Length 18mm (⅞")



Disc
Round ø38mm (1½") Inclusive Length 12mm (½")



Squat Disc
Round ø38mm (1½") Inclusive Length 32mm (1¼")



Faceted Disc
Round ø38mm (1½") Inclusive Length 37mm (1½")



Pebble
Round ø38mm (1½") Inclusive Length 42mm (1⅝")



Ball
Round ø38mm (1½") Inclusive Length 66mm (2⅝")

FINIALS



Glamorous & Flamboyant

Classical design cues have been re-interpreted to suit modern style sensitivity.

Pictured:
ø38mm (1½") ⚡ | ePole • Jewel • Raven - Satin



Halo

ø38mm (1½") Inclusive Length 2mm (⅛")



Aura

ø38mm (1½") Inclusive Length 2mm (⅛")



Orbit

ø38mm (1½") Inclusive Length 40mm (1½")



Discus

ø38mm (1½") Inclusive Length 44mm (1¾")



Jewel

ø38mm (1½") Inclusive Length 42mm (1⅝")



Flute

ø38mm (1½") Inclusive Length 69mm (2⅞")



Squat Globe

ø38mm (1½") Inclusive Length 63mm (2½")



Globe

ø38mm (1½") Inclusive Length 92mm (3⅝")



Ribbed Globe

ø38mm (1½") Inclusive Length 92mm (3⅝")



Charm

ø38mm (1½") Inclusive Length 85mm (3⅜")



Templar

ø38mm (1½") Inclusive Length 92mm (3⅝")



Crystal Templar*

ø38mm (1½") Inclusive Length 92mm (3⅝")

*: Crystal Finials should not be positioned in direct sunlight
For full technical information, sizes and weights please download the specification guide - www.bradleycollection.com/downloads/

BRACKET OPTIONS

SINGLE *For straightforward applications.*

Side	Mid	Diameter	Projection from wall to pole centre	Side Fixing plate size	Mid Fixing plate size
		Round $\varnothing$ 38mm (1½")	60mm (2⅜") • 100mm (4")	w32mm (1¼") x h70mm (2¾")	w32mm (1¼") x h38mm (1½")
Side Heavy Duty	Mid Heavy Duty	Diameter	Projection from wall to pole centre	Side Fixing plate size	Mid Fixing plate size
		Round $\varnothing$ 38mm (1½")	100mm (4") • 140mm (5½")	w47mm (1⅞") x h76mm (3")	w47mm (1⅞") x h36mm (1⅞")
Flush Heavy Duty		Diameter	Drop from ceiling to top of pole	Fixing plate size	
		Round $\varnothing$ 38mm (1½")	3mm (⅛")	w40mm (1⅞") x L59mm (2⅝")	

RECESS *Designed for rebates.*

Recess <i>With hook stop</i>	Diameter	Depth off wall	Fixing plate size
	Round $\varnothing$ 38mm (1½")	14mm (⅝")	w50mm (2") x h41mm (1⅝")

ADJUSTABLE *Designed to give flexibility during installation.*

Side	Mid	Diameter	Projection from wall to pole centre	Side Fixing plate size	Mid Fixing plate size
		Round $\varnothing$ 38mm (1½")	Min.80mm (3⅜") Max.130mm (5⅝")	w47mm (1⅞") x h76mm (3")	w47mm (1⅞") x h36mm (1⅞")

DOUBLE *Designed for layered shading.*

Side	Mid	Diameter	Projection from wall to pole centre	Side Fixing plate size	Mid Fixing plate size
		Round $\varnothing$ 38mm (1½")	1140mm (5½") B 40-60mm (1⅞-2⅜")	w47mm (1⅞") x h76mm (3")	w47mm (1⅞") x h36mm (1⅞")

CUSTOM BRACKETS *Specialist designs can be produced for awkward or unusual installations.*

Custom Projection	Custom Fixing Plate	Uplift	Ceiling Brackets	Angled Brackets
				
<i>Specify the exact projection needed.</i>	<i>Relevant where space is restricted or weight is a concern.</i>	<i>Helps negotiate cornice & similar architectural features.</i>	<i>Specify exact drop required from ceiling.</i>	<i>The solution for tight and awkward locations.</i>

Custom Brackets shown are for illustration purposes. Brackets are designed on a project basis to specific requirements.

SYSTEMS

Double ePole systems may be specified with a motor to front and rear.
It is also possible to specify a motor to the main curtain and a manual 38mm (1½") pole to the rear.



MOTOR

Key features

Maximum length: 6 Metres (19ft)Ⓢ

Suitable for Bay Windows: ✓

Suitable for Curved Windows: ✓

Header types: Standard, Sine and Ripplefold®

Power Options: Battery & Mains powered

Touch and go operation: ✓

Obstacle Detection: ✓

Manual operation during power failure: ✓

Noise level: at 1000mm (3') <35dBA

MOTOR OPTIONS

🔋 AM50 Motor



Plug & Play: Requires no pre-wiring.

Power Type: Battery - Recharable via USB-C
Control Type: Remote • App Control

⚡ AM50 Motor



Plug & Play: Requires high-level, adjacent power socket.

Power Type: Mains power - 1m (39") cable with regional plug
Plug Type: UK • North American
Control Type: Remote • App Control
Connectivity: Ethernet Port

CONTROL OPTIONS

Remote Controls

Multi-channel hand held remote as standard.



Channels: 6
Frequency: 433MHz
Colour Options: White

App & Voice Controls

App control via USB Hub & Tuya integration.



The system may be seamlessly controlled through the Tuya app for effortless convenience.

Tuya integration also allows linking voice control systems for ultimate freedom.



GLIDING OPTIONS

Glider



For standard headings.

Drop@: 20mm (13⁄16")
Colour Options: Gypsum • Anthracite

Roller



For standard headings.

Drop@: 20mm (13⁄16")
Colour Options: Gypsum • Anthracite

Sine Glider



For use with wave-style tape.

Drop@: 20mm (13⁄16")
Sine Pitch: 80mm (31⁄8")
Colour Options: Gypsum • Anthracite

Sine Roller



For use with wave-style tape.

Drop@: 20mm (13⁄16")
Sine Pitch: 60mm (23⁄8") • 80mm (31⁄8")
Colour Options: Gypsum • Anthracite

Ripplefold Roller



For use with snap tape.

Drop@: 20mm (13⁄16")
Ripplefold® Fullness: 80% • 100%
Colour Options: Gypsum • Anthracite

Ⓢ Glider/Roller drop from bottom of profile to bottom of eyelet • Ripplefold drop from bottom of profile to centre of eyelet.

POLES

Poles are cut, bent and curved to suit individual requirements. When calculating the length of your pole, remember to allow tolerance beyond the width of the frame for the curtains to stack back to the edge of the window.

Poles exceeding the maximum length will be cut into equal parts unless otherwise specified. A pole joiner will be supplied.



Size	Maximum distance between brackets	Maximum length in one piece	Standard Bend radius
ø38mm (1½")	1000mm (39")	4000mm (157")Ⓢ	ø400mm (16")

Ⓢ Supplied in sections - Section lengths over 3.0m (118") will incur a handling charge
For full technical information, sizes and weights please download the specification guide - www.bradleycollection.com/downloads/



⚡ | DRIVE(2)


Innovative and cutting edge, Drive 2 redefines electrically operated curtain poles. An evolution of previous designs, it combines a full round profile with clean, modern lines and tailored solutions for every shaped window - all powered by the world's leading motor brands.

Powered Precision. Redefined Design

Pictured: ø38mm (1½") ⚡Drive Pole • Powered by Lutron • Planar Drive Rings • Antique Brass - Satin


LEADING MOTOR OPTIONS

Drive can be paired with motors from the world's leading brands, offering solutions from discreet battery operation to fully integrated home automation.

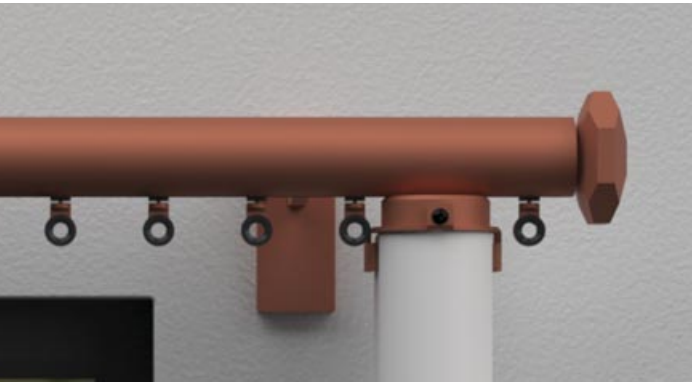

PRECISE JOINING

A smart jointing system ensures perfect alignment between pole sections.

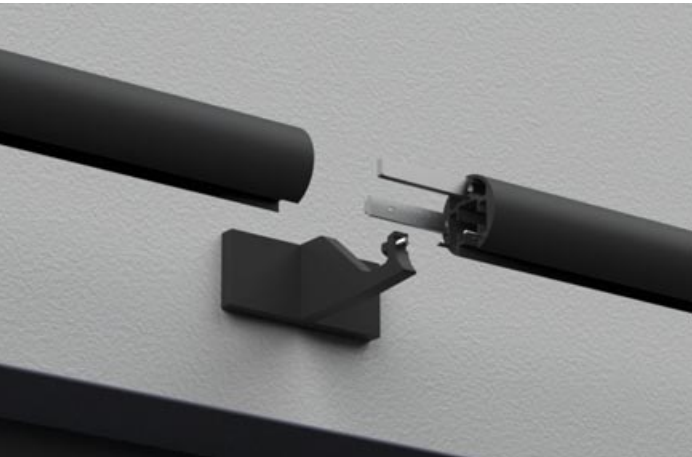


MOTOR ADAPTOR

For optimal curtain appearance, motors may be positioned either in-line (*for standard pleated headings*) or at 90 degrees to the pole (*for wave-shaped or Ripplefold headings*).



BENT TO SHAPE

Drive profile can be accurately bent and curved to shape, with optional adjustable brackets, delivering installation flexibility.

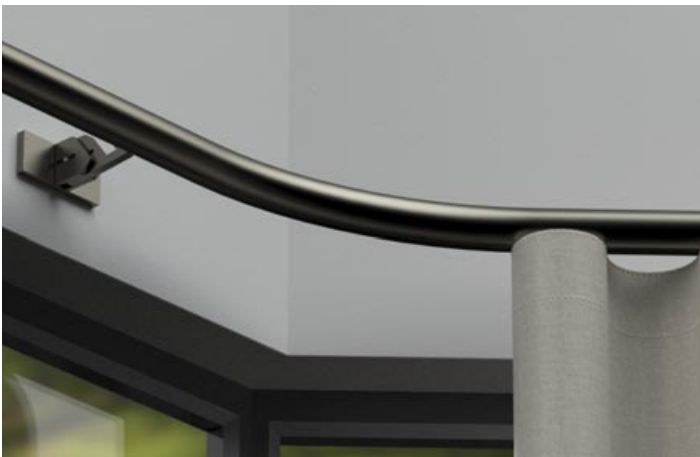

METALCOAT DETAILING

Gliders are offered in Gypsum & Anthracite as standard, with coated metal options available for an exact colour match. A low-friction coating supports improved roller design, offering quieter running.




FLUSH CEILING

The rear-fixed bracket is engineered to achieve true flush ceiling installation.



RINGS

For a decorative finish, rings are available, moved by the master carrier. Sinuous heading style with rings also offered. Bracket architecture ensures the front face of the pole remains clear of visible parts, completing the look.

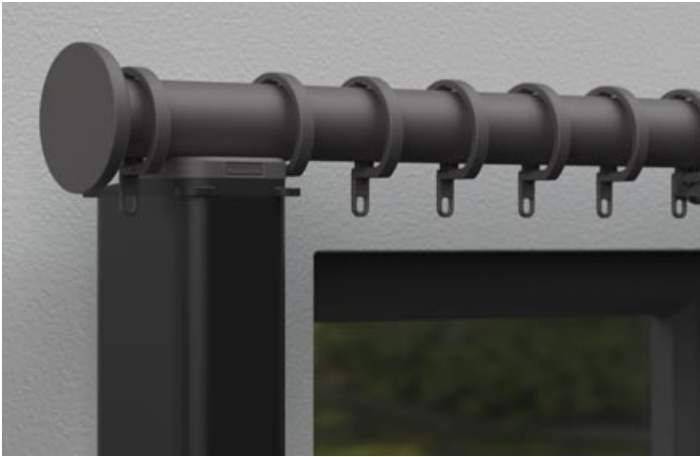

MODERN HEADINGS

Modern sinuous heading styles can be created, using both hook and tape or snap tape components.



FINISHES

This stunning palette of colours and finishes is available on all Drive poles and components, with a choice of coat options throughout.

SHADES

A superb selection of opaque colours, all available in a choice of Matte, Satin or Gloss finish.

					
Cloud	Alabaster	Bone	Barley	Dusk	Mineral
					
Cream	Dove	Parchment	Millstone	Oatmeal	Stone
					
Clay	Grey Moss	Cocoa	Moss	Lead	Earth
					
Smoke	Frame Grey	Burnt Ash	Flint	Charcoal	Raven

ORGANICS

A textured finish, inspired by nature.



			
Ash Stone	Sand Stone	Iron	Obsidian

COAT OPTIONS





METALLICS

High metallic fleck coatings. Available in Satin and Gloss sheen levels.

		
Platinum	Champagne	Gold
		
Cognac	Antique Brass	Gunmetal
		
Bronzed	Pewter	

ANODICS

A flat metal colour group, with an anodised style.

		
Twilight	Glow	Sky
		
Sunrise	Storm	Glimmer
		
Sunset	Night Sky	Midnight

Pictured left to right:
ø38mm (1½") Pole | Spheric • Charcoal - Matte | Orbic Grand • Stone - Matte | Seamless • Lead - Matte
Tulip • Moss - Matte | Planar • Earth - Matte



Pictured: ø38mm (1½") ⚡ Drive Pole • Powered by Lutron
Drum • Metalcoat Rollers • Burnt Bronze

CERAMICS

CERAKOTE®

Finished with ceramic Cerakote for industry leading protection and a flawless finish that endures daily life.

		
Frost ⊕⊗	Titanium ⊕⊗	Tungsten ⊕⊗
		
Electrum ⊕⊗	Golden Quartz ⊕⊗	Burnt Bronze ⊕⊗
		
Midnight Bronze ⊕⊗	Serpentine ⊕⊗	Blue Titanium ⊕⊗
		
Copper ⊕⊗	Cobalt ⊕⊗	Graphite Black ⊕⊗

⊕ A finishing charge will apply | ⊗ Not available with Drive rings

CHROMATICS


Brushed and etched aluminium, elevated with modern tints. Understated luxury with an architectural edge.

Sealed in a clear ceramic coating for durability.


CERAKOTE®

Pictured: ø38mm (1½”) ⚡Drive Pole • Powered by Silent Gliss • Orbic • Metalcoat Rollers • Etched Brass

⚡DRIVE(2)

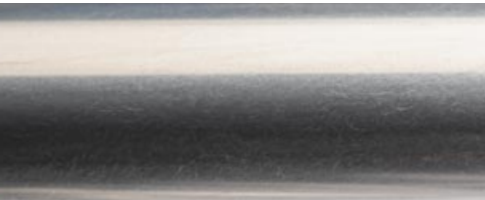


Burnished Aluminum ☉☉

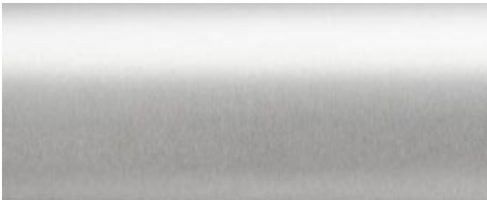

Matte Aluminum ☉☉



Satin Aluminum ☉☉

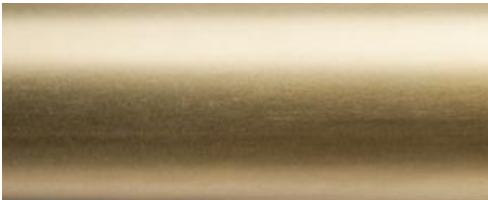


Burnished Brass ☉☉




Soft Brass ☉☉




Etched Brass ☉☉

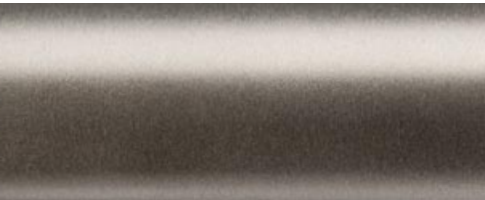


Etched Graphite ☉☉

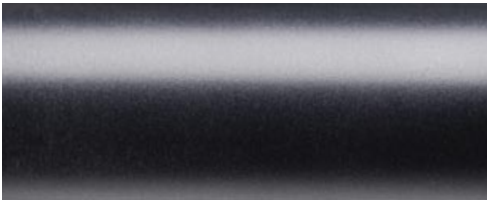


Etched Black ☉☉

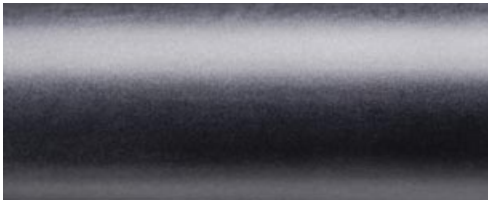


Soft Black ☉☉

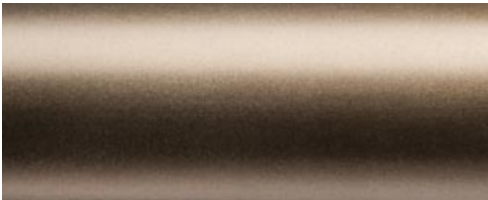

Burnished Bronze ☉☉

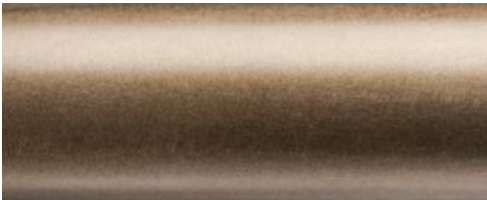

Soft Bronze ☉☉

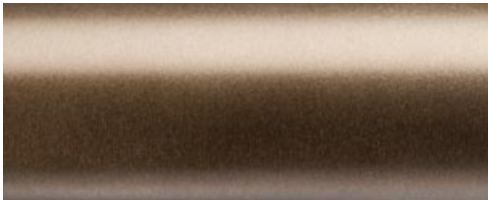

Etched Bronze ☉☉

☉ A finishing charge will apply | ☉ Not available with Drive rings
Due to printing limitations colours in this brochure may not be accurate. Samples are available on request - www.bradleycollection.com/samples/



Pictured: ø38mm (1½") ⚡ Drive Pole • Powered by Somfy • Seamless • Metalcoat Rollers • Charcoal - Satin

FINIALS

The integrated ends embody seamless design. Supplied as standard, Seamless end caps create clean, minimalism, while geometric finials offer understated decorative accents.



Seamless® *Supplied as standard*

ø38mm (1½") Inclusive Length 5mm (¾")



Orbic

ø38mm (1½") Inclusive Length 15mm (⅝")



Orbic Grand

ø38mm (1½") Inclusive Length 15mm (⅝")



Drum

ø38mm (1½") Inclusive Length 23mm (⅞")



Tulip

ø38mm (1½") Inclusive Length 43mm (1⅞")



Oblique

ø38mm (1½") Inclusive Length 23mm (⅞")



Planar

ø38mm (1½") Inclusive Length 29mm (1⅛")



Ellipse

ø38mm (1½") Inclusive Length 33mm (1⅝")



Spheric

ø38mm (1½") Inclusive Length 65mm (2⅝")

Ⓢ Please note that if this option is selected finials cannot be added at a later date.
For full technical information, sizes and weights please download the specification guide - www.bradleycollection.com/downloads/

BRACKET OPTIONS

SINGLE *For straightforward applications.*

Side 	Diameter ø38mm (1½")	Projection from wall to pole centre 100mm (4")	Fixing plate size w38mm (1½") x h89mm (3½")
Mid 	Diameter ø38mm (1½")	Projection from wall to pole centre 100mm (4")	Fixing plate size w89mm (3½") x h38mm (1½")
Flush Ceiling 	Diameter ø38mm (1½")	Drop from ceiling to top of pole 1mm (⅙")	Fixing plate size w70mm (2¾") x h30mm (1⅜")
Ceiling <i>For systems with Rings</i> 	Diameter ø38mm (1½")	Drop from ceiling to top of pole 7mm (¼")	Fixing plate size w70mm (2¾") x h30mm (1⅜")

RECESS *Designed for rebates.*

Recess <i>With hook stop</i> 	Diameter ø38mm (1½")	Depth off wall 10mm (⅜")	Fixing plate size ø48mm (1⅞")
---	--	--	---

ADJUSTABLE *Designed to give flexibility during installation.*

Side 	Diameter ø38mm (1½")	Projection from wall to pole centre Min.90mm (3⅝") Max.110mm (4⅝")	Fixing plate size w46mm (1⅞") x h89mm (3½")
Mid 	Diameter ø38mm (1½")	Projection from wall to pole centre Min.90mm (3⅝") Max.110mm (4⅝")	Fixing plate size w89mm (3½") x h38mm (1½")

DOUBLE *Designed for layered shading.*

Side 	Diameter Fø38mm (1½") Bø38mm (1½") <i>Optional Drive + Glide/Float System</i> Fø38mm (1½") Bø30mm (1⅜") Fø38mm (1½") Bø38mm (1½")	Projection from wall to pole centre F200mm (8") B100mm (4") F160mm (6⅝") B60mm (2⅜") F160mm (6⅝") B60mm (2⅜")	Fixing plate size w57mm (2¼") x h114mm (4½") w57mm (2¼") x h114mm (4½") w57mm (2¼") x h114mm (4½")
Mid 	Diameter Fø38mm (1½") Bø38mm (1½") <i>Optional Drive + Glide/Float System</i> Fø38mm (1½") Bø30mm (1⅜") Fø38mm (1½") Bø38mm (1½")	Projection from wall to pole centre F200mm (8") B100mm (4") F160mm (6⅝") B60mm (2⅜") F160mm (6⅝") B60mm (2⅜")	Fixing plate size w114mm (4½") x h57mm (2¼") w114mm (4½") x h57mm (2¼") w114mm (4½") x h57mm (2¼")
Flush Partition 	Diameter Fø38mm (1½") Bø38mm (1½")	Drop from ceiling to top of pole 1mm (⅙")	Fixing plate size w89mm (3½") x h38mm (1½")
Partition <i>For systems with Rings</i> 	Diameter Fø38mm (1½") Bø38mm (1½")	Drop from ceiling to top of pole 7mm (¼")	Fixing plate size w89mm (3½") x h38mm (1½")

CUSTOM BRACKETS *Designed to suit any window.*

Custom Projection 	Custom Fixing Plate 	Uplift 	Ceiling Brackets 	Angled Brackets 
Specify the exact projection needed.	Relevant where space is restricted or weight is a concern.	Helps negotiate cornice & similar architectural features.	Specify exact drop required from ceiling.	The solution for tight and awkward locations.

GLIDING OPTIONS

Glider



For standard headings.

DropⓈ: 15mm (5/8")
Colour Options: Gypsum • Anthracite

Roller



For standard headings.

DropⓈ: 15mm (5/8")
Colour Options: Gypsum • Anthracite

Metalcoat Roller®



For standard headings.

DropⓈ: 15mm (5/8")
Colour Options: System ColourⓈ

Sine Glider



For use with wave-style tape.

DropⓈ: 15mm (5/8")
Sine Pitch: 80mm (3 1/8")
Colour Options: Gypsum • Anthracite

Sine Roller



For use with wave-style tape.

DropⓈ: 15mm (5/8")
Sine Pitch: 60mm (2 3/8") • 80mm (3 1/8")
Colour Options: Gypsum • Anthracite

Metalcoat Sine Glider®



For use with wave-style tape.

DropⓈ: 15mm (5/8")
Sine Pitch: 60mm (2 3/8") • 80mm (3 1/8")
Colour Options: System ColourⓈ

Metalcoat Ripplefold Roller®




For use with snap tape.

DropⓈ: 18mm (1 1/16")
Ripplefold® Fullness: 80% • 100%
Colour Options: System ColourⓈ


Ⓢ Glider/Roller drop from bottom of profile to bottom of eyelet • Ripplefold drop from bottom of profile to centre of eyelet.
Ⓢ Metalcoat Gliders, supplied in satin finish on Matte & Gloss finished systems

RING OPTIONS

Drive rings are engineered with acetal rollers and liners for smooth operation and a consistent upright position. By design, they pass brackets flawlessly.



Gypsum Roller & Liner

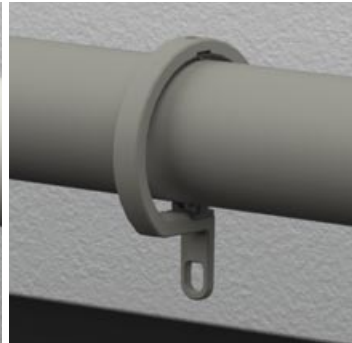

Anthracite Roller & Liner

RingⓈ



For standard headings.

Ⓢ38mm (1 1/2") Ring dropⓈ: 62mm (2 7/16")

Sine RingⓈ



For use with wave-style tape.


Ⓢ38mm (1 1/2") Ring dropⓈ: 62mm (2 7/16")
Sine Pitch: 80mm (3 1/8")

Ⓢ Drive rings not available in Ceramic or Chromatic finishes | Ⓢ Ring drop from top of pole to bottom of ringlet
For finish colour coordination see the specification guide www.bradleycollection.com/downloads/

POLES

Poles are cut, bent and curved to suit individual requirements. When calculating the length of your pole, remember to allow tolerance beyond the width of the frame for the curtains to stack back to the edge of the window.

Poles exceeding the maximum length will be cut into equal parts unless otherwise specified. A pole joiner will be supplied.



⚡ DRIVE (2)

Size	Maximum distance between brackets	Maximum length in one piece	Standard Bend radius
Ⓢ38mm (1 1/2")	1000mm (39")	4000mm (157")Ⓢ	Ⓢ400mm (16")

Double Drive systems may be specified with a motor to front and rear. It is also possible to specify a motor to the main curtain and a manual pole to the rear. Simply specify either **GLIDE** or **FLOAT** Ⓢ30mm (1 3/16") or 38mm (1 1/2") for the rear.



For full technical information, sizes and weights please download the specification guide - www.bradleycollection.com/downloads/

SYSTEM OPTIONS

Systems can be specified with your preferred motor and control system. Choose drives from Lutron, Somfy or Silent Gliss

POWERED BY



Key features

Power Options: Mains powered

Suitable for Bay Windows: ✓

Touch and go operation: ✗

Manual operation during power failure: ✓

Noise level at 1000mm (3'): <44dBA

Control Options: Lutron® QS Home Wireless Remote & App Control

Home automation systems

MOTOR OPTIONS

⚡ D105



Requires professional installation.

Power Type: Mains power

Control Type: Wired or Remote via Radio dongle

Colour: White

⚡ D145



Requires professional installation.

Power Type: Mains power

Control Type: Wired or Remote via Radio dongle

Colour: White

⚡ D175



Requires professional installation.

Power Type: Mains power

Control Type: Wired or Remote via Radio dongle

Colour: White

CONTROL OPTIONS

Remote Controls
Pico

Single channel hand held remote control options available.



Protocol: Sivoia QS wireless system

Channels: 1

Frequency: 433MHz

Colour: White

App Controls
RA2 Select Hub

Lutron shading systems can be controlled via Lutron App or through smart devices.



Protocol: Sivoia QS wireless system

Compatibility: Alexa • Google Home

Frequency: 433MHz • 868MHz

Colour: Black

Automation systems

The system can also be integrated with all major home control systems.Ⓜ



POWERED BY



Key features

Power Options: Battery & Mains powered

Suitable for Bay Windows: ✓Ⓜ

Touch and go operation: ✓

Manual operation during power failure: ✓

Noise level at 1000mm (3'): <44dBA

Control Options: Wireless & App Control via RTS or Zigbee 3.0

Home automation systems

MOTOR OPTIONS

⚡ Glydea Ultra 60e



Requires professional installation.

Power Type: Mains

Motor Type: WT • RTS • Zigbee 3.0

🔋 Irismo 45 WF



Requires no pre-wiring.

Power Type: Battery

Control Type: RTS

⚡ Movelite 35



Requires professional installation.

Power Type: Mains

Control Type: WT • RTS

🔋 Movelite 35 WFⓂ



Requires no pre-wiring.

Power Type: Battery

Control Type: RTS

CONTROL OPTIONS

Remote Controls
Situo • Ysia

Single channel & Multi-channel hand held remote control options available.



Protocol: RTS

Channels: 1 • 5

Frequency: 433MHz

Colour Options: White

App Controls
Tahoma

Somfy shading systems can be controlled via Tahoma App or through smart devices.



Protocol: RTS • Zigbee 3.0

Compatibility: Alexa • Google Home

Frequency: 433MHz • 868MHz

Colour Options: White

Automation systems

The system can also be integrated with all major home control systems.Ⓜ



SYSTEM OPTIONS

Systems can be specified with your preferred motor and control system. Choose drives from Lutron, Somfy or Silent Gliss

POWERED BY



Key features

Power Options: Mains powered - 100-250 AC and/or 24 V DC in one motor

Suitable for Bay Windows: ✓

Touch and go operation: ✓

Manual operation during power failure: ✓

Noise level at 1000mm (3'): <36dBA

Control Options: Wireless Remote & App Control

Home automation systems via Silent Gliss Smart

MOTOR OPTIONS

⚡ 9060 Motor



Requires professional installation.

Power Type: Mains AC • DC
Control Type: Main power and/or Dry Contact
Colour Options: White • Silver • Black

⚡ 9060 Motor with 11939 Radio module



Requires professional installation.

Power Type: Mains AC • DC
Control Type: SG Control N and/or Dry Contact
Colour Options: White • Silver • Black

⚡ 9060 Motor with 11270 Smart module



Requires professional installation.

Power Type: Mains
Control Type: Home Automation via SG Smart
Colour Options: White • Silver • Black

CONTROL OPTIONS

Remote Controls 11931 • 11932

Single channel & Multi-channel hand held remote control options available.



Protocol: SG Control N
Channels: 1 • 6
Frequency: 433MHz
Colour Options: White • Black



App Control Move 4.0 11900

9060 Motors are controllable via the Silent Gliss Move® app on smart devices.

Protocol: SG Control N
Frequency: 433MHz • 868MHz
Colour Options: Black



Automation systems Silent Gliss Smart

Silent Gliss 9060 motor integrates with major home control systems via SG Smart.®

Protocol: SG Smart
Communication: Two way



Pictured: ø38mm (1½") ⚡ Pole • Powered by Lutron • Oblique • Flint - Satin



⚡ | ELEVATE

Peerless and opulent, this collection truly has no rival.

A rare, luxurious aesthetic and freedom of expression in design are balanced with the final word in functionality and control.

The world's finest.

Pictured: ø38mm (1½") Coverpole - Lutron • Standard Stud • Matte Brass
Project by: Gallagher London • London SW7 - UK

LEADING MOTOR OPTIONS

Elevate may be specified with motors from the world's leading brands, providing solutions from standalone battery-powered units to complete home automation.



Elevate can be specified with Crestron on request.



For Double pole systems, a hand drawn rear pole may be specified if preferred.



SCALE

Elevate Coverpoles are available in two diameters, Ø38mm (1½”) • 50mm (2”). Finial designs are carefully scaled to maintain the system aesthetic.




DETAILING

The secret of any design is in the detail. Nylon end housings are finished in a complementary colour, for a harmonious tonal effect.




ANY LENGTH

Coverpoles can be supplied to any length[Ⓢ], subject to maximum weight loadings of the selected motorised system.

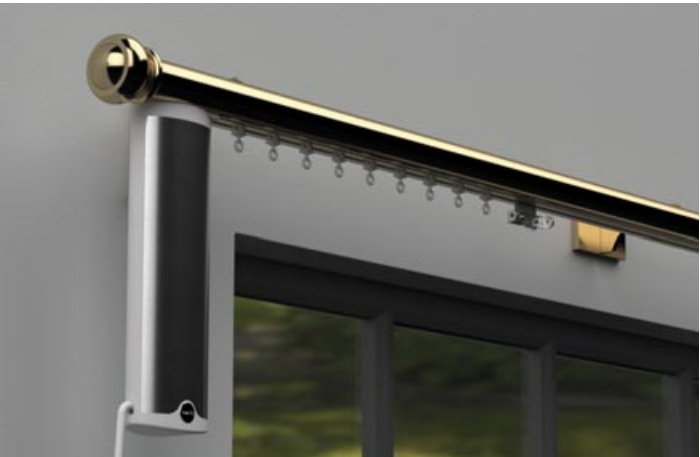

FUNCTION

A range of bracket options has been designed to ensure simple installation, including flush fit ceiling brackets.

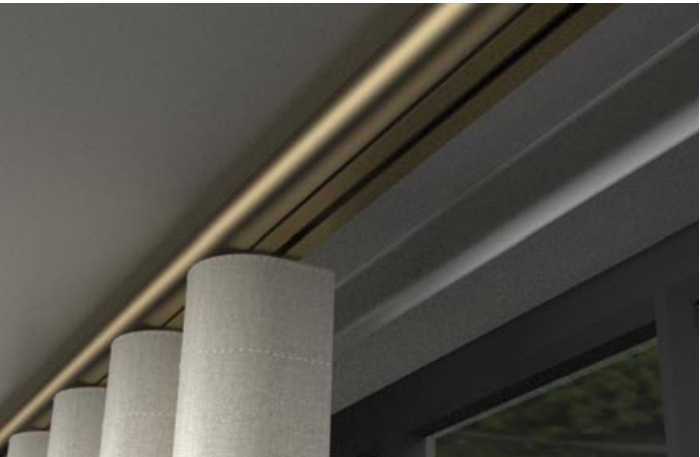

BENT TO SHAPE

A bespoke bay bending service is available on all diameters to allow the perfect shaped pole to fit any bay window.[Ⓢ]



MODERN HEADINGS

The choice of motor systems means that modern headings can be accommodated, with both Wave[®] and Ripplefold[®] styles available.






Pictured: ø38mm (1½") Coverpole - Lutron • Edge Brackets • Mocha Brass

⚡ | ELEVATE

EDGE


Edge is the epitome of understatement, being sleek, discreet and integrated. Available in both metal and wood coverpole options.

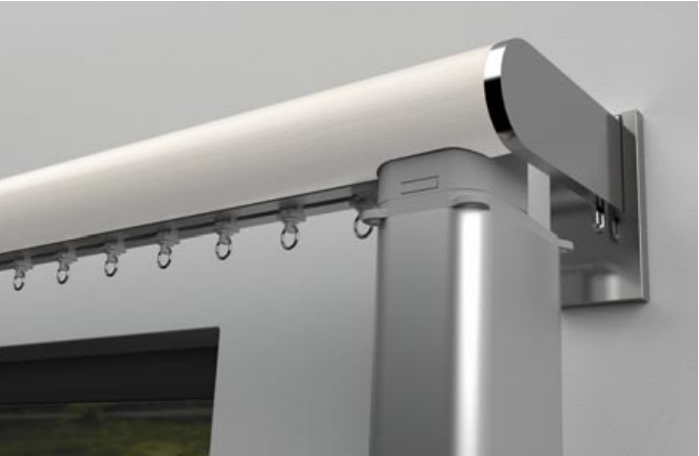

⚡ | ELEVATE

LAYERED SHADING

Double Edge systems are available, allowing layered curtains for privacy and shading control.

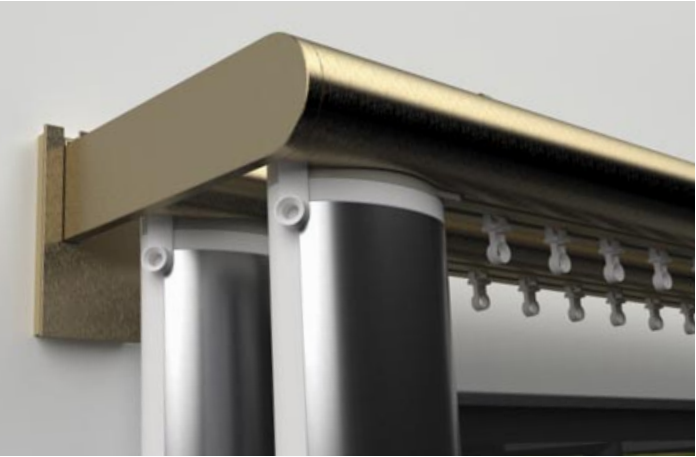

DETAILED TO THE EDGE

The unique Edge bracket design gives a structured return to the wall for curtains and incorporates an adjustable return-to-wall hook eye.



CARBON STEEL

With its dark, lustrous depth, Carbon Steel balances architectural tone with timeless luxury.

304 STAINLESS STEEL

Stainless Steel is known for its strength, purity and enduring appeal. Resistant to corrosion and tarnishing, it ensures lasting performance even in challenging environments.



Pictured: ø38mm (1½”) Coverpole - Somfy • Button Stud • Carbon Steel

Pictured: ø38mm (1½”) Coverpole - Lutron • Faceted Disc • Brushed 304

OIL RUBBED

Deep and dramatic, Oil Rubbed delivers a rich, dark surface, with subtle undertones evoking craftsmanship.

WAXED

Dark finish with a gentle sheen. Waxed steel combines durability with understated refinement.

The soft lustre adds warmth and sophistication to all schemes.

CARBON

Striking in depth, Carbon steel offers a sleek, near-black finish with a contemporary edge.

Minimalist and architectural, it provides a strong design statement.

POLISHED

Highly reflective. Polished 304 Stainless Steel radiates precision and modern luxury.

This finish accentuates clean lines and creates a luminous statement.

MATTE


Matte 304 Stainless Steel softens reflections for a calm, architectural feel.

Its smooth, muted surface makes it a versatile choice across modern interiors.

BRUSHED

Defined by linear texture. Brushed 304 Stainless Steel offers a satin finish that strikes a balance between elegance and practicality.

A timeless finish.

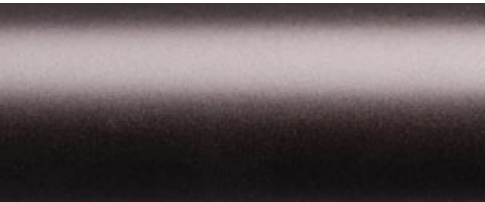

Oil Rubbed Steel



Waxed Steel




Carbon Steel



Polished 304



Matte 304

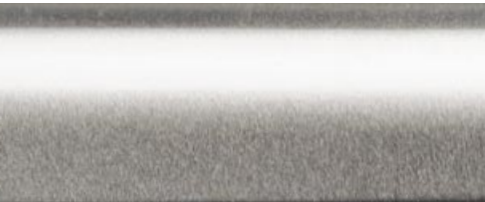

Brushed 304

AUTHENTIC BRASS

Crafted from real, solid brass - a material long associated with heritage, quality and timeless luxury.

Each finish celebrates the natural beauty of brass, from the luminous glow of polished surfaces to the subtle depth of brushed and aged treatments.

Sealed in a clear ceramic coating for durability.




Pictured: ø38mm (1½”) Coverpole - Silent Gliss • Button Stud • Brushed Brass

⚡ ELEVATE

POLISHED BRASS

A timeless, mirror-like finish that radiates luxury. Polished Brass brings a luminous golden tone.

Ideal for interiors that demand refinement and shine.

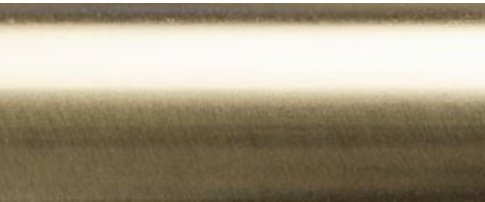

Polished Brass ☉

MATTE BRASS

A contemporary interpretation on brass, with a soft, understated surface that diffuses light beautifully.

Perfect for modern schemes seeking warmth without glare.



Matte Brass ☉

BRUSHED BRASS

The subtle texture of Brushed Brass delivers a sophisticated, tactile finish.

Its satin sheen balances elegance with restraint, making it versatile across styles.



Brushed Brass ☉

AGED BRASS

Rich, mellowed tones that capture the depth and character of time-worn brass.

Aged Brass offers heritage appeal with a luxurious, lived-in quality.



Aged Brass ☉

BRUSHED BRONZE

A darker, brushed brass that exudes strength and warmth.

Brushed Bronze delivers depth and richness, with a soft reflective quality.



Brushed Bronze ☉

MOCHA BRONZE

An indulgent, waxed brass with deep chocolate undertones.

Mocha Bronze offers a refined, modern alternative to traditional dark metals.



Mocha Brass ☉



Pictured: ø50mm (2") Coverpole - Lutron • Walnut | Wooden Contrast Stud • Walnut with Brushed Brass

SOLID WOOD FINISHES

Our solid woods edit celebrates the true character of this organic material.

STAINS


Our curated range of stains enhances the natural beauty of ash, accentuating its grain, while offering distinctive tones from light linen, to the depth of Jet.




Linen ⓘ *Stain over ash*



Honey ⓘ *Stain over ash*

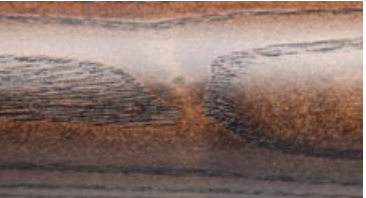

Jacobean ⓘ *Stain over ash*

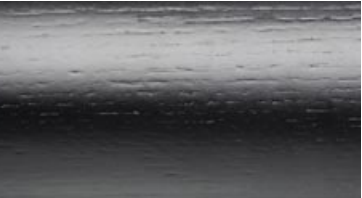

Jet ⓘ *Stain over ash*

NATURALS

When authentic solid wood is required, Naturals celebrates the inherent beauty of Ash, Oak, Cherry & Walnut - each with its own distinctive grain, tone and depth.



Ash ⓘ



Oak ⓘ ⓘ



Cherry ⓘ ⓘ



Walnut ⓘ ⓘ

ⓘ A surcharge will apply | ⓘ Longer lead-times will apply
Due to printing limitations colours in this brochure may not be accurate. Samples are available on request - www.bradleycollection.com/samples/



FINIALS

This design edit provides a versatile solution for any project.

Sharp geometric forms give Elevate a modern persona, while softer rounded details offer a more classic sensibility - reimagined with a contemporary hand.



Flush End Cap® *Supplied as standard*

ø38mm (1½") Inclusive Length 6mm (¼")
ø50mm (2") Inclusive Length 6mm (¼")



Flush Stud *For wooden coverpoles only*

ø50mm (2") Inclusive Length 8mm (⅝")



Contrast Stud

ø38mm (1½") Inclusive Length 20mm (⅞")
ø50mm (2") Inclusive Length 23mm (⅞")



Wooden Contrast Stud

ø50mm (2") Inclusive Length 23mm (⅞")



Faceted Disc

ø38mm (1½") Inclusive Length 45mm (1¾")
ø50mm (2") Inclusive Length 59mm (2⅝")



Wooden Faceted Disc

ø50mm (2") Inclusive Length 59mm (2⅝")



Ball

ø38mm (1½") Inclusive Length 86mm (3⅜")
ø50mm (2") Inclusive Length 106mm (4⅜")



Wooden Ball

ø50mm (2") Inclusive Length 106mm (4⅜")



Button Stud

ø38mm (1½") Inclusive Length 58mm (2⅝")
ø50mm (2") Inclusive Length 69mm (2⅞")



Ball & Collar

ø50mm (2") Inclusive Length 106mm (4⅜")



Wooden Button Stud

ø50mm (2") Inclusive Length 69mm (2⅞")



Wooden Ball & Collar

ø50mm (2") Inclusive Length 106mm (4⅜")



Standard Stud

ø38mm (1½") Inclusive Length 9mm (⅜")
ø50mm (2") Inclusive Length 10mm (⅜")

© Please note that if this option is only available on metal coverpoles. If selected finials cannot be added at a later date.
For full technical information, sizes and weights please download the specification guide - www.bradleycollection.com/downloads/

BRACKET OPTIONS

SINGLE *For straightforward applications.*

Side 		Metal Coverpole Diameter ø38mm (1½") ø50mm (2")	Projection from wall to track centre 100mm (4") 100mm (4")	Fixing plate size w52mm (2⅙") x h104mm (4⅞") w52mm (2⅙") x h104mm (4⅞")
		Wood Coverpole Diameter ø50mm (2")	Projection from wall to track centre 100mm (4")	Fixing plate size w52mm (2⅙") x h104mm (4⅞")
Mid 	Mid - Joining 	Metal Coverpole Diameter ø38mm (1½") ø50mm (2")	Projection from wall to track centre 100mm (4") 100mm (4")	Fixing plate size w104mm (4⅞") x h52mm (2⅙") w104mm (4⅞") x h52mm (2⅙")
		Wood Coverpole Diameter ø50mm (2")	Projection from wall to track centre 100mm (4")	Fixing plate size w104mm (4⅞") x h52mm (2⅙")
Flush 	Flush - Joining 	Metal Coverpole Diameter ø38mm (1½") ø50mm (2")	Drop from ceiling to top of pole 3mm (⅙") 3mm (⅙")	Fixing plate size w70mm (2¾") x h34mm (1⅝") w70mm (2¾") x h34mm (1⅝")
		Wood Coverpole Diameter ø50mm (2")	Projection from wall to track centre 100mm (4")	Fixing plate size w70mm (2¾") x h34mm (1⅝")

DOUBLE *Designed for layered shading.*

Side 		Metal Coverpole Diameter Fø38mm (1½") Bø38mm (1½") Fø38mm (1½") B Uncovered track Fø50mm (2") Bø38mm (1½") Fø50mm (2") Bø50mm (2") Fø50mm (2") B Uncovered track	Projection from wall to track centre F160mm (6⅝") B60mm (2⅜") F160mm (6⅝") B60mm (2⅜") F160mm (6⅝") B60mm (2⅜") F160mm (6⅝") B60mm (2⅜") F160mm (6⅝") B60mm (2⅜")	Fixing plate size w52mm (2⅙") x h104mm (4⅞") w52mm (2⅙") x h104mm (4⅞") w52mm (2⅙") x h104mm (4⅞") w52mm (2⅙") x h104mm (4⅞") w52mm (2⅙") x h104mm (4⅞")
		Wood Coverpole Diameter Fø50mm (2") Bø50mm (2") Fø50mm (2") B Uncovered track	Projection from wall to track centre F160mm (6⅝") B60mm (2⅜") F160mm (6⅝") B60mm (2⅜")	Fixing plate size w52mm (2⅙") x h104mm (4⅞") w52mm (2⅙") x h104mm (4⅞")
Mid 	Mid - Joining 	Metal Coverpole Diameter Fø38mm (1½") Bø38mm (1½") Fø38mm (1½") B Uncovered track Fø50mm (2") Bø38mm (1½") Fø50mm (2") Bø50mm (2") Fø50mm (2") B Uncovered track	Projection from wall to track centre F160mm (6⅝") B60mm (2⅜") F160mm (6⅝") B60mm (2⅜") F160mm (6⅝") B60mm (2⅜") F160mm (6⅝") B60mm (2⅜") F160mm (6⅝") B60mm (2⅜")	Fixing plate size w104mm (4⅞") x h52mm (2⅙") w104mm (4⅞") x h52mm (2⅙") w104mm (4⅞") x h52mm (2⅙") w104mm (4⅞") x h52mm (2⅙") w104mm (4⅞") x h52mm (2⅙")
		Wood Coverpole Diameter Fø50mm (2") Bø50mm (2") Fø50mm (2") B Uncovered track	Projection from wall to track centre F160mm (6⅝") B60mm (2⅜") F160mm (6⅝") B60mm (2⅜")	Fixing plate size w104mm (4⅞") x h52mm (2⅙") w104mm (4⅞") x h52mm (2⅙")

EDGE *A modern interpretation of French returns.*

Single - End 		Metal Coverpole Diameter ø38mm (1½") ø50mm (2")	Projection from wall to track centre 100mm (4") 100mm (4")	Fixing plate size w52mm (2⅙") x h104mm (4⅞") w52mm (2⅙") x h104mm (4⅞")
		Wood Coverpole Diameter ø50mm (2")	Projection from wall to track centre 100mm (4")	Fixing plate size w52mm (2⅙") x h104mm (4⅞")
Double - End 		Diameter Fø38mm (1½") Bø38mm (1½") Fø50mm (2") Bø38mm (1½") Fø50mm (2") Bø50mm (2")	Projection from wall to pole centre F160mm (6⅝") B60mm (2⅜") F160mm (6⅝") B60mm (2⅜") F160mm (6⅝") B60mm (2⅜")	Fixing plate size w52mm (2⅙") x h104mm (4⅞") w52mm (2⅙") x h104mm (4⅞") w52mm (2⅙") x h104mm (4⅞")
		Wood Coverpole Diameter Fø50mm (2") Bø50mm (2")	Projection from wall to track centre F160mm (6⅝") B60mm (2⅜")	Fixing plate size w52mm (2⅙") x h104mm (4⅞")

CUSTOM BRACKETS *Designed to suit any window.*

Custom Projection 	Custom Fixing Plate 	Uplift 	Ceiling Brackets 	Angled Brackets 
<i>Specify the exact projection needed.</i>	<i>Relevant where space is restricted or weight is a concern.</i>	<i>Helps negotiate cornice & similar architectural features.</i>	<i>Specify exact drop required from ceiling.</i>	<i>The solution for tight and awkward locations.</i>



Handed Item - Left and Right version available
Custom Brackets shown are for illustration purposes. Brackets are designed on a project basis to specific requirements.

POWERED BY



Key features

Power Options: Mains powered

Maximum length: 12 Metres (39ft)Ⓢ

Suitable for Bay Windows: ✓Ⓢ

Header types: Standard, S-Fold and Ripplefold®

Motor Position: In-line or perpendicular to pole

Manual operation during power failure: ✓

Noise level at 1000mm (3'): <44dBA

Control Options: Lutron® QS Home Wireless Remote & App Control Home automation systems

MOTOR OPTIONS

⚡ D105



Requires professional installation.

Power Type: Mains power

Control Type: Wired or Remote via Radio dongle

Maximum length: 9M (29.6ft).

Maximum weight load: 48kg (105lb).⚠

Colour: White

⚡ D145



Requires professional installation.

Power Type: Mains power

Control Type: Wired or Remote via Radio dongle

Maximum length: 9M (29.6ft).

Maximum weight load: 66kg (145lb).⚠

Colour: White

⚡ D175



Requires professional installation.

Power Type: Mains power

Control Type: Wired or Remote via Radio dongle

Maximum length: 12M (39ft).

Maximum weight load: 79kg (175lb).⚠

Colour: White

CONTROL OPTIONS

Remote Controls
Pico

Single channel hand held remote control options available.



Protocol: Sivoia QS wireless system

Channels: 1

Frequency: 433MHz

Colour: White

App Controls
RA2 Select Hub

Lutron shading systems can be controlled via Lutron App or through smart devices.



Protocol: Sivoia QS wireless system

Compatibility: Alexa • Google Home

Frequency: 433MHz • 868MHz

Colour: Black

Automation systems

The system can also be integrated with all major home control systems.Ⓢ



GLIDING OPTIONS

Rollers




For standard headings.

DropⓈ: 12mm (7⁄16")

Colour: White

S-Fold Rollers




For use with wave-style tape.

DropⓈ: 15mm (5⁄16")

S-Fold Pitch: 60mm (2³⁄8") • 80mm (3¹⁄8")

Colour: White

Ripplefold® Rollers



For use with Graber or Kirsch snap tape.

DropⓈ: 16mm (5⁄8")

Ripplefold® Fullness: 80% • 100% • 120%

Colour: White

Ⓢ Glider/Roller drop from bottom of profile to bottom of eyelet • Ripplefold drop from bottom of profile to centre of eyelet.

COVERPOLE

Poles are cut and bent to suit individual requirements. When calculating the length of your pole, remember to allow tolerance beyond the width of the frame for the curtains to stack back to the edge of the window.

Poles exceeding the maximum length will be cut into equal parts unless otherwise specified. A joining bracket will need to be specified.



Size	Maximum distance between brackets	Maximum length in one piece	Standard Bend radius
ø38mm (1½") Steel • Stainless • Brass	1500mm (60")	2900mm (114")Ⓢ	R275mm (10¹³⁄₁₆")Ⓢ
ø50mm (2") Steel • Stainless • Brass	1500mm (60")	2900mm (114")Ⓢ	R275mm (10¹³⁄₁₆")Ⓢ
ø50mm (2") Wood	1500mm (60")	2400mm (94 ½")	R275mm (10¹³⁄₁₆")

Ⓢ Supplied in sections - maximum section length UK - 2900mm (114³⁄₁₆") • Rest of World 2540mm (100") | Ⓢ 304 Stainless Steel finishes not available with bends

POWERED BY

somfy®

Key features

Power Options: Battery & Mains powered

Maximum length: 12 Metres (39ft)Ⓢ

Suitable for Bay Windows: ✓ⓈⓈ

Header types: Standard, Ripple and Ripplefold®

Touch and go operation: ✓

Manual operation during power failure: ✓

Noise level at 1000mm (3'): <44dBA

Control Options: Wireless & App Control via RTS or Zigbee 3.0 Home automation systems

MOTOR OPTIONS

⚡ Glydea Ultra 60e



Requires professional installation.

Power Type: Mains

Motor Type: WT • RTS • Zigbee 3.0

Maximum length: 12M (39ft).

Maximum weight load: 60kg (132lb).⚠

🔋 Irismo 45 WF



Requires no pre-wiring.

Power Type: Battery

Control Type: RTS

Maximum length: 10M (33ft).

Maximum weight load: 45kg (99lb).⚠

⚡ Movelite 35



Requires professional installation.

Power Type: Mains

Control Type: WT • RTS

Maximum length: 10M (33ft).

Maximum weight load: 35kg (77lb).⚠

🔋 Movelite 35 WFⓈ



Requires no pre-wiring.

Power Type: Battery

Control Type: RTS

Maximum length: 6M (19ft).

Maximum weight load: 35kg (77lb).⚠

CONTROL OPTIONS

Remote Controls

Situo • Ysia

Single channel & Multi-channel hand held remote control options available.



Protocol: RTS

Channels: 1 • 5

Frequency: 433MHz

Colour Options: White

App Controls

Tahoma

Somfy shading systems can be controlled via Tahoma App or through smart devices.



Protocol: RTS • Zigbee 3.0

Compatibility: Alexa • Google Home

Frequency: 433MHz • 868MHz

Colour Options: White

Automation systems

The system can also be integrated with all major home control systems.Ⓢ



GLIDING OPTIONS

Rollers




For standard headings.

DropⓈ: 20mm (13⁄16")

Colour Options: White • Black

Ripple Rollers

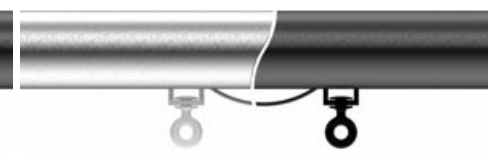


For use with wave-style tape.

DropⓈ: 20mm (13⁄16")

Ripple Pitch: 80mm (31⁄8")

Colour Options: White

Ripplefold® Rollers

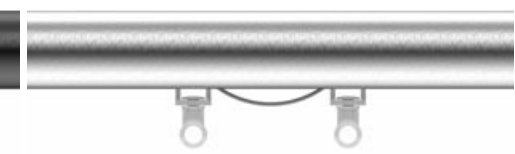

For use with Graber or Kirsch snap tape.

DropⓈ: 18mm (11⁄16")

Ripplefold® Fullness: 80% • 100% • 120%


Colour Options: White

Ⓢ Glider/Roller drop from bottom of profile to bottom of eyelet • Ripplefold drop from bottom of profile to centre of eyelet.

COVERPOLE

Poles are cut and bent to suit individual requirements. When calculating the length of your pole, remember to allow tolerance beyond the width of the frame for the curtains to stack back to the edge of the window.

Poles exceeding the maximum length will be cut into equal parts unless otherwise specified. A joining bracket will need to be specified.

				
Size	Maximum distance between brackets		Maximum length in one piece	Standard Bend radius
ø38mm (1½") Steel • Stainless • Brass	1500mm (60")		2900mm (114")⊗	R275mm (10⅜")⊗
ø50mm (2") Steel • Stainless • Brass	1500mm (60")		2900mm (114")⊗	R275mm (10⅜")⊗
ø50mm (2") Wood	1500mm (60")		2400mm (94 ½")	R275mm (10⅜")

Ⓢ Supplied in sections - maximum section length UK - 2900mm (114³⁄₁₆") • Rest of World 2540mm (100") | Ⓢ 304 Stainless Steel finishes not available with bends

POWERED BY



Key features

Power Options: Mains powered - 100-250 AC and/or 24 V DC in one motor

Maximum length: 25 Metres (82ft) [Ⓢ]

Suitable for Bay Windows:  

Header types: Standard & Wave[®]

Motor Position: In-line or perpendicular to pole

Touch and go operation: 

Manual operation during power failure: 

Noise level at 1000mm (3'): <36dBA

Control Options: Wireless Remote & App Control

Home automation systems via Silent Gliss Smart

MOTOR OPTIONS

⚡ 9060 Motor



Requires professional installation.

Power Type: Mains AC • DC
Control Type: Main power and/or Dry Contact
Maximum length: 25M (82ft).
Maximum weight load: 65kg (143lb). 
Colour Options: White • Silver • Black

⚡ 9060 Motor with 11939 Radio module



Requires professional installation.

Power Type: Mains AC • DC
Control Type: SG Control N and/or Dry Contact
Maximum length: 25M (82ft).
Maximum weight load: 65kg (143lb). 
Colour Options: White • Silver • Black

⚡ 9060 Motor with 11270 Smart module



Requires professional installation.

Power Type: Mains
Control Type: Home Automation via SG Smart
Maximum length: 25M (82ft).
Maximum weight load: 65kg (143lb). 
Colour Options: White • Silver • Black

CONTROL OPTIONS

Remote Controls
11931 • 11932

Single channel & Multi-channel hand held remote control options available.



Protocol: SG Control N
Channels: 1 • 6
Frequency: 433MHz
Colour Options: White • Black

App Control
Move 4.0 11900

9060 Motors are controllable via the Silent Gliss Move[®] app on smart devices.



Protocol: SG Control N
Frequency: 433MHz • 868MHz
Colour Options: Black

Automation systems
Silent Gliss Smart

Silent Gliss 9060 motor integrates with major home control systems via SG Smart.^{ⓈⓈ}



Protocol: SG Smart
Communication: Two way

GLIDING OPTIONS

Gliders



For standard headings.

Drop[Ⓢ]: 20mm (1³/₈"")
Colour Options: White

2C Rollers[Ⓢ]



For standard headings.

Drop[Ⓢ]: 20mm (1³/₈"")
Colour Options: White • Black

Wave[®] Gliders



For use with wave-style tape.

Drop[Ⓢ]: 20mm (1³/₈"")
Wave Pitch: 60mm (2³/₈"") • 80mm (3¹/₈"")
Colour Options: White

Wave[®] 2C Rollers[Ⓢ]



For use with wave-style tape.


Drop[Ⓢ]: 20mm (1³/₈"")
Wave Pitch: 60mm (2³/₈"") • 80mm (3¹/₈"")
Colour Options: White • Black

[Ⓢ] Glider/Roller drop from bottom of profile to bottom of eyelet.

COVERPOLE

Poles are cut and bent to suit individual requirements. When calculating the length of your pole, remember to allow tolerance beyond the width of the frame for the curtains to stack back to the edge of the window.

Poles exceeding the maximum length will be cut into equal parts unless otherwise specified. A joining bracket will need to be specified.

			
Size	Maximum distance between brackets	Maximum length in one piece	Standard Bend radius
ø38mm (1½") Steel • Stainless • Brass	1500mm (60")	2900mm (114")⊗	R275mm (10⅜")⊗
ø50mm (2") Steel • Stainless • Brass	1500mm (60")	2900mm (114")⊗	R275mm (10⅜")⊗
ø50mm (2") Wood	1500mm (60")	2400mm (94 ½")	R275mm (10⅜")

[Ⓢ] Supplied in sections - maximum section length UK - 2900mm (114³/₁₆") • Rest of World 2540mm (100") | [Ⓢ] 304 Stainless Steel finishes not available with bends
[Ⓢ] Supplied as standard on systems over maximum shipping lengths above.



⚡ | LINEAR(2)

Linear 2 transforms an electric track into an architectural feature. The integrated metal cartridge works with engineered motor adaptors, with brackets finished to match for a coordinated finish.

Smart tech meets sharp design.

Pictured: #27mm (1½") Linear • Powered by Lutron • Raven - Satin

LEADING MOTOR OPTIONS

Linear may be specified with your choice of motors from the leading brands. This provides power and control options ranging from standalone battery powered systems to fully integrated home automation solutions.




METALCOAT DETAILING

The innovative, embedded cartridge is paired with precision engineered metal adaptors finished to match the system. Allowing a single or a twin drive which sit discreetly behind the curtain.



GLIDING

Gypsum and Anthracite colours offered as standard for gliders. Metalcoat rollers and Metalcoat Ripplefold rollers available for exact colour match. A low-friction channel coating ensures quieter performance.

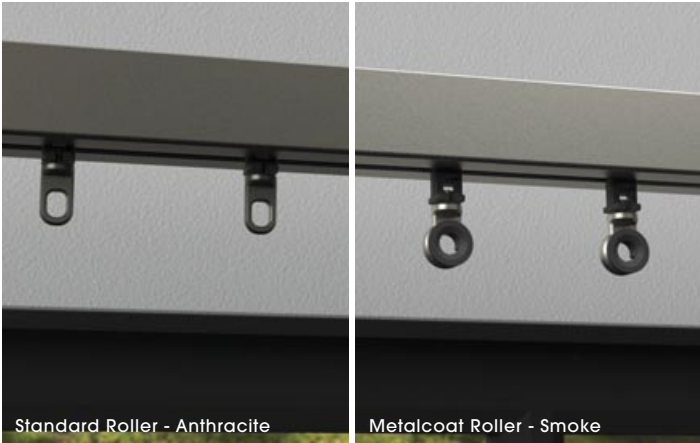

MODERN HEADINGS

The choice of motor systems means that modern headings can be accommodated, with both Wave® and Ripplefold® styles available.




FUNCTION

Wall fixed brackets may be specified in a matching track finish, incorporating magnetic cover plates.



TRUE FLUSH

The direct fix ceiling brackets provide truly flush ceiling mounting.

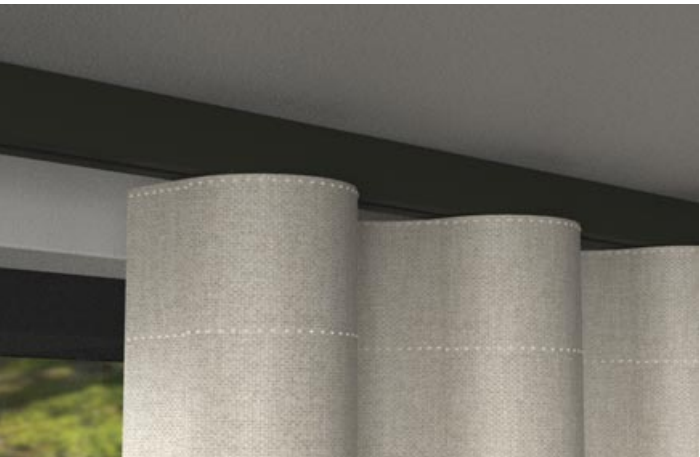

LAYERED SHADING

Tracks can be supplied to any length[Ⓜ], subject to maximum weight loadings of the selected motorised system.



BENT TO SHAPE


A bespoke bay bending and curving service is available on all systems to allow the perfect shaped track to fit any bay window.



FINISHES

All tracks and components may be specified in this stunning palette of colours and finishes, with a choice of coat options throughout.


COAT OPTIONS

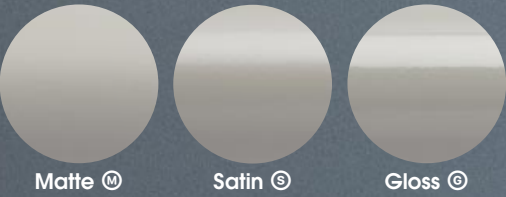

Matte Satin Gloss


METALLICS

High metallic fleck coatings.
Available in Satin and Gloss sheen levels.

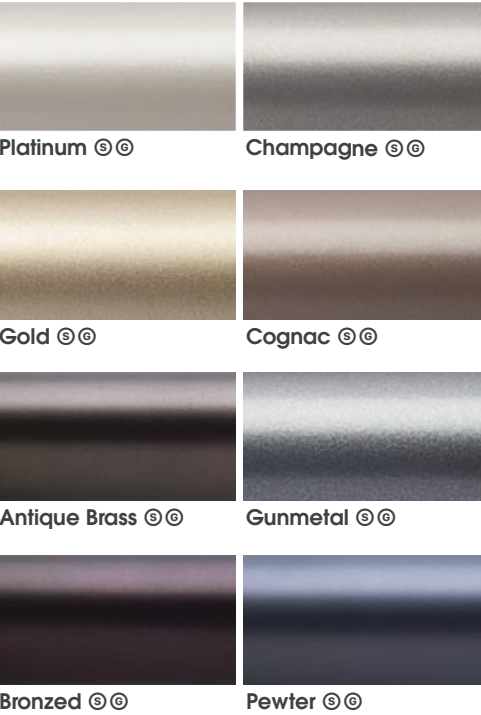


SHADES

A superb selection of opaque colours,
all available in a choice of Matte, Satin or Gloss finish.

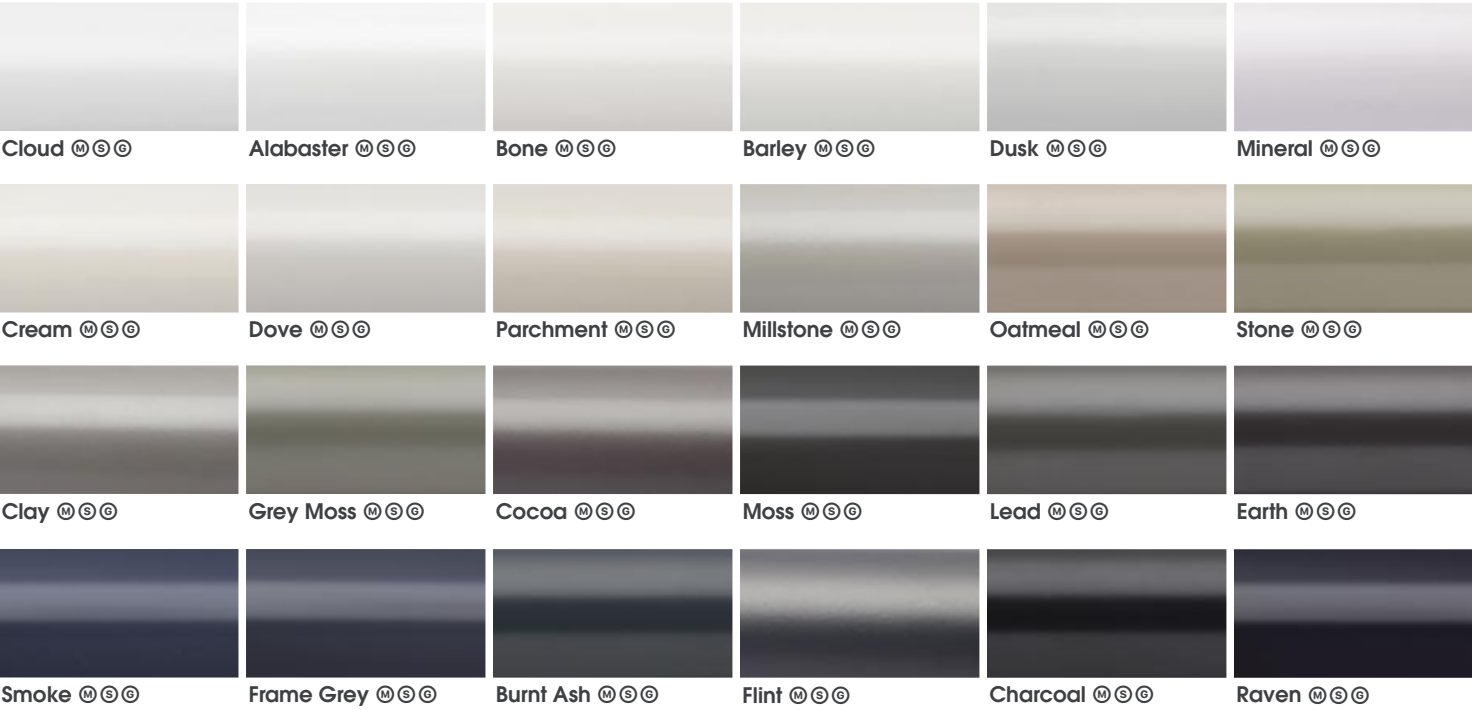

ANODICS

A flat metal colour group, with an anodised style.

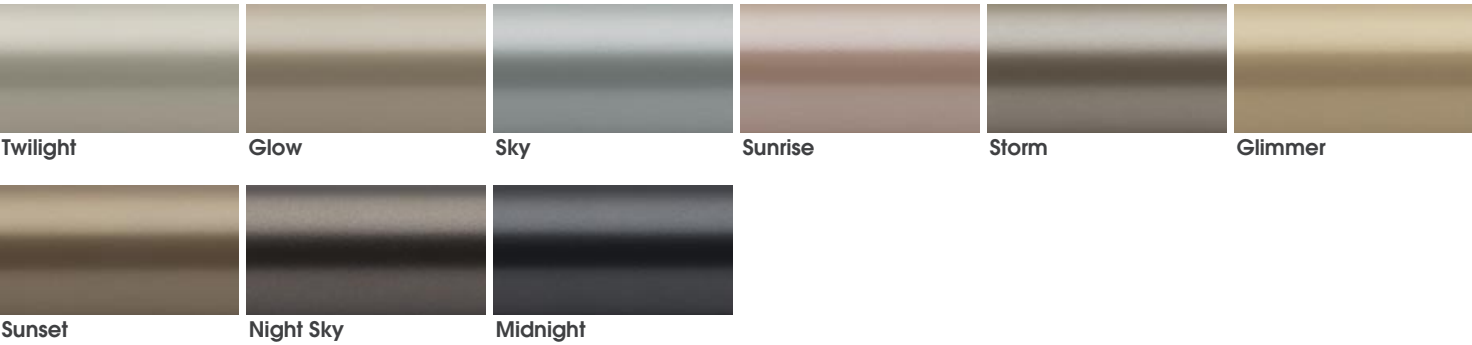

Pictured: #27mm (1 1/8") Linear • Powered by Lutron • Raven - Satin



Pictured: #27mm (1 1/8") Linear • Powered by Somfy • Copper

CERAMICS

CERAKOTE®

Finished with ceramic Cerakote for industry leading protection and a flawless finish that endures daily life.

		
Frost ⊕	Titanium ⊕	Tungsten ⊕
		
Electrum ⊕	Golden Quartz ⊕	Burnt Bronze ⊕
		
Midnight Bronze ⊕	Serpentine ⊕	Blue Titanium ⊕
		
Copper ⊕	Cobalt ⊕	Graphite Black ⊕


⊕ A finishing charge will apply

BRACKET OPTIONS

SINGLE *For straightforward applications.*

Side	Mid	Projection from wall to track centre	Side Fixing plate size	Mid Fixing plate size
		100mm (4")	w40mm (1½") x H75mm (2½½")	w40mm (1½") x H36mm (1½")

Flush Ceiling Kit *For direct ceiling fitting.*



Drop from ceiling to top of track
0mm (0")

RECESS *Designed for rebates.*

Recess *With hook stop*



Depth off wall
14mm (½")

Fixing plate size
w42mm (1½") x H27mm (1½")

ADJUSTABLE *Designed to give flexibility during installation.*

Side	Mid	Projection from wall to track centre	Side Fixing plate size	Mid Fixing plate size
		Min.80mm (3½") Max.130mm (5½")	w47mm (1½") x H75mm (2½½")	w47mm (1½") x H36mm (1½")

DOUBLE *Designed for layered shading.*

Side	Mid	Projection from wall to track centre	Side Fixing plate size	Mid Fixing plate size
		£140mm (5½") B 40-60mm (1½-2½½")	w47mm (1½") x H75mm (2½½")	w47mm (1½") x H36mm (1½")

CUSTOM BRACKETS *Designed to suit any window. ⚙*

Custom Projection	Custom Fixing Plate	Uplift	Ceiling Brackets	Angled Brackets
				
Specify the exact projection needed.	Relevant where space is restricted or weight is a concern.	Helps negotiate cornice & similar architectural features.	Specify exact drop required from ceiling.	The solution for tight and awkward locations.

⚙ Custom brackets shown are for illustration purposes. Brackets are designed on a project basis to specific requirements

GLIDING OPTIONS

Glider	Roller	Metalcoat Roller®
		
For standard headings. DropⓈ: 20mm (¾") Colour Options: Gypsum • Anthracite	For standard headings. DropⓈ: 20mm (¾") Colour Options: Gypsum • Anthracite	For standard headings. DropⓈ: 20mm (¾") Colour Options: System Colour Ⓢ

Sine Glider	Sine Roller	Metalcoat Sine Roller®	Metalcoat Ripplefold Roller®
			
For use with wave-style tape. DropⓈ: 20mm (¾") Sine Pitch: 80mm (3½") Colour Options: Gypsum • Anthracite	For use with wave-style tape. DropⓈ: 20mm (¾") Sine Pitch: 60mm (2½") • 80mm (3½") Colour Options: System ColourⓈ	For use with wave-style tape. DropⓈ: 20mm (¾") Sine Pitch: 60mm (2½") • 80mm (3½") Colour Options: System ColourⓈ	For use with snap tape. DropⓈ: 20mm (¾") Ripplefold® Fullness: 80% • 100% Colour Options: System ColourⓈ

Ⓢ Glider/Roller drop from bottom of profile to bottom of eyelet • Ripplefold drop from bottom of profile to centre of eyelet.

BESPOKE TRACKS

Tracks are cut, bent and curved to suit individual requirements. When calculating the length of your track, remember to allow tolerance beyond the width of the frame for the curtains to stack back to the edge of the window.

Tracks exceeding the maximum length will be cut into equal parts unless otherwise specified. A track joiner will be supplied.



Size	Maximum distance between brackets	Maximum length in one piece	Standard Bend radius
H27mm (1½") W32mm (1¼")	1000mm (39")	4000mm (157")Ⓢ	R275mm (10 13/16")

Double Linear systems may be specified with a motor to front and rear. It is also possible to specify a motor to the main curtain and a manual track to the rear.

Ⓢ Metalcoat Gliders, supplied in satin finish on Matte & Gloss finished systems
For finish colour coordination see the specification guide www.bradleycollection.com/downloads/

SYSTEM OPTIONS

Systems can be specified with your preferred motor and control system. Choose drives from Lutron, Somfy or Silent Gliss

POWERED BY



Key features

Power Options: Mains powered

Suitable for Bay Windows: ✓

Touch and go operation: ✗

Manual operation during power failure: ✓

Noise level at 1000mm (3'): <44dBA

Control Options: Lutron® QS Home Wireless Remote & App Control

Home automation systems

MOTOR OPTIONS

⚡ D105



Requires professional installation.

Power Type: Mains power
Control Type: Wired or Remote via Radio dongle
Colour: White

⚡ D145



Requires professional installation.

Power Type: Mains power
Control Type: Wired or Remote via Radio dongle
Colour: White

⚡ D175



Requires professional installation.

Power Type: Mains power
Control Type: Wired or Remote via Radio dongle
Colour: White

CONTROL OPTIONS

Remote Controls
Pico

Single channel hand held remote control options available.



Protocol: Sivoia QS wireless system
Channels: 1
Frequency: 433MHz
Colour: White

App Controls
RA2 Select Hub

Lutron shading systems can be controlled via Lutron App or through smart devices.



Protocol: Sivoia QS wireless system
Compatibility: Alexa • Google Home
Frequency: 433MHz • 868MHz
Colour: Black

Automation systems

The system can also be integrated with all major home control systems.Ⓜ



POWERED BY



Key features

Power Options: Battery & Mains powered

Suitable for Bay Windows: ✓Ⓜ

Touch and go operation: ✓

Manual operation during power failure: ✓

Noise level at 1000mm (3'): <44dBA

Control Options: Wireless & App Control via RTS or Zigbee 3.0

Home automation systems

MOTOR OPTIONS

⚡ Glydea Ultra 60e



Requires professional installation.

Power Type: Mains
Motor Type: WT • RTS • Zigbee 3.0

🔋 Irismo 45 WF



Requires no pre-wiring.

Power Type: Battery
Control Type: RTS

⚡ Movelite 35



Requires professional installation.

Power Type: Mains
Control Type: WT • RTS

🔋 Movelite 35 WFⓂ



Requires no pre-wiring.

Power Type: Battery
Control Type: RTS

CONTROL OPTIONS

Remote Controls
Situo • Ysia

Single channel & Multi-channel hand held remote control options available.



Protocol: RTS
Channels: 1 • 5
Frequency: 433MHz
Colour Options: White



Protocol: Zigbee 3.0
Channels: 1 • 5
Frequency: 433MHz
Colour Options: White



Protocol: RTS • Zigbee 3.0
Compatibility: Alexa • Google Home
Frequency: 433MHz • 868MHz
Colour Options: White

Automation systems

The system can also be integrated with all major home control systems.Ⓜ



SYSTEM OPTIONS

Systems can be specified with your preferred motor and control system. Choose drives from Lutron, Somfy or Silent Gliss

POWERED BY



Key features

Power Options: Mains powered - 100-250 AC and/or 24 V DC in one motor

Suitable for Bay Windows: ✓

Touch and go operation: ✓

Manual operation during power failure: ✓

Noise level at 1000mm (3'): <36dBA

Control Options: Wireless Remote & App Control

Home automation systems via Silent Gliss Smart

MOTOR OPTIONS

⚡ 9060 Motor



Requires professional installation.

Power Type: Mains AC • DC
Control Type: Main power and/or Dry Contact
Colour Options: White • Silver • Black

⚡ 9060 Motor with 11939 Radio module



Requires professional installation.

Power Type: Mains AC • DC
Control Type: SG Control N and/or Dry Contact
Colour Options: White • Silver • Black

⚡ 9060 Motor with 11270 Smart module



Requires professional installation.

Power Type: Mains
Control Type: Home Automation via SG Smart
Colour Options: White • Silver • Black

CONTROL OPTIONS

Remote Controls 11931 • 11932

Single channel & Multi-channel hand held remote control options available.



Protocol: SG Control N
Channels: 1 • 6
Frequency: 433MHz
Colour Options: White • Black

App Control Move 4.0 11900

9060 Motors are controllable via the Silent Gliss Move® app on smart devices.



Protocol: SG Control N
Frequency: 433MHz • 868MHz
Colour Options: Black

Automation systems Silent Gliss Smart

Silent Gliss 9060 motor integrates with major home control systems via SG Smart.®®



Protocol: SG Smart
Communication: Two way



Pictured: #27mm (1 1/8") Linear • Powered by Lutron • Raven - Satin



FLOAT

A modern take of the classic pole and ring, uniting perfect passing functionality with contemporary style.

Rings pass smoothly over discreet brackets and integrated ends create a seamless, refined look


Modern design. Flawless ring movement

Pictured: ø38mm (1½") Pole • Seamless • Charcoal - Satin

FLOAT

FLOATING RING

Coated rings work in tandem with a refined gliding system, producing smooth operation and a consistent, uniform appearance when curtains are drawn.

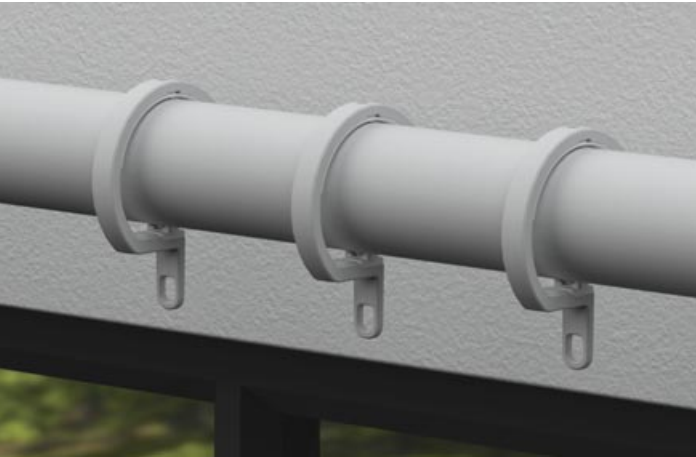


SMOOTH RUNNING

The unique Float ring features a polymer roller, ensuring smooth operation across joins and longer spans.



PERFECTED PASSING

Rings secured into the pole profile glide smoothly over brackets, perfect for long spans and the most challenging bays.

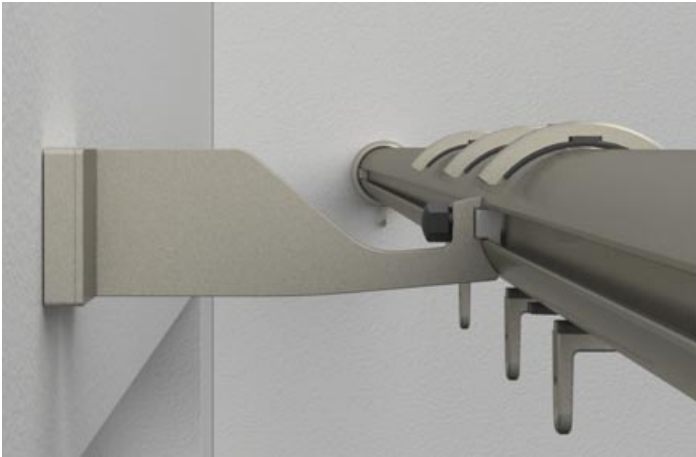


MODERN HEADINGS

Modern sinuous heading styles can be created with rings, using both hook and tape components.




DISCREET BRACKETS

The bracket architecture keeps the front face of the pole clear of visible parts

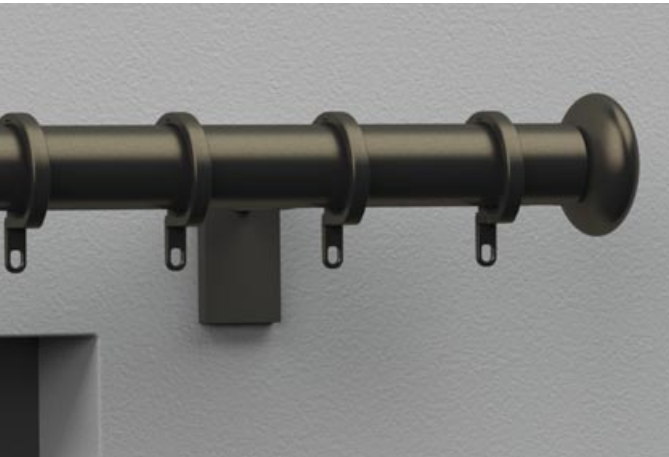


PRECISE JOINING

Innovative jointing ensures seamless, precision alignment between pole sections

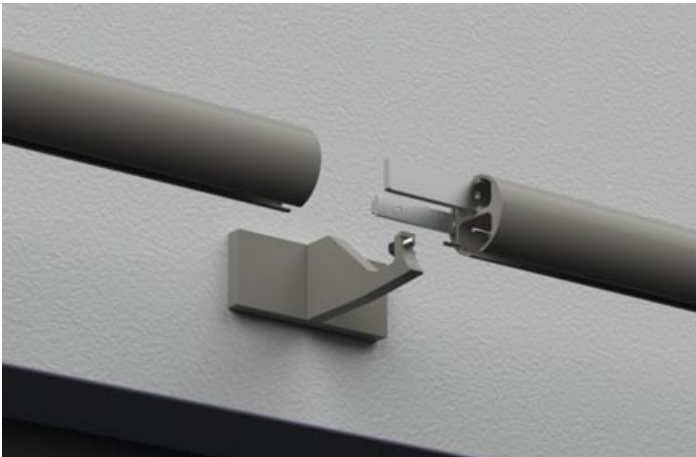

CEILING SKIMMING RINGS

Innovative ceiling brackets allow rings to glide nearly flush and a partition bracket adds versatility for a room divide.

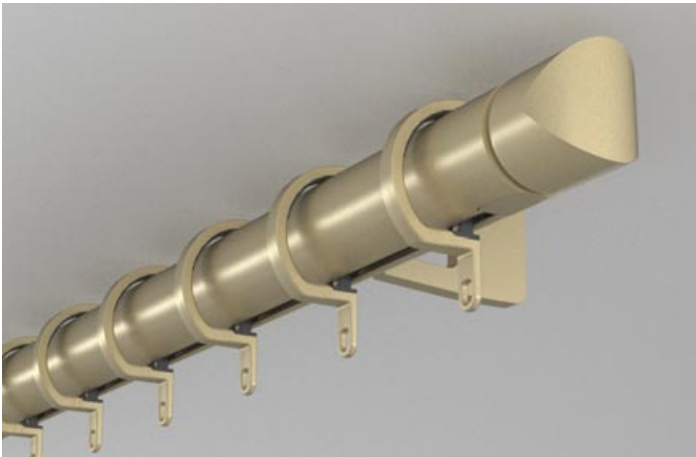

BENT TO SHAPE

Float profile can be accurately bent and curved to shape, with optional adjustable brackets, delivering installation flexibility.




FINISHES

Float presents a striking palette of finishes, complemented by refined coating options to suit any interior scheme

SHADES

A superb selection of opaque colours, all available in a choice of Matte, Satin or Gloss finish.




					
Cloud	Alabaster	Bone	Barley	Dusk	Mineral
					
Cream	Dove	Parchment	Millstone	Oatmeal	Stone
					
Clay	Grey Moss	Cocoa	Moss	Lead	Earth
					
Smoke	Frame Grey	Burnt Ash	Flint	Charcoal	Raven

COAT OPTIONS



METALLICS

High metallic fleck coatings. Available in Satin and Gloss sheen levels.

		
Platinum	Champagne	Gold
		
Cognac	Antique Brass	Gunmetal
		
Bronzed	Pewter	

ANODICS

A flat metal colour group, with an anodised style.

		
Twilight	Glow	Sky
		
Sunrise	Storm	Glimmer
		
Sunset	Night Sky	Midnight

Pictured left to right:
ø30mm (1 3/16") Pole • Tulip • Champagne - Satin
ø30mm (1 3/16") Pole • Orbic Grand • Platinum - Satin
ø30mm (1 3/16") Pole • Ellipse • Antique Brass - Satin
ø38mm (1 1/2") Pole • Oblique • Gold - Satin
ø38mm (1 1/2") Pole • Drum • Bronze - Satin



Pictured top to bottom:
 ø30mm (1 3/16") Pole | Orbic • Bone - Matte | Seamless • Parchment - Matte
 Oblique • Oatmeal - Matte | Planar • Flint - Matte | Spheric • Raven - Matte

FINIALS

Float’s integrated ends embody modern minimalism. Standard seamless end caps deliver a clean finish, with optional geometric finials for added decorative detail.



Seamless® *Supplied as standard*
 ø30mm (1 3/16") Inclusive Length 5mm (3/16")
 ø38mm (1 1/2") Inclusive Length 5mm (3/16")



Orbic®
 ø30mm (1 3/16") Inclusive Length 13mm (1/2")
 ø38mm (1 1/2") Inclusive Length 15mm (9/16")



Orbic Grand
 ø30mm (1 3/16") Inclusive Length 13mm (1/2")
 ø38mm (1 1/2") Inclusive Length 15mm (9/16")



Drum
 ø30mm (1 3/16") Inclusive Length 21mm (13/16")
 ø38mm (1 1/2") Inclusive Length 23mm (7/8")



Tulip
 ø30mm (1 3/16") Inclusive Length 35mm (1 3/8")
 ø38mm (1 1/2") Inclusive Length 43mm (1 7/8")



Oblique
 ø30mm (1 3/16") Inclusive Length 21mm (13/16")
 ø38mm (1 1/2") Inclusive Length 23mm (7/8")



Planar
 ø30mm (1 3/16") Inclusive Length 25mm (1")
 ø38mm (1 1/2") Inclusive Length 29mm (1 1/8")



Ellipse
 ø30mm (1 3/16") Inclusive Length 29mm (1 1/8")
 ø38mm (1 1/2") Inclusive Length 33mm (1 3/8")



Spheric
 ø30mm (1 3/16") Inclusive Length 53mm (2 1/16")
 ø38mm (1 1/2") Inclusive Length 65mm (2 5/8")

© Please note that if this option is selected finials cannot be added at a later date. | 🌀 Removable version available on request, Pole is supplied without seamless option or access ports. For full technical information, sizes and weights please download the specification guide - www.bradleycollection.com/downloads/

BRACKET OPTIONS

SINGLE *For straightforward applications.*

Side 	Diameter ø30mm (1⅜") ø38mm (1½")	Projection from wall to pole centre 60mm (2⅝") • 100mm (4") 100mm (4")	Fixing plate size w30mm (1⅜") x h70mm (2¾") w38mm (1½") x h89mm (3½")
Mid 	Diameter ø30mm (1⅜") ø38mm (1½")	Projection from wall to pole centre 60mm (2⅝") • 100mm (4") 100mm (4")	Fixing plate size w70mm (2¾") x h30mm (1⅜") w89mm (3½") x h38mm (1½")
Ceiling 	Diameter ø30mm (1⅜") ø38mm (1½")	Drop from ceiling to top of pole 7mm (¼") 7mm (¼")	Fixing plate size w70mm (2¾") x h30mm (1⅜") w70mm (2¾") x h30mm (1⅜")

RECESS *Designed for rebates.*

Recess <i>With hook stop</i> 	Diameter ø30mm (1⅜") ø38mm (1½")	Depth off wall 10mm (⅜") 10mm (⅜")	Fixing plate size ø38mm (1½") ø48mm (1⅞")
---	--	--	---

ADJUSTABLE *Designed to give flexibility during installation.*

Side 	Diameter ø30mm (1⅜") ø38mm (1½")	Projection from wall to pole centre Min.90mm (3⅝") Max.110mm (4⅝") Min.90mm (3⅝") Max.110mm (4⅝")	Fixing plate size w38mm (1½") x h70mm (2¾") w46mm (1⅞") x h89mm (3½")
Mid 	Diameter ø30mm (1⅜") ø38mm (1½")	Projection from wall to pole centre Min.90mm (3⅝") Max.110mm (4⅝") Min.90mm (3⅝") Max.110mm (4⅝")	Fixing plate size w70mm (2¾") x h30mm (1⅜") w89mm (3½") x h38mm (1½")

DOUBLE *Designed for layered shading.*


Side 	Diameter Fø30mm (1⅜") Bø30mm (1⅜") Fø38mm (1½") Bø30mm (1⅜") Fø38mm (1½") Bø38mm (1½")	Projection from wall to pole centre F160mm (6⅝") B60mm (2⅝") F160mm (6⅝") B60mm (2⅝") F160mm (6⅝") B60mm (2⅝")	Fixing plate size w57mm (2¼") x h114mm (4½") w57mm (2¼") x h114mm (4½") w57mm (2¼") x h114mm (4½")
Mid 	Diameter Fø30mm (1⅜") Bø30mm (1⅜") Fø38mm (1½") Bø30mm (1⅜") Fø38mm (1½") Bø38mm (1½")	Projection from wall to pole centre F160mm (6⅝") B60mm (2⅝") F160mm (6⅝") B60mm (2⅝") F160mm (6⅝") B60mm (2⅝")	Fixing plate size w114mm (4½") x h57mm (2¼") w114mm (4½") x h57mm (2¼") w114mm (4½") x h57mm (2¼")
Partition 	Diameter Fø30mm (1⅜") Bø30mm (1⅜") Fø38mm (1½") Bø38mm (1½")	Drop from ceiling to top of pole 7mm (¼") 7mm (¼")	Fixing plate size w89mm (3½") x h38mm (1½") w89mm (3½") x h38mm (1½")

CUSTOM BRACKETS *Designed to suit any window. ⚙️*

Custom Projection 	Custom Fixing Plate 	Uplift 	Ceiling Brackets 	Angled Brackets 
<i>Specify the exact projection needed.</i>	<i>Relevant where space is restricted or weight is a concern.</i>	<i>Helps negotiate cornice & similar architectural features.</i>	<i>Specify exact drop required from ceiling.</i>	<i>The solution for tight and awkward locations.</i>

RINGS

Float rings are engineered with acetal rollers and liners for smooth operation and a consistent upright position. By design, they pass brackets flawlessly.

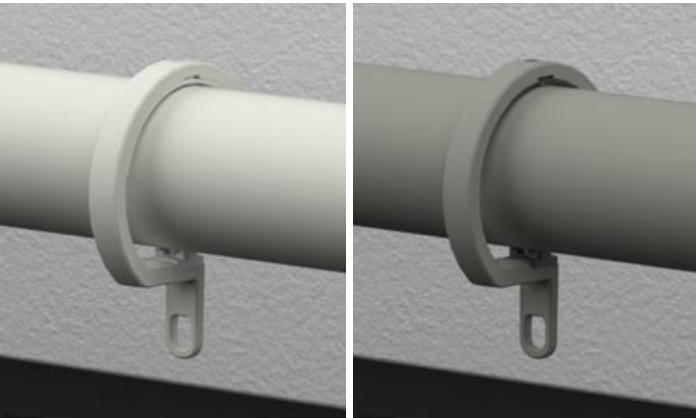

Gypsum Roller & Liner Anthracite Roller & Liner

Ⓜ Ring drop from top of pole to bottom of ringlet
For finish colour coordination see the specification guide www.bradleycollection.com/specification-guides/

Ring

For standard headings.

⌀30mm (1⅜") Ring dropⓂ: 49mm (1⅞")
⌀38mm (1½") Ring dropⓂ: 62mm (2⅞")

Sine Ring

For use with wave-style tape.

⌀30mm (1⅜") Ring dropⓂ: 49mm (1⅞")
⌀38mm (1½") Ring dropⓂ: 62mm (2⅞")
Sine Pitch: 80mm (3⅓")

POLES

Poles are cut, bent and curved to suit individual requirements. When calculating the length of your pole, remember to allow tolerance beyond the width of the frame for the curtains to stack back to the edge of the window.

Poles exceeding the maximum length will be cut into equal parts unless otherwise specified. A pole joiner will be supplied.



Size	Maximum distance between brackets	Maximum length in one piece	Standard Bend radius
⌀30mm (1⅜")	1000mm (39")	4000mm (157")Ⓜ	Ⓜ250mm (10")
⌀38mm (1½")	1000mm (39")	4000mm (157")Ⓜ	Ⓜ400mm (16")

ACCESSORIES

Ombres

Small




Internal projection from wall: 150mm (5⅞")
Fixing plate size: ⌀19mm (¾")

Grand



Internal projection from wall: 150mm (5⅞")
Fixing plate size: ⌀25mm (1")

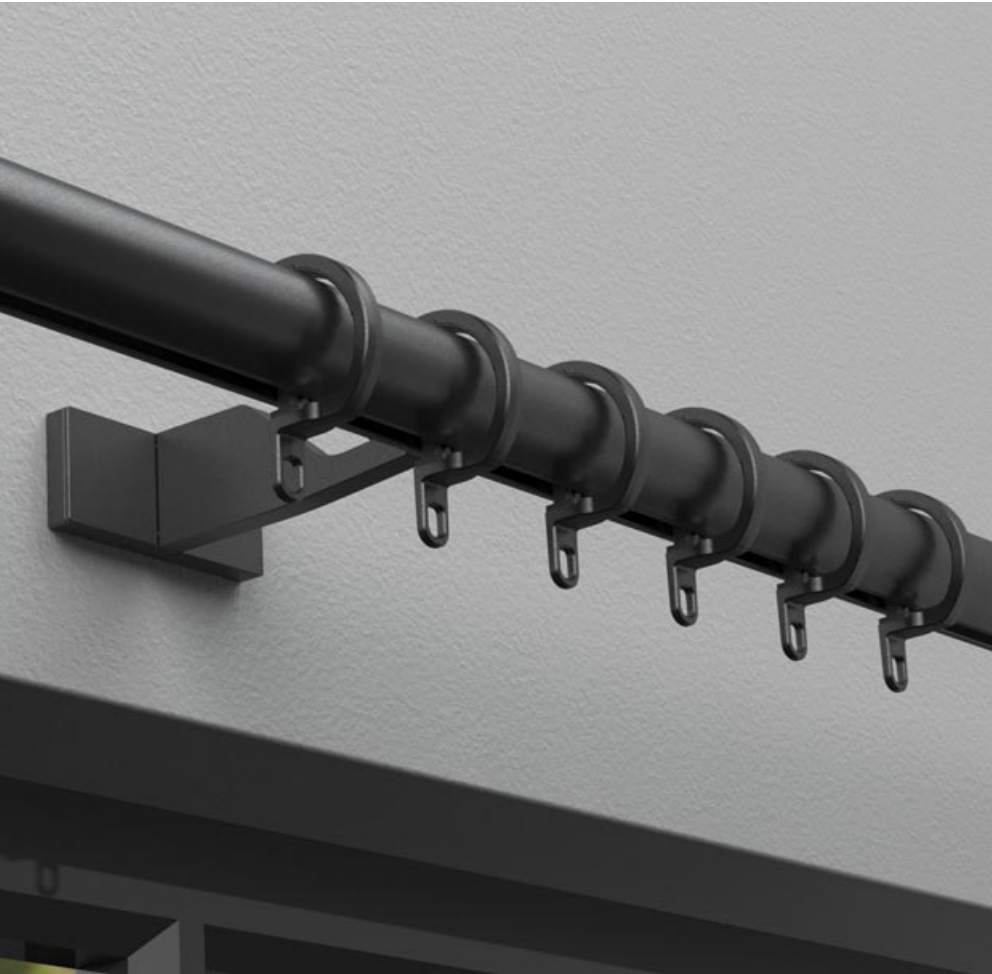

Draw Rod

Seamless



Draw rod length:
1000mm (39⅞")
Custom lengths available to order



MIO

Mio embodies modern sophistication, where laser-cut precision meets refined design.

Choose the cool, durable elegance of brushed stainless or the subtle warmth of contemporary finishes.

Mio. Sharp form. Pure intent

Pictured: ø25mm (1") French • Flint - Satin


Drapery design: Jim Davis Designs • USA | @jimdavisdesigns • www.jimdavisdesigns.com

Interior design: Anna King | @annakingandco • www.annakingandco.com

MIO

STAINLESS

All Mio designs are available in stainless steel. This corrosion resistant material makes the collection ideal for wet rooms and oceanfront properties.

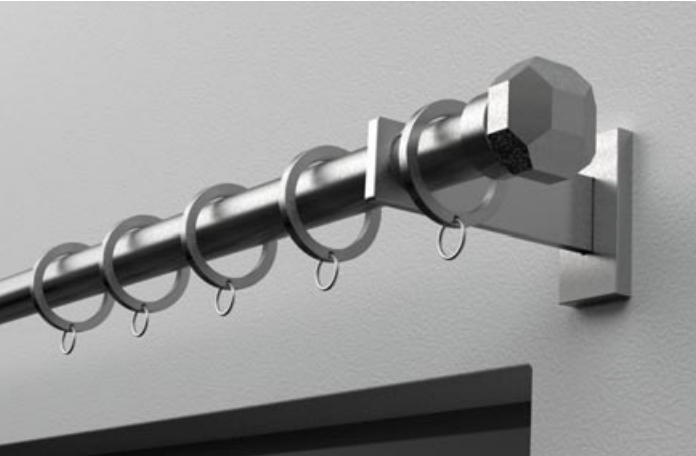

ANY LENGTH

Poles can be cut to any length.Ⓢ On longer systems, the use of passing brackets & rings will allow uninterrupted travel of the drapes along the full length of the system.



ADJUSTABLE

No more compromises. Our adjustable brackets let you customise the projection, ensuring smooth curtain movement. Strong, stylish and simple to install.




SCALE

With five pole diameters to choose from, Mio provides versatility in scale - from the refined simplicity of café rods to the dramatic presence of bold statement designs.



BRACKET SUITE

Bracket options include wall, ceiling and double designs. Each is fitted with a magnetic cover plate to hide fixings, with custom projections and configurations available upon request.

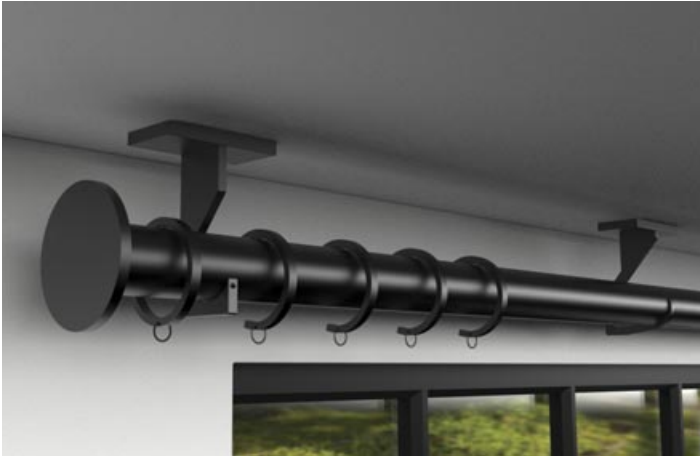

BENT TO SHAPE

A bespoke bay bending and curvingⓈ service is available on all diameters, to allow the perfect shaped pole for any window.



Pictured left to right:
ø30mm (1 1/4") • Faceted Disc • Burnt Ash - Matte
50mm (2") • Ball • Grey Moss - Matte
ø25mm (1") Large Disc • Charcoal - Matte
19mm (3/4") • Stud • Stone - Matte
ø38mm (1 1/2") • Pebble - Moss - Matte



Pictured: ø25mm (1") French • Flint - Satin
Drapery design: Jim Davis Designs • USA | @ jimdavisdesigns • www.jimdavisdesigns.com
Interior design: Anna King | @ annakingandco • www.annakingandco.com

MIO

The Mio French pole combines traditional elegance with modern engineering: sharp lines, lined rings for smooth running and cleverly concealed fixings.

SINGLE FRENCH

A simple and elegant treatment, especially suited to taller, narrower windows.



DOUBLE FRENCH

A smart design, improving installation and offering the benefits of the French look with the added privacy of a second layer of drapes.



CAFÉ RODS

Designed for privacy without sacrificing design, our café rods are ideal for windows that deserve a softer touch. Perfect for kitchens, bathrooms, or street-facing rooms, they support stylish lower-panel curtains that shield your space while keeping it bright and open.



Pictured: ø12.5mm (1/2") Café Rod • Brushed Stainless Steel





Pictured: ø50mm (2") Pole • Stud • Brushed Stainless
Interior design: Bayon Design Studio Inc • California - USA

STAINLESS FINISHES

The intrinsic corrosion resistance of stainless steel makes it an ideal choice for oceanfront properties and for kitchens, bathrooms and wet rooms.

The iconic Brushed Stainless finish gives an industrial aesthetic, while stainless steel can also be coated on request for a softer look on this durable material.



Brushed Stainless ©

© Not available with French poles options

FINISHES

Mio has an unparalleled selection of subtle colour coats, which can be specified in matte, satin or gloss finishes.

For more glamorous projects, metallic coats are featured in both satin and gloss.

SHADES

A superb selection of opaque colours, all available in a choice of Matte, Satin or Gloss finish.

Cloud ☹☹☹Alabaster ☹☹☹Bone ☹☹☹Barley ☹☹☹Dusk ☹☹☹Mineral ☹☹☹

Cream ☹☹☹Dove ☹☹☹Parchment ☹☹☹Millstone ☹☹☹Oatmeal ☹☹☹Stone ☹☹☹

Clay ☹☹☹Grey Moss ☹☹☹Cocoa ☹☹☹Moss ☹☹☹Lead ☹☹☹Earth ☹☹☹

Smoke ☹☹☹Frame Grey ☹☹☹Burnt Ash ☹☹☹Flint ☹☹☹Charcoal ☹☹☹Raven ☹☹☹

COAT OPTIONS

Matte ☹Satin ☹Gloss ☹

METALLICS

High metallic fleck coatings with most available in Satin and Gloss sheen levels.

Platinum ☹☹Champagne ☹☹Gold ☹☹

Cognac ☹☹Antique Brass ☹☹Gunmetal ☹☹

Bronzed ☹☹Pewter ☹☹Natural Silver

ANODICS

A flat metal colour group, with an anodised style.

TwilightGlowSky

SunriseStormGlimmer

SunsetNight SkyMidnight

BRIGHTS

Polished plated finishes provide a traditional sense of luxury.



Polished Nickel ☹☹

FINIALS

Simplicity of design and purity of form.

Pictured left to right:
ø25mm (1") | Flush Stud • Dove - Matte | Crystal Ball • Platinum - Satin
Large Disc • Oatmeal - Satin | Squat Disc • Cocoa - Gloss | Faceted Disc • Bronzed - Gloss



Flush Stud

ø19mm (¾") Inclusive Length 6mm (¼")
ø25mm (1") Inclusive Length 6mm (¼")
ø38mm (1½") Inclusive Length 8mm (⅝")
ø50mm (2") Inclusive Length 8mm (⅝")



Stud

ø12.5mm (½") Inclusive Length 2mm (⅛")
ø19mm (¾") Inclusive Length 2mm (⅛")
ø25mm (1") Inclusive Length 3mm (⅙")
ø38mm (1½") Inclusive Length 3mm (⅙")
ø50mm (2") Inclusive Length 4mm (⅓")



Disc

ø19mm (¾") Inclusive Length 2mm (⅛")
ø25mm (1") Inclusive Length 3mm (⅙")
ø38mm (1½") Inclusive Length 3mm (⅙")
ø50mm (2") Inclusive Length 4mm (⅓")



Large Disc

ø19mm (¾") Inclusive Length 4mm (⅓")
ø25mm (1") Inclusive Length 4mm (⅓")
ø38mm (1½") Inclusive Length 6mm (½")
ø50mm (2") Inclusive Length 6mm (½")



Squat Disc

ø19mm (¾") Inclusive Length 17mm (⅙")
ø25mm (1") Inclusive Length 23mm (⅞")
ø38mm (1½") Inclusive Length 33mm (1⅜")
ø50mm (2") Inclusive Length 44mm (1¾")



Faceted Disc

ø19mm (¾") Inclusive Length 21mm (⅞")
ø25mm (1") Inclusive Length 28mm (1⅙")
ø38mm (1½") Inclusive Length 41mm (1⅝")
ø50mm (2") Inclusive Length 54mm (2⅙")



Pebble

ø19mm (¾") Inclusive Length 25mm (1")
ø25mm (1") Inclusive Length 34mm (1⅙")
ø38mm (1½") Inclusive Length 50mm (1⅝")
ø50mm (2") Inclusive Length 66mm (2⅝")



Ball

ø19mm (¾") Inclusive Length 50mm (2")
ø25mm (1") Inclusive Length 63mm (2½")
ø38mm (1½") Inclusive Length 83mm (3¼")
ø50mm (2") Inclusive Length 104mm (4⅛")



Crystal Ball*

ø19mm (¾") Inclusive Length 55mm (3⅙")
ø25mm (1") Inclusive Length 66mm (2⅝")
ø38mm (1½") Inclusive Length 85mm (3⅜")
ø50mm (2") Inclusive Length 108mm (4¼")

*: Crystal Finials should not be positioned in direct sunlight
For full technical information, sizes and weights please download the specification guide - www.bradleycollection.com/downloads/

BRACKET OPTIONS

SINGLE *For straightforward applications.*

Side		Diameter	Projection from wall to pole centre	Fixing plate size
		ø12.5mm (½")	40mm (1⅙")	w23mm (⅞") x H50mm (2")
		ø19mm (¾")	60mm (2⅜") • 100mm (4")	w34mm (1⅝") x H70mm (2¾")
		ø25mm (1")	60mm (2⅜") • 100mm (4")	w34mm (1⅝") x H70mm (2¾")
		ø38mm (1½")	100mm (4")	w52mm (2⅙") x H104mm (4⅞")
		ø50mm (2")	100mm (4")	w52mm (2⅙") x H104mm (4⅞")
Mid	Passing ⓘ	Diameter	Projection from wall to pole centre	Fixing plate size
 		ø12.5mm (½")	40mm (1⅙")	w50mm (2") x H23mm (⅞")
		ø19mm (¾")	60mm (2⅜") • 100mm (4")	w70mm (2¾") x H34mm (1⅝")
		ø25mm (1")	60mm (2⅜") • 100mm (4") • 140mm (5½") ⓘ	w70mm (2¾") x H34mm (1⅝")
		ø38mm (1½")	100mm (4")	w104mm (4⅞") x H52mm (2⅙")
		ø50mm (2")	100mm (4")	w104mm (4⅞") x H52mm (2⅙")
Ceiling	Passing	Diameter	Drop from ceiling to pole centre	Fixing plate size
 		ø19mm (¾")	60mm (2⅜") • 100mm (4")	w70mm (2¾") x H34mm (1⅝")
		ø25mm (1")	60mm (2⅜") • 100mm (4")	w70mm (2¾") x H34mm (1⅝")
		ø38mm (1½")	100mm (4")	w104mm (4⅞") x H52mm (2⅙")
		ø50mm (2")	100mm (4")	w104mm (4⅞") x H52mm (2⅙")

RECESS *Designed for rebates.*

Recess <i>With hook stop</i>	Diameter	Depth off wall	Fixing plate size
	ø19mm (¾")	7mm (¼")	ø26mm (1")
	ø25mm (1")	8mm (⅕")	ø34mm (1⅝")
	ø38mm (1½")	12mm (½")	ø49mm (1⅙")
	ø50mm (2")	15mm (⅖")	ø64mm (2½")

ADJUSTABLE *Designed to give flexibility during installation.*

Side		Diameter	Projection from wall to pole centre	Fixing plate size
		ø19mm (¾")	Min.90mm (3⅝") Max.110mm (4⅝")	w34mm (1⅝") x H70mm (2¾")
		ø25mm (1")	Min.90mm (3⅝") Max.110mm (4⅝")	w34mm (1⅝") x H70mm (2¾")
		ø38mm (1½")	Min.100mm (4") Max.120mm (4¾")	w52mm (2⅙") x H104mm (4⅞")
Mid	Passing	Diameter	Projection from wall to pole centre	Fixing plate size
 		ø19mm (¾")	Min.90mm (3⅝") Max.110mm (4⅝")	w70mm (2¾") x H34mm (1⅝")
		ø25mm (1")	Min.90mm (3⅝") Max.110mm (4⅝")	w70mm (2¾") x H34mm (1⅝")
		ø38mm (1½")	Min.100mm (4") Max.120mm (4¾")	w104mm (4⅞") x H52mm (2⅙")

FRENCH *For the classic French look.*

Single - End ⓘ	Diameter	Projection from wall to pole centre	Fixing plate size
	ø25mm (1")	100mm (4"), 140mm (5½") ⓘ	w26mm (1") x H80mm (3⅓")
Double - End ⓘ ⓘ	Diameter	Projection from wall to pole centre	Fixing plate size
	Fø25mm (1")	F160mm (6⅙")	w74mm (2⅙") x H113mm (4⅞")
	Bø19mm (¾")	B60mm (2⅜")	
Café - End	Diameter	Depth off wall	Fixing plate size
	ø12.5mm (½")	6mm (¼")	ø42mm (1⅝")
Café - Face <i>Drop in option available</i>	Diameter	Projection from wall to pole centre	Fixing plate size
	ø12.5mm (½")	25mm (1") • 40mm (1⅙")	w30mm (1⅙") x H80mm (3⅓")

DOUBLE *Designed for layered shading.*

Side		Diameter	Projection from wall to pole centre	Fixing plate size	
		Fø25mm (1")	F160mm (6⅙")	w34mm (1⅝") x H70mm (2¾")	
		Bø19mm (¾")	B60mm (2 ⅜")		
		Fø38mm (1½")	F160mm (6⅙")	w52mm (2⅙") x H104mm (4⅞")	
		Bø25mm (1")	B60mm (2 ⅜")		
Mid	Passing	Diameter	Projection from wall to pole centre	Mid fixing plate size	Passing fixing plate size
 		Fø25mm (1")	F160mm (6⅙")	w70mm (2¾") x H34mm (1⅝")	w72mm (2⅜") x H59mm (2⅙")
		Bø19mm (¾")	B60mm (2 ⅜")		
		Fø38mm (1½")	F160mm (6⅙")	w104mm (4⅞") x H52mm (2⅙")	w52mm (2⅙") x H104mm (4⅞")
		Bø25mm (1")	B60mm (2 ⅜")		

CUSTOM BRACKETS *Specialist designs can be produced for awkward or unusual installations. ⓘ*

Custom Projection	Custom Fixing Plate	Uplift	Angled Brackets
			
Specify the exact projection needed.	Relevant where space is restricted or weight is a concern.	Helps negotiate cornice and similar architectural features.	The solution for tight and awkward locations.

ⓘ 140mm (5½") Mid & Passing brackets only available on French poles | ⓘ Passing option not available on 12.5mm (½")
ⓘ Handed Item - Left and Right version available | ⓘ Not available with brushed finishes

ⓘ Custom Brackets shown are for illustration purposes. Brackets are designed on a project basis to specific requirements.
For full technical information, sizes and weights please download the specification guide - www.bradleycollection.com/downloads/

LINED RINGS

Mio rings pair geometric simplicity with a smart nylon liner, ensuring smooth and quiet curtain travel.



Ring ☉



- ☉12.5mm (½") Ring drop☉: 39mm (1⅞")
- ☉19mm (¾") Ring drop☉: 44mm (1¾")
- ☉25mm (1") Ring drop☉: 53mm (2⅙")
- ☉38mm (1½") Ring drop☉: 66mm (2⅝")
- ☉50mm (2") Ring drop☉: 80mm (3⅙")

Passing Ring ☉



- ☉12.5mm (½"): n/a
- ☉19mm (¾") Ring drop☉: 44mm (1¾")
- ☉25mm (1") Ring drop☉: 53mm (2⅙")
- ☉38mm (1½") Ring drop☉: 66mm (2⅝")
- ☉50mm (2") Ring drop☉: 80mm (3⅙")

☉ Ring drop from top of pole to bottom of ringlet | ☉ Rings are unlined - Passing option not available on 12.5mm (½")

POLES

Poles are cut, bent and curved to suit individual requirements. When calculating the length of your pole, remember to allow tolerance beyond the width of the frame for the curtains to draw back to the edge of the window.

Poles exceeding the recommended maximum distance between brackets, will be cut into equal parts unless otherwise specified.

Pole joiners will be supplied.

Size	Recommended curtain type for pole diameter	Maximum distance between brackets	Maximum length in one piece	Standard Bend radius	French Pole Bend radius
12.5mm (½")	Light weight sheer & voile curtains	1200mm (47")	4000mm (157")☉	℞75mm (3")	n/a
19mm (¾")	Light to medium weight, lined & non interlined curtains	1800mm (71")	4000mm (157")☉	℞75mm (3")	n/a
25mm (1")	Medium weight, lined & interlined curtains	2000mm (79")	4000mm (157")☉	℞100mm (4")	℞75mm (3")
38mm (1½")	Medium to heavy weight, lined & interlined curtains	2200mm (87")	4000mm (157")☉	℞255mm (10")	n/a
50mm (2")	Heavy weight interlined curtains	2400mm (96")	4000mm (157")☉	℞255mm (10")	n/a

☉ Section lengths over 2.4m (94") will incur a handling charge
For full technical information, sizes and weights please download the specification guide - www.bradleycollection.com/downloads/

ACCESSORIES

Ombres

Small



Internal projection from wall: 150mm (5⅞")
Fixing plate size: ø19mm (¾")

Large



Internal projection from wall: 150mm (5⅞")
Fixing plate size: ø25mm (1")

Hold back



Internal measurement: 137mm (5⅜")
Fixing plate size: ø44mm (1¾")

Tie Back Hook



Projection: 29mm (1⅛")
Fixing plate size: w25mm (1") x h74mm (2⅝⅙")

Drapery Arm

Drapery arms have been designed to work at dormer windows, doorways & above beds.



Diameter: ø25mm (1")
Fixing plate size: w34mm (1⅝⅙") x h156mm (6⅙")

Draw Rods☉

Fine



Standard



Draw rod length: 1000mm (39⅜")
Custom lengths available to order

☉ Not recommended for use with passing rings.



ELYSIAN

Uniting pared-down modernist style with a touch of decoration, Elysian is offered in an inspirational range of solid and metallic finishes.

Timeless. Modern. Inspired

Pictured: ø50mm (2") Pole • Templar • Flint - Satin
Interior Design: Wynd Design • Wynyard - UK | @ wynddesign

ELYSIAN

Pictured left to right:
ø38mm (1½") Pole • Orbit • Champagne - Satin
ø30mm (1¾") Pole • Aura • Gold - Satin
ø50mm (2") Pole • Discus • Antique Brass - Satin


SCALE

Available in three pole diameters
Ø30mm (1¾") • 38mm (1½") • 50mm (2").
Each component is carefully designed and
scaled to reflect the design intent.



ANY LENGTH

Elysian can be cut to any length.® Passing brackets & rings
allow curtains to travel the full system length.

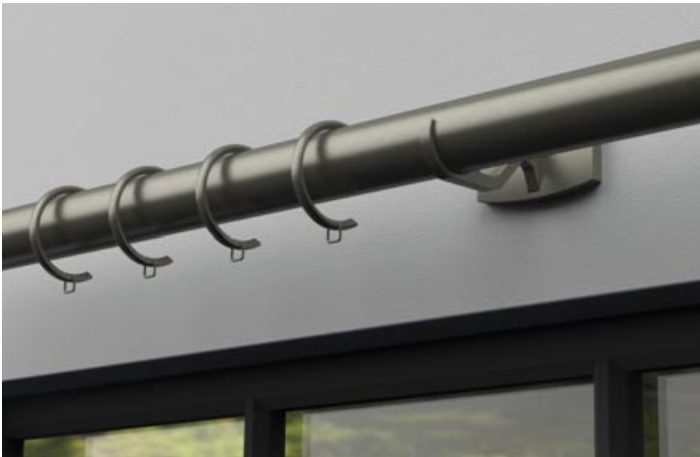

BRACKET SUITE

A range of bracket options has been designed to allow easy
installation. All wall & ceiling brackets have a magnetic
cover plate to hide screw fixings. Brackets can also be
supplied to custom projections and designs.



BAYS AND CURVES

Elysian offers a bespoke bay bending and curving service
to fit any bay window.



® Supplied in sections - Maximum section per length 4.0m (157")
Section lengths over 2.4m (94") will incur a handling charge


ADJUSTABLE

Engineered for easier installation. The design allows for
seamless projection adjustment, ensuring professional results.



ACCESSORIES

Thoughtfully designed accessories improve functionality
of the system without compromising the aesthetic.

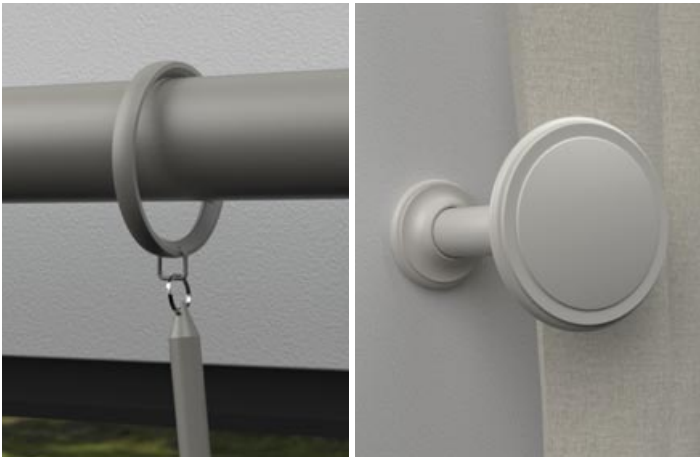

FINISHES

An unparalleled selection of coated and plated finishes, allows Elysian to express emotions ranging from the sober and understated to the glamorous and flamboyant.

SHADES

A superb selection of opaque colours, all available in a choice of Matte, Satin or Gloss finish.

COAT OPTIONS

Matte M Satin S Gloss G

Cloud M S G	Alabaster M S G	Bone M S G	Barley M S G	Dusk M S G	Mineral M S G
Cream M S G	Dove M S G	Parchment M S G	Millstone M S G	Oatmeal M S G	Stone M S G
Clay M S G	Grey Moss M S G	Cocoa M S G	Moss M S G	Lead M S G	Earth M S G
Smoke M S G	Frame Grey M S G	Burnt Ash M S G	Flint M S G	Charcoal M S G	Raven M S G

METALLICS

High metallic fleck coatings. Available in Satin and Gloss sheen levels.

Platinum S G	Champagne S G	Gold S G
Cognac S G	Antique Brass S G	Gunmetal S G
Bronzed S G	Pewter S G	

ANODICS

A flat metal colour group, with an anodised style.

Twilight	Glow	Sky
Sunrise	Storm	Glimmer
Sunset	Night Sky	Midnight

BRIGHTS

Polished plated finishes provide a traditional sense of luxury.



Pictured:
ø38mm (1½”) Pole • Orbit • Polished Nickel



Polished Nickel S G

FINIALS

Traditional styling cues have been streamlined to suit modern living, resulting in the distinctive curvilinear character of Elysian.

Pictured left to right: ø38mm (1½”) Pole | Ribbed Globe • Earth - Matte | Crystal Templar • Millstone - Matte
Globe • Lead - Matte | Squat Globe • Clay - Matte | Templar • Cocoa - Matte | Flute • Flint - Matte
Halo • Parchment - Matte | Charm • Oatmeal - Matte



Halo

ø30mm (1⅜”) Inclusive Length 5mm (⅜”)
ø38mm (1½”) Inclusive Length 2mm (⅛”)
ø50mm (2”) Inclusive Length 2mm (⅛”)



Aura

ø30mm (1⅜”) Inclusive Length 5mm (⅜”)
ø38mm (1½”) Inclusive Length 2mm (⅛”)
ø50mm (2”) Inclusive Length 2mm (⅛”)



Orbit

ø30mm (1⅜”) Inclusive Length 36mm (1⅞”)
ø38mm (1½”) Inclusive Length 40mm (1⅝”)
ø50mm (2”) Inclusive Length 52mm (2⅙”)



Squat Globe

ø30mm (1⅜”) Inclusive Length 53mm (2⅞”)
ø38mm (1½”) Inclusive Length 63mm (2½”)
ø50mm (2”) Inclusive Length 81mm (3⅜”)



Globe

ø30mm (1⅜”) Inclusive Length 73mm (2⅞”)
ø38mm (1½”) Inclusive Length 92mm (3⅝”)
ø50mm (2”) Inclusive Length 114mm (4½”)



Ribbed Globe

ø30mm (1⅜”) Inclusive Length 73mm (2⅞”)
ø38mm (1½”) Inclusive Length 92mm (3⅝”)
ø50mm (2”) Inclusive Length 114mm (4½”)



Discus

ø30mm (1⅜”) Inclusive Length 39mm (1½”)
ø38mm (1½”) Inclusive Length 44mm (1¾”)
ø50mm (2”) Inclusive Length 58mm (2⅝”)



Jewel

ø30mm (1⅜”) Inclusive Length 37mm (1⅞”)
ø38mm (1½”) Inclusive Length 42mm (1⅝”)
ø50mm (2”) Inclusive Length 55mm (2⅞”)



Flute

ø30mm (1⅜”) Inclusive Length 73mm (2⅞”)
ø38mm (1½”) Inclusive Length 69mm (2⅞”)
ø50mm (2”) Inclusive Length 114mm (4½”)



Charm

ø30mm (1⅜”) Inclusive Length 69mm (2⅞”)
ø38mm (1½”) Inclusive Length 85mm (3⅜”)
ø50mm (2”) Inclusive Length 117mm (4⅝”)



Templar

ø30mm (1⅜”) Inclusive Length 79mm (3⅝”)
ø38mm (1½”) Inclusive Length 92mm (3⅝”)
ø50mm (2”) Inclusive Length 119mm (4⅞”)



Crystal Templar*

ø38mm (1½”) Inclusive Length 92mm (3⅝”)
ø50mm (2”) Inclusive Length 119mm (4⅞”)

* Crystal Finials should not be positioned in direct sunlight
For full technical information, sizes and weights please download the specification guide - www.bradleycollection.com/downloads/

BRACKET OPTIONS

SINGLE *For straightforward applications.*

Side		Diameter	Projection from wall to pole centre	Fixing plate size
		ø30mm (1⅜")	100mm (4")	w40mm (1⅝") x h86mm (3⅜")
		ø38mm (1½")	100mm (4")	w50mm (2") x h105mm (4⅞")
		ø50mm (2")	100mm (4")	w50mm (2") x h105mm (4⅞")
Mid		Diameter	Projection from wall to pole centre	Fixing plate size
		ø30mm (1⅜")	100mm (4")	w86mm (3⅜") x h40mm (1⅝")
		ø38mm (1½")	100mm (4")	w105mm (4⅞") x h50mm (2")
		ø50mm (2")	100mm (4")	w105mm (4⅞") x h50mm (2")
Ceiling		Diameter	Projection from wall to pole centre	Fixing plate size
		ø30mm (1⅜")	100mm (4")	w86mm (3⅜") x h40mm (1⅝")
		ø38mm (1½")	100mm (4")	w105mm (4⅞") x h50mm (2")
		ø50mm (2")	100mm (4")	w105mm (4⅞") x h50mm (2")

RECESS *Designed for rebates.*

Recess <i>With hook stop</i>	Diameter	Depth off wall	Fixing plate size
	ø30mm (1⅜")	10mm (⅜")	ø40mm (1⅝")
	ø38mm (1½")	12mm (½")	ø49mm (1⅞")
	ø50mm (2")	15mm (⅝")	ø64mm (2½")

ADJUSTABLE *Designed to give flexibility during installation.*

Side		Diameter	Projection from wall to pole centre	Fixing plate size
		ø30mm (1⅜")	Min.90mm (3⅝") Max.110mm (4⅝")	w40mm (1⅝") x h86mm (3⅜")
		ø38mm (1½")	Min.100mm (4") Max.115mm (4½")	w50mm (2") x h105mm (4⅞")
Mid		Diameter	Projection from wall to pole centre	Fixing plate size
		ø30mm (1⅜")	Min.90mm (3⅝") Max.110mm (4⅝")	w86mm (3⅜") x h40mm (1⅝")
		ø38mm (1½")	Min.100mm (4") Max.115mm (4½")	w105mm (4⅞") x h50mm (2")

DOUBLE BRACKETS

DOUBLE *Designed for layered shading.*

Side		Diameter	Projection from wall to pole centre	Fixing plate size	
		Fø38mm (1½")	F200mm (8")	w50mm (2") x	
		Bø30mm (1⅜")	B60mm (2⅜")	H105mm (4⅞")	
		Fø50mm (2")	F200mm (8")	w50mm (2")x	
		Bø30mm (1⅜")	B60mm (2⅜")	H105mm (4⅞")	
Mid	Passing	Diameter	Projection from wall to pole centre	Mid Fixing plate size	Passing Fixing plate size
		Fø38mm (1½")	F200mm (8")	w105mm (4⅞") x	w105mm (4⅞") x
		Bø30mm (1⅜")	B60mm (2⅜")	H50mm (2")	H50mm (2")
		Fø50mm (2")	F200mm (8")	w105mm (4⅞") x	w105mm (4⅞") x
		Bø30mm (1⅜")	B60mm (2⅜")	H50mm (2")	H50mm (2")

CUSTOM BRACKETS *Specialist designs can be produced for awkward or unusual installations.* ⓘ

Custom Projection	Custom Fixing Plate	Uplift	Custom Ceiling	Angled Brackets
				
<i>Specify the exact projection needed.</i>	<i>Relevant where space is restricted or weight is a concern.</i>	<i>Helps negotiate cornice & similar architectural features.</i>	<i>Specify exact drop required from ceiling.</i>	<i>The solution for tight and awkward locations.</i>

LINED RINGS

Elysian rings feature sleek contours and softly rounded edges, creating a timeless aesthetic. Each ring is lined to ensure smooth, quiet running.



Ⓢ Ring drop from top of pole to bottom of ringlet

Ring



⌀30mm (1¹/₁₆") Ring dropⓈ: 51mm (2")
⌀38mm (1¹/₂") Ring dropⓈ: 66mm (2⁵/₈")
⌀50mm (2") Ring dropⓈ: 80mm (3¹/₈")

Passing Ring




⌀30mm (1¹/₁₆") Ring dropⓈ: 51mm (2")
⌀38mm (1¹/₂") Ring dropⓈ: 66mm (2⁵/₈")
⌀50mm (2") Ring dropⓈ: 80mm (3¹/₈")

POLES

Poles are cut, bent and curved to suit individual requirements. When calculating the length of your pole, remember to allow tolerance beyond the width of the frame for the curtains to draw back to the edge of the window.

Poles exceeding the recommended maximum distance between brackets, will be cut into equal parts unless otherwise specified.

Pole joiners will be supplied.

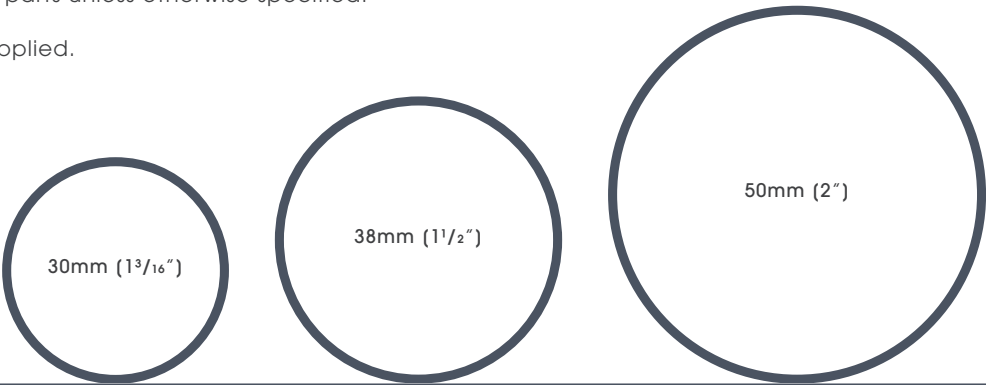

Size	Recommended curtain type for pole diameter	Maximum distance between brackets	Maximum length in one piece	Standard Bend radius
⌀30mm (1 ³ / ₁₆ ")	Medium weight, lined & interlined curtains	2100mm (83")	4000mm (157")Ⓢ	⌀255mm (10")
⌀38mm (1 ¹ / ₂ ")	Medium to heavy weight, lined & interlined curtains	2200mm (87")	4000mm (157")Ⓢ	⌀255mm (10")
⌀50mm (2")	Heavy weight interlined curtains	2400mm (96")	4000mm (157")Ⓢ	⌀255mm (10")

Ⓢ Section lengths over 2.4m (94") will incur a handling charge
For full technical information, sizes and weights please download the specification guide - www.bradleycollection.com/downloads/

ACCESSORIES

Ombres



Internal projection from wall: 150mm (5¹⁵/₁₆")
Fixing plate size: ⌀68mm (2¹¹/₁₆")

Hold back



Internal measurement: 137mm (5³/₈")
Fixing plate size: ⌀44mm (1³/₄")

Tie Back Hook



Projection: 29mm (1¹/₈")
Fixing plate size: w25mm (1") x h74mm (2¹⁵/₁₆")

Ⓢ Not recommended for use with passing rings.

Draw RodsⓈ

Fine Standard



Draw rod length:
1000mm (39³/₈")
Custom lengths available to order



STEEL

The Steel Collection remains a byword in elegance. Historical design cues, high quality materials and traditional artisan skills are all on display in this timeless classic.

Timeless elegance, forged by Tradition

Pictured: ø25mm (1") Pole • Flared Disc • Brass Toned
Interior design: Georgia Victoria • Edinburgh - UK

STEEL

PURE FORM

Crafted in five pole diameters, the Steel Collection offers scale and proportion to suit every interior - from the delicate café rod to the most dramatic centrepiece.



ANY LENGTH

Poles can be cut to any length.Ⓢ On longer systems, the use of passing brackets & rings will allow uninterrupted travel of the drapes along the full length of the system.



FUNCTION

Brackets are designed for easy installation, with an optional magnetic cover plate. Brackets can be supplied to custom projections and designs.



CRAFTED IN SUFFOLK

A picture of elegance, the Steel Collection blends innovative design with quality craftsmanship.



ON THE FORGE

Authentic, hand-forged Steel - subtle hammer marks preserved, proportions meticulously refined.



ADJUSTABLE

Crafted for flexibility, tailored projection when working around window frames, radiators, or unique architectural details. These brackets adapt to your space.



BENT TO SHAPE

A bespoke bay bending and curvingⓈ service is available on all diameters to allow the perfect shaped pole to fit any bay window.



Ⓢ Supplied in sections - Maximum section per length 4.0m (157") - Section lengths over 2.4m (94") will incur a handling charge | Ⓢ Curving option not available on 12.5mm (½")



Pictured: ø25mm (1") French Pole • Flared Disc • Flint - Satin
Interior design: Sue Bond Interiors - UK
Drapery design: The Curtain Tailor - UK

STEEL

FRENCH POLES

The French pole from the Steel Collection is an iconic design favourite. A simple and sophisticated way to adorn windows.



End Bracket



Covered End Bracket

STEEL

CAFÉ RODS

Whether a public space or a kitchen window, our café rods provide the perfect balance of privacy and light.

Designed to support half-length curtains, they offer the coverage you desire - without obstructing natural light or beautiful views.



Pictured: ø12.5mm (1/2") Café Rod • Oil Rubbed




FINISHES



Pictured left to right: ø25mm (1") Pole | Medium Stud • Natural Steel | Ball & Collar • Oil Rubbed Standard Stud • Brass Toned | Button Stud • Waxed | Large Stud • Bronzed - Satin Ribbed Ball & Collar • Antique Brass - Satin | Pebble • Polished | Flared Disc • Flint - Satin Hammered Stud • Matte Brass Toned

Signature translucent finishes of the Steel Collection allow the beauty of steel to shine through.

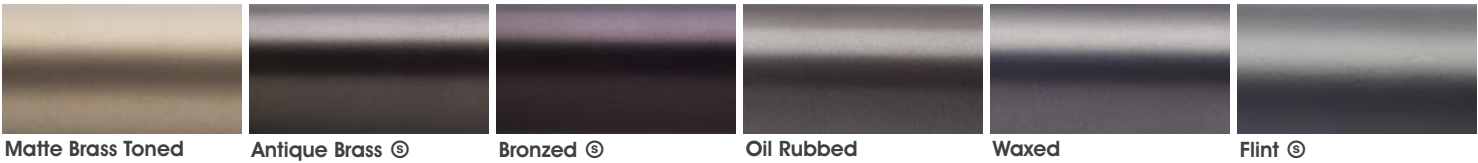

© Satin Coat
Due to printing limitations colours in this brochure may not be accurate Samples are available on request - www.bradleycollection.com/samples/

FINIALS

Simplicity is the watchword for this grouping of stud, disc and ball designs.



Standard Stud

ø12.5mm (½”) Inclusive Length 3mm (⅛”)
ø19mm (¾”) Inclusive Length 6mm (¼”)
ø25mm (1”) Inclusive Length 8mm (⅝”)
ø38mm (1½”) Inclusive Length 10mm (⅜”)
ø50mm (2”) Inclusive Length 12mm (½”)



Medium Stud

ø19mm (¾”) Inclusive Length 6mm (¼”)
ø25mm (1”) Inclusive Length 8mm (⅝”)
ø38mm (1½”) Inclusive Length 10mm (⅜”)
ø50mm (2”) Inclusive Length 12mm (½”)



Large Stud

ø19mm (¾”) Inclusive Length 6mm (¼”)
ø25mm (1”) Inclusive Length 8mm (⅝”)
ø38mm (1½”) Inclusive Length 10mm (⅜”)
ø50mm (2”) Inclusive Length 12mm (½”)

Hammered Stud

ø19mm (¾”) Inclusive Length 10mm (⅜”)
ø25mm (1”) Inclusive Length 12mm (½”)
ø38mm (1½”) Inclusive Length 16mm (⅝”)
ø50mm (2”) Inclusive Length 20mm (1⅜”)



Button Stud

ø19mm (¾”) Inclusive Length 26mm (1”)
ø25mm (1”) Inclusive Length 40mm (1⅝”)
ø38mm (1½”) Inclusive Length 59mm (2⅝”)
ø50mm (2”) Inclusive Length 69mm (2⅞”)

Pebble

ø19mm (¾”) Inclusive Length 27mm (1⅛”)
ø25mm (1”) Inclusive Length 31mm (1¼”)
ø38mm (1½”) Inclusive Length 48mm (1⅞”)



Flared Stud

ø19mm (¾”) Inclusive Length 12mm (½”)
ø25mm (1”) Inclusive Length 14mm (⅝”)
ø38mm (1½”) Inclusive Length 26mm (1”)

Flared Disc

ø19mm (¾”) Inclusive Length 17mm (⅞”)
ø25mm (1”) Inclusive Length 21mm (⅞”)
ø38mm (1½”) Inclusive Length 34mm (1⅝”)



Forged Disc

ø19mm (¾”) Inclusive Length 2mm (⅛”)
ø25mm (1”) Inclusive Length 3mm (⅛”)
ø38mm (1½”) Inclusive Length 3mm (⅛”)
ø50mm (2”) Inclusive Length 4mm (⅜”)



Ball & Collar

ø19mm (¾”) Inclusive Length 55mm (2⅜”)
ø25mm (1”) Inclusive Length 65mm (2⅝”)
ø38mm (1½”) Inclusive Length 75mm (2⅞”)
ø50mm (2”) Inclusive Length 103mm (4⅞”)



Hammered Disc

ø19mm (¾”) Inclusive Length 2mm (⅛”)
ø25mm (1”) Inclusive Length 3mm (⅛”)
ø38mm (1½”) Inclusive Length 3mm (⅛”)
ø50mm (2”) Inclusive Length 4mm (⅜”)



Crystal Ball & Collar

ø19mm (¾”) Inclusive Length 65mm (2⅝”)
ø25mm (1”) Inclusive Length 75mm (2⅞”)
ø38mm (1½”) Inclusive Length 103mm (4⅞”)



Hammered Ball & Collar

ø19mm (¾”) Inclusive Length 55mm (2⅜”)
ø25mm (1”) Inclusive Length 65mm (2⅝”)



Ball & Claw

ø19mm (¾”) Inclusive Length 75mm (2⅝”)
ø25mm (1”) Inclusive Length 90mm (3⅝”)
ø38mm (1½”) Inclusive Length 120mm (4¾”)



Ribbed Ball & Collar

ø19mm (¾”) Inclusive Length 60mm (2⅜”)
ø25mm (1”) Inclusive Length 80mm (2⅝”)



Twisted Knot

ø19mm (¾”) Inclusive Length 90mm (3⅝”)
ø25mm (1”) Inclusive Length 95mm (3¾”)
ø38mm (1½”) Inclusive Length 150mm (5⅞”)

Due to manufacturing process's size and shape may vary slightly to images above | ✨ Crystal Finials should not be positioned in direct sunlight
For full technical information, sizes and weights please download the specification guide - www.bradleycollection.com/downloads/

FINIALS

The true craft of the artisan is on display with these designs.

Pictured left to right: ø25mm (1") Pole | Jacobs Horn • Waxed Curling Leaf • Bronzed - Satin | Loop • Antique Brass - Satin Buffon Stud • Matte Brass Toned | Pebble • Natural Steel



Hammered Spear👉

ø19mm (¾") Inclusive Length 122mm (4⅜")
ø25mm (1") Inclusive Length 150mm (5⅞")



Double Ball Basket👉

ø19mm (¾") Inclusive Length 142mm (5⅞")
ø25mm (1") Inclusive Length 146mm (5¾")
ø38mm (1½") Inclusive Length 205mm (8⅛")



Loop👉

ø19mm (¾") Inclusive Length 115mm (4½")
ø25mm (1") Inclusive Length 135mm (5⅝")
ø38mm (1½") Inclusive Length 180mm (7⅙")



Curling Leaf👉👈

ø19mm (¾") Inclusive Length 110mm (4⅝")
ø25mm (1") Inclusive Length 140mm (5½")
ø38mm (1½") Inclusive Length 200mm (8")



Tusk👈👉

ø19mm (¾") Inclusive Length 118mm (4⅝")
ø25mm (1") Inclusive Length 141mm (5⅝")



Jacob's Horn👈👉

ø19mm (¾") Inclusive Length 105mm (4⅞")
ø25mm (1") Inclusive Length 130mm (5⅞")
ø38mm (1½") Inclusive Length 180mm (7⅙")



Square Ram's Horn👉

ø19mm (¾") Inclusive Length 120mm (4¾")
ø25mm (1") Inclusive Length 135mm (5⅝")



Reverse Square Ram's Horn👈👉

ø19mm (¾") Inclusive Length 55mm (2⅞")
ø25mm (1") Inclusive Length 55mm (2⅞")

👉 Due to manufacturing process's size and shape may vary slightly to images above | 🤝 Handed Item - Left and Right version available
For full technical information, sizes and weights please download the specification guide - www.bradleycollection.com/downloads/

BRACKET OPTIONS

SINGLE *For straightforward applications.*

Side		Diameter	Projection from wall to pole centre	Fixing plate size	Covered Fixing plate size
		ø12.5mm (½")	40mm (1⅙")	w18mm (⅞") x h63mm (2½")	n/a
		ø19mm (¾")	60mm (2⅜") • 100mm (4")	w20mm (⅞") x h84mm (3⅝")	w24mm (1⅝") x h88mm (3⅞")
		ø25mm (1")	60mm (2⅜") • 100mm (4")	w25mm (1") x h102mm (4")	w29mm (1⅛") x h106mm (4⅜")
		ø38mm (1½")	100mm (4")	w30mm (1⅙") x h117mm (4⅝")	w34mm (1⅝") x h121mm (4⅞")
		ø50mm (2")	100mm (4")	w30mm (1⅙") x h117mm (4⅝")	w34mm (1⅝") x h121mm (4⅞")
Mid	Passing ☉	Diameter	Projection from wall to pole centre	Fixing plate size	Covered fixing plate size
		ø12.5mm (½")	40mm (1⅙")	w50mm (2") x h18mm (⅞")	n/a
		ø19mm (¾")	60mm (2⅜"), 100mm (4")	w55mm (2⅜") x h20mm (1⅜")	w59mm (2⅝") x h24mm (1⅝")
		ø25mm (1")	60mm (2⅜") • 100mm (4") • 140mm (5½") ☉	w60mm (2⅜") x h25mm (1")	w64mm (2½") x h29mm (1⅞")
		ø38mm (1½")	100mm (4")	w80mm (3⅞") x h30mm (1⅙")	w84mm (3⅝") x h34mm (1⅝")
		ø50mm (2")	100mm (4")	w80mm (3⅞") x h30mm (1⅙")	w84mm (3⅝") x h34mm (1⅝")
Ceiling	Passing	Diameter	Drop from ceiling to pole centre	Fixing plate size	
		ø19mm (¾")	60mm (2⅜") • 100mm (4")	w55mm (2⅜") x h20mm (1⅜")	
		ø25mm (1")	60mm (2⅜") • 100mm (4")	w60mm (2⅜") x h25mm (1")	
		ø38mm (1½")	100mm (4")	w80mm (3⅞") x h30mm (1⅙")	

RECESS *Designed for rebates.*

Recess <i>With hook stop</i>	Diameter	Depth off wall	Fixing plate size
	ø19mm (¾")	4mm (⅜")	ø42mm (1⅝")
	ø25mm (1")	4mm (⅜")	ø50mm (2")
	ø38mm (1½")	4mm (⅜")	ø72mm (2⅜⅝")
	ø50mm (2")	4mm (⅜")	ø72mm (2⅜⅝")

FRENCH *For the classic French look.*

French - End	Diameter	Projection from wall to pole centre	Fixing plate size	Covered fixing plate size
	ø25mm (1")	100mm (4"), 140mm (5½") ☉	w30mm (1⅙") x h80mm (3⅞")	w33mm (1⅝") x h83mm (3¼")

CAFÉ BRACKETS *Designed for privacy.*

Café - End	Diameter	Depth off wall	Fixing plate size
	ø12.5mm (½")	6mm (¼")	ø25mm (1")
Café - Face <i>Drop in option available</i>	Diameter	Projection from wall to pole centre	Fixing plate size
	ø12.5mm (½")	25mm (1") • 40mm (1⅙")	w30mm (1⅙") x h80mm (3⅞")

☉ 140mm (5½") Mid & Passing brackets only available on French poles. | ☉ Passing option not available on 12.5mm (½")
For full technical information, sizes and weights please download the specification guide - www.bradleycollection.com/downloads/

ADJUSTABLE *Designed to give flexibility during installation.*

Side		Diameter	Projection from wall to pole centre	Fixing plate size
		ø19mm (¾")	Min.90mm (3⅜") Max.110mm (4⅝")	w55mm (2⅜") x h84mm (3⅝")
		ø25mm (1")	Min.90mm (3⅜") Max.110mm (4⅝")	w60mm (2⅜") x h102mm (4")
		ø38mm (1½")	Min.100mm (4") Max.120mm (4¾")	w80mm (3⅞") x h117mm (4⅝")
Mid	Passing	Diameter	Projection from wall to pole centre	Fixing plate size
		ø19mm (¾")	Min.65mm (2⅝") Max.150mm (5⅞")	w55mm (2⅜") x h20mm (1⅜")
		ø25mm (1")	Min.75mm (2⅞⅝") Max.175mm (6⅞")	w60mm (2⅜") x h25mm (1")
		ø38mm (1½")	Min.95mm (3¾") Max.200mm (7⅞")	w80mm (3⅞") x h30mm (1⅙")

DOUBLE *Designed for layered shading.*

Side		Diameter	Projection from wall to pole centre	Fixing plate size	
		Fø25mm (1")	F160mm (6 ⁵ / ₁₆ ")	w25mm (1")	
		Bø19mm (3/4")	B60mm (2 ³ / ₈ ")	x H102mm (4")	
		Fø38mm (1 ¹ / ₂ ")	F160mm (6 ⁵ / ₁₆ ")	w30mm (1 ³ / ₁₆ ")	
		Bø25mm (1")	B60mm (2 ³ / ₈ ")	x H117mm (4 ⁵ / ₈ ")	
Mid	Passing	Diameter	Projection from wall to pole centre	Mid fixing plate size	Passing fixing plate size
		Fø25mm (1")	F160mm (6 ⁵ / ₁₆ ")	w60mm (2 ³ / ₈ ")	w112mm (4 ⁷ / ₁₆ ")
		Bø19mm (3/4")	B60mm (2 ³ / ₈ ")	x H25mm (1")	x H50mm (2")
		Fø38mm (1 ¹ / ₂ ")	F160mm (6 ⁵ / ₁₆ ")	w80mm (3 ³ / ₈ ")	w122mm (4 ¹³ / ₁₆ ")
		Bø25mm (1")	B60mm (2 ³ / ₈ ")	x H30mm (1 ¹ / ₁₆ ")	x H60mm (2 ³ / ₈ ")


CUSTOM BRACKETS *Specialist designs can be produced for awkward or unusual installations. ⚙*

Custom Projection	Custom Fixing Plate	Uplift	Arm	Angled Brackets
				
Specify the exact projection needed.	Relevant where space is restricted or weight is a concern.	Helps negotiate cornice and similar architectural features.	For really tricky installations, arms without backplates can be designed for direct fixing.	The solution for tight and awkward locations.

⚙ Custom Brackets shown are for illustration purposes. Brackets are designed on a project basis to specific requirements

CLASSIC RINGS

Steel rings are of a classic, unlined nature reflecting the authenticity of the collection.

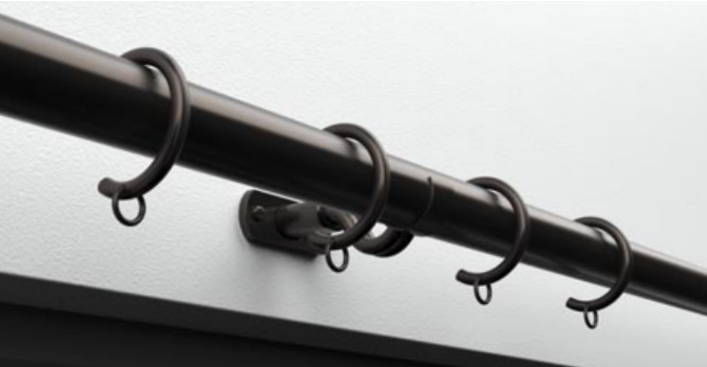

Ring



Ø12.5mm (½") Ring dropⓈ 38mm (1½")
Ø19mm (¾") Ring dropⓈ 44mm (1¾")
Ø25mm (1") Ring dropⓈ 49mm (1⅝")
Ø38mm (1½") Ring dropⓈ 63mm (2½")
Ø50mm (2") Ring dropⓈ 82mm (3¼")

Passing Ring Ⓢ



Ø12.5mm (½") n/a
Ø19mm (¾") Ring dropⓈ 49mm (1⅝")
Ø25mm (1") Ring dropⓈ 54mm (2⅞")
Ø38mm (1½") Ring dropⓈ 71mm (2⅜")
Ø50mm (2") Ring dropⓈ 89mm (3½")


Ⓢ Ring drop from top of pole to bottom of ringlet | Ⓢ Passing option not available on 12.5mm (½")

POLES

Poles are cut, bent and curved to suit individual requirements. When calculating the length of your pole, remember to allow tolerance beyond the width of the frame for the curtains to draw back to the edge of the window.

Poles exceeding the recommended maximum distance between brackets, will be cut into equal parts unless otherwise specified.

Pole joiners will be supplied.

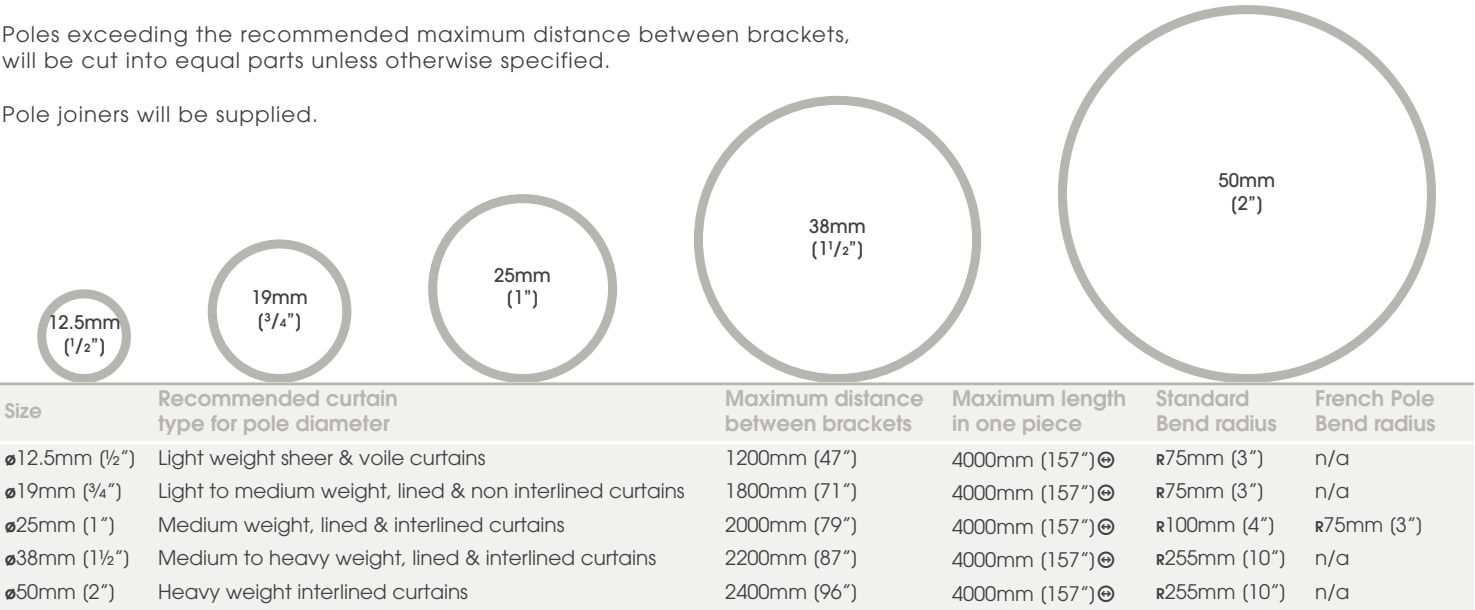

Ⓢ Section lengths over 2.4m (94") will incur a handling charge
For full technical information, sizes and weights please download the specification guide - www.bradleycollection.com/downloads/

ACCESSORIES

Ombres

Large Stud



Internal projection from wall: 125mm (4⅝")
Fixing plate size: ø60mm (2⅜")

Ball & Collar



Internal projection from wall: 125mm (4⅝")
Fixing plate size: ø60mm (2⅜")

Hold back

Standard Stud



Internal measurement: 134mm (5¼")
Fixing plate size: w20mm (⅞") x H56mm (2⅜")

Ball & Collar



Tie Back Hook



Internal measurement: 27mm (1⅛")
Fixing plate size: w20mm (⅞") x H78mm (3⅜")

Drapery Arm

Drapery arms have been designed to work at dormer windrows, doorways & above beds.



Diameter: ø25mm (1")
Fixing plate size: w30mm (1⅜") x H185mm (7¼")

Draw RodsⓈ

Standard Stud



Ball & Collar



Draw rod length: 1000mm (39⅜")
Custom lengths available to order

STEEL

Ⓢ Not recommended for use with passing rings.